




## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 38042	03/11	STW
Α	DCN 41508	07/15	STW







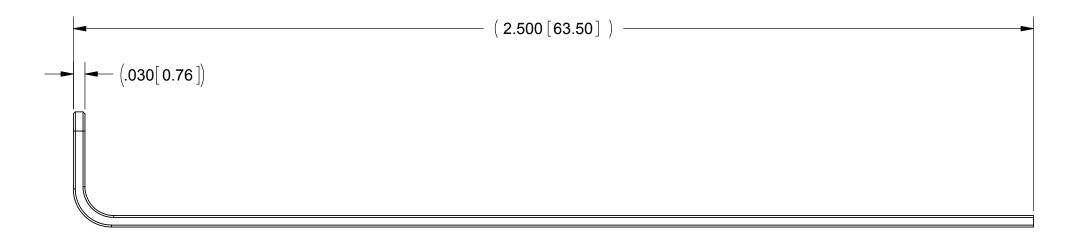

## **MATERIAL**:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

## FINISH:

PASSIVATED PER AMS-2700

	MATERIAL:	SEE NOTES		
	FINISH:	SEE NOTES		
SURFACE AREA: N/A		EA: N/A		
		PROPRIETARY		

DIMENSIONS ARE IN INCHES TOLERANCES:	
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'	
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005	
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	

6	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES , 005 R. MAX. 4) CHAM 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA:S ON COMMON CENTERS TO BE CONCENTRIC WITHIN , 004 T.I.R. 7) REMOVE ALL BURRS	

UNLESS OTHERWISE SPECIFIED

THIRD ANGLE PROJECTION	DRAWN:	FED 03/01/1
	CHECKED:	STW 03/01/1
	APPROVED:	STW 03/01/1



SMPM FEMALE CABLE REMOVAL TOOL

	95077	DWG. NO. 50	0-32-010
SCALE: 4:1			SHEET 1 O

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connector Tools category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

R282744011 R282744220 R282120010 4-1532129-0 6-1337482-0 R282730040 R282743120 R282744100 23W100-000 23W101-000 227
1497 R282589210 R282967015 R282918210 GK-S600TT GK-S240TT CS24-1 500-32-015 W1W005-000 W1W001-000 500-32-004

500-38-002 500-32-008 227-T2000 500-12-019 500-32-007 500-32-022 500-38-004 500-38-006 500-38-008 500-80-014 D.FL75-LP-N

CAS-BNC-T R282868280 19W002-000 6006330101 1055454-1 GK-S400TT 500-12-000 X.FL-LP-IN.OUT1 500-32-010 W1W002-000

RFMODE1.5 CS10 CS12 CS14 CS16 CS20 CS32 CS8