


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
A	HK	RELEASED TO CUSTOMER	08/01/02	Y.M.LEE
B	HK	ADD CHOP OF ROHS	7/28/06	IP

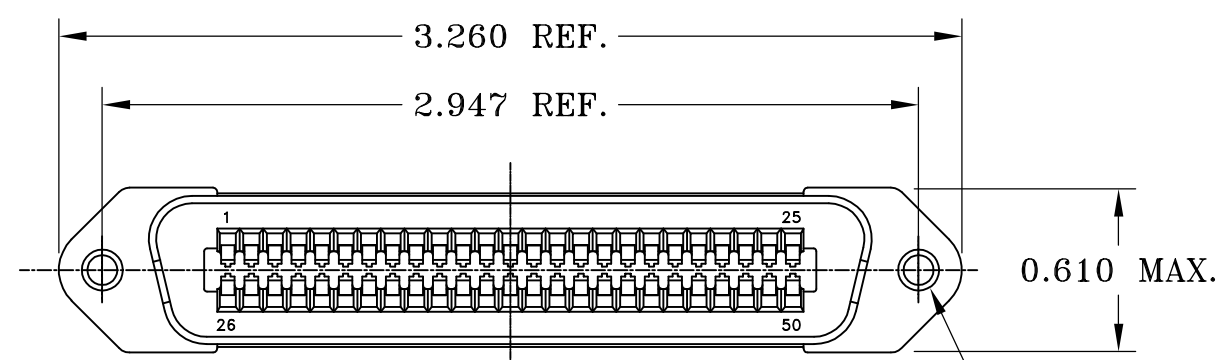

MOUNTING HOLE
0.108" MIN. DIA.

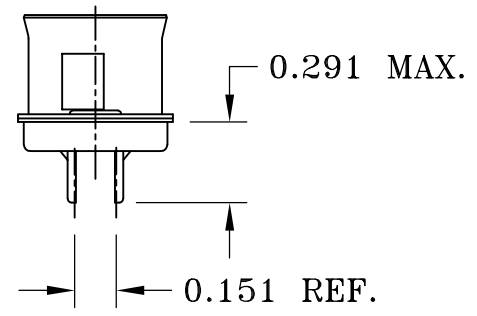
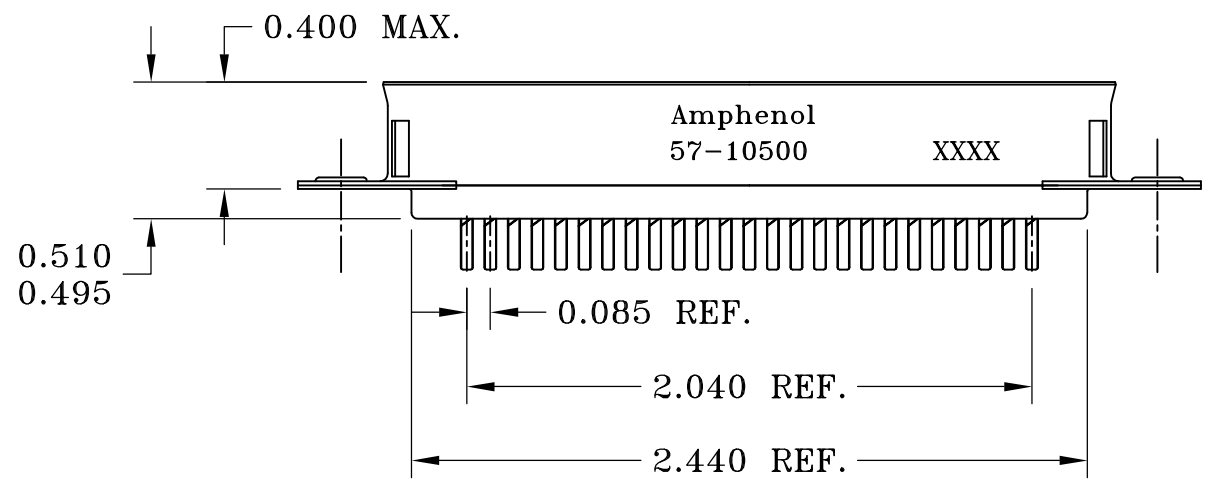


TABLE 1

CONNECTOR SIZES	AVERAGE MATING FORCE (POUNDS)
14	5
24	8
36	12
50	15
64	19

SPECIFICATIONS:

- 1) SOLDER CUP CONTACT: TO ACCOMMODATE 22-30 AWG SOLID AND 24-30 STRANDED CONNECTOR WIRES.
- 2) DIELECTRIC: DIALYL-PHTHALATE PER MIL-M-14F TYPE MDG UL-94V0
- 3) CONTACT MATERIAL: COPPER ALLOY
- 4) CONTACT: 20 MICRO-INCHES MIN. GOLD MATING AREA: 3-5 MICRO-INCHES GOLD TERMINAL AREA: 50 MICRO-INCHES MIN. NICKEL UNDERPLATING ALL OVER.
- 5) SHELL MATERIAL: ZINC PLATED STEEL WITH CLEAR CHROMATE COATING
- 6) CURRENT CAPACITY: 5 AMPS/CONTACT
- 7) VOLTAGE RATING: 700 VOLTS D.C. AT SEA LEVEL
200 VOLTS D.C. AT 70,000 FEET
- 8) INSULATION RESISTANCE: >5000 M OHM
- 9) DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC (RMS) AT SEA LEVEL
- 10) CONNECTOR MATING FORCE: REFER TO TABLE 1.

- 11) CONTACT RETENTION FORCE: 2 LBS MAX.
- 12) DURABILITY: 250 CYCLES MIN.
- 13) VIBRATION: NO INTERRUPTIONS < 1u SEC.
- 14) OPERATING TEMPERATURE: -55°C TO +105°C (-67°F TO +221°F)



CUSTOMER INFORMATION DRAWING

ITEM NO	NOMENCLATURE OR DESCRIPTION	QTY REQ'D																	
PARTS LIST																			
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL DRAWN XS.GUO CHECKED																	
<table border="0"> <tr> <td></td> <td>U.S.</td> <td>METRIC</td> </tr> <tr> <td>.X</td> <td>+/- .015</td> <td>/</td> </tr> <tr> <td>.XX</td> <td>+/- .010</td> <td>/</td> </tr> <tr> <td>.XXX</td> <td>+/- .005</td> <td>/</td> </tr> <tr> <td>FRACTIONS</td> <td>+/-</td> <td></td> </tr> <tr> <td>ANGLES</td> <td>+/- 1°</td> <td></td> </tr> </table>				U.S.	METRIC	.X	+/- .015	/	.XX	+/- .010	/	.XXX	+/- .005	/	FRACTIONS	+/-		ANGLES	+/- 1°
	U.S.	METRIC																	
.X	+/- .015	/																	
.XX	+/- .010	/																	
.XXX	+/- .005	/																	
FRACTIONS	+/-																		
ANGLES	+/- 1°																		
FOR MATERIALS AND FINISHES SEE NOTES		DATE 7/28/06																	
REMOVE SHARP EDGES		DRAWING FILE: \DRAWING\57\C5710500REVA.DWG																	
DIMENSIONS																			
U.S.	INCHES	<table border="0"> <tr> <td>ANGLE OF PROJECTION</td> <td rowspan="2"> </td> </tr> <tr> <td>-(METRIC)</td> <td>-(MM)</td> </tr> </table>	ANGLE OF PROJECTION		-(METRIC)	-(MM)													
ANGLE OF PROJECTION																			
-(METRIC)		-(MM)																	
TITLE		<table border="0"> <tr> <td colspan="2" style="text-align: center;">Amphenol</td> </tr> <tr> <td colspan="2" style="text-align: center;">50 SIZE PLUG ASSY, RACK & PANEL MINIATURE RIBBON</td> </tr> </table>	Amphenol		50 SIZE PLUG ASSY, RACK & PANEL MINIATURE RIBBON														
Amphenol																			
50 SIZE PLUG ASSY, RACK & PANEL MINIATURE RIBBON																			
SIZE	DRAWING NO.	REV.																	
A3	C57-10500	B																	
SCALE	NONE	SHEET 1 OF 1																	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[571763P](#) [58098-0628](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [PCR-E36PM](#) [PCS-XE26MA+](#) [G38A71314B](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [U90B2054081210](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [0709821002](#) [DX40-20P\(55\)](#) [5554841-1](#) [MS3474W18-8P-LC*](#) [SM3106F14S-7S-LC](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [747360449](#) [10099439-003C-TRLF](#) [10137239-0021LF](#)