


Quadrax Contacts



ABS0973

ABS0974


EN3155

Description

Amphenol Socapex Quadrax contacts offer several advantages for high data transfer rates, low power consumption and excellent EMI compatibility.

Main Features

- Four strategically spaced inner contacts form two 100 or 150 Ohm matched impedance differential pairs
- Outer contact has rugged wall section for durability
- Available in size 8 crimp termination style
- Also available in size 8 with PC tails
- Requires modification of MIL-DTL-38999 connector to accommodate keyed contacts

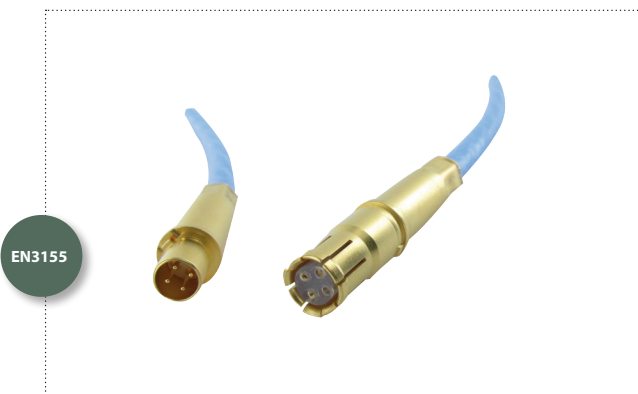

EN3155

*MIL-DTL-38999 series I and III Connectors
EN3645 Connectors
EN4165/SIM Connectors*



ABS0973

ABS0974

ARINC 600 Connectors

Markets & Applications



C4ISR



Commercial Aerospace



Ground Vehicle



Space



Applications :

- Ethernet
- AFDX (Avionics Full Duplex Switched Ethernet)
- Cockpit (display) and IFE

QUADRAX CONTACTS

Technical Characteristics (Extract from EN3155-074/075)

Mechanical

- Endurance: minimum 500 mating / unmating operations in any connector
- Shocks: EN2591-402 method A
- Vibrations (MIL-DTL-38999) : EN2591-40
 - Method A : sinusoidal
 - Method B (figure 3 and table 2, level J) : Random

Environmental



- Salt spray: 48 hours minimum
- Temperature range: -65°C, +200°C

Material

- Inner contact: copper alloy
- Body: copper alloy
- Insulator: thermoplastic
- Contact plating: gold over nickel plated

Electrical performances

- Contact resistance
 - signal contacts (low level): Initial 6mΩ, after tests 7,5mΩ
- Contact resistance at rated current:

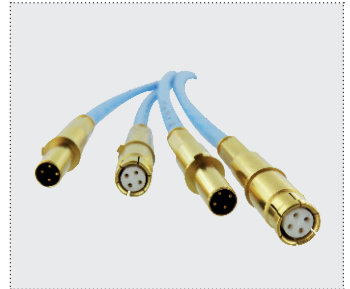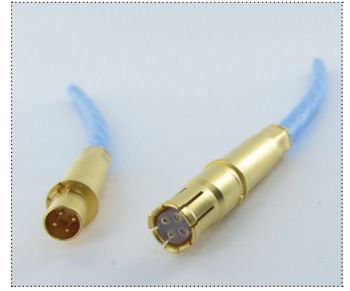

Contact	Rated current (A)	Max contact resistance (mΩ)		
		23°C		200°C
		Initial	After tests	
Signal contacts	1	6	7,5	10
Outer body	12	2	4	6

Dielectric withstanding voltage:

- Sea level :
 - 1000 Vrms between signal contacts
 - 500 Vrms between signal contacts and outer body
- 21000m:
 - 125 VRms between signal contacts and signal contacts and outer body
- Insulation resistance: at ambient temperature > 5000 MΩ, at high temperature > 1000 MΩ
- Characteristic impedance: 100Ω@100MHz
- Attenuation ≤ 0.3 dB@100 MHz typical per contact pair (cat 5E requirement = 0.3 dB@100 MHz)
- Crosstalk ≥ 40 dB @ 100 MHz typical (cat5E requirement = 40 dB)

QUADRAX CONTACTS

Portfolio

Contact Size	Cable	Contact Part Number				Impedance (Ohms)	Inner conductor Gauge	Electrical Protocol	Crimping Tools	
		Pin	Socket	Inner contact	Outer contact					
8	Draka Fileca F-4703-3, F4704-4, Filotex ET 2PC236, Filotex ET2PF870, PIC Wire E50424, ABS0972, Tensolite 23450/04090X-4(LD) Draka Fileca F-4704-5, ABS1503 KD 24	900496	900361			100	24	Ethernet, 1000 Base-T Gigabit Ethernet	M22520/2-01 with Positioner M22520/2-37 or with Daniels Positioner K709	M22520/5-01 with Die Set M22520/5-45 (Location A)
	Tensolite NF24Q100, NF24Q100-01, 24443/9P025X-4(LD), S280W502-4, 24443/03130X-4(LD), 24443/C20714X-4(LD), 24450/0120X-4(LD), NF24-2Q100, TYCO CECRWC-18664, GORE GSC-01-81869-01, 24443/03166X-4(LD), Thermax T956-4T200, Pic Wire E51424, Thermax MX100Q-24, NF24Q100-01-200C (Space), BMS13-72T03C04G024	900330	900338							
	Tensolite NF22Q100, NF22Q100-01, Thermax 956-5, GORE RCN 7688	900410	900411							
	Tensolite NF26Q100, NF26Q100-01, NF26-2Q100, PIC E51426, Wirenetics W-3714-379	600514	600516							
	S280W502-4/BMS13-72T03C04G024	600953	600954							
	Draka Fileca F-4704-6, Gore RCN 8672	600513	600515							
	Tensolite NF24Q100, NF24Q100-01 for 2.5 Gbps applications	600951	600952							
	Gore 8647	600955	600956							
	USB2 (28433/02171LX-4)	600987	600958	90						
	Tensolite 24450/03089X-4(LD) Gore RCN8647	050998	050999							
JSFY02-1, JSFY18	600959	600960	110							
Gore RCN8487, JSFY18	600961	600962								
Tensolite 26473/02006X-4(LD)/Gore RCN8328 (not for new designs, use 21-033450/1 series)	900327	900337	150	26						


EN3155-074 and -075 crimp contacts

Contact Size	Cable	Contact Part Number				Impedance (Ohms)	Inner conductor Gauge	Electrical Protocol	Crimping Tools	
		Pin		Socket					Inner contact	Outer contact
8	ABS1503KD24	600963	EN3155-074M8A	600964	EN3155-075F08A	100	24	Ethernet, 1000 Base-T Gigabit Ethernet	M22520/2-01 with Positioner M22520/2-37 or with Daniels Positioner K709	M22520/5-01 with Die Set M22520/5-45 (Location B)
		603085	EN3155-074M08	603086	EN3155-075F08					



Print circuit board contacts

Contact Size	Release	Type	Contact Part Number		Impedance (Ohms)
			PIN	SOCKET	
8	Rear	CI	900210	600520	100
	Rear	LI	600512	600519	

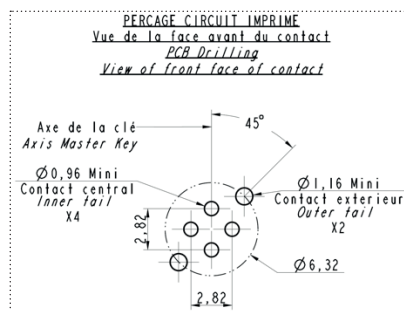

QUADRAX CONTACTS

Portfolio - ARINC600, EN3545

Contact Size	Cable	Contact Part Number		Impedance (Ohms)	Inner conductor Gauge	Electrical Protocol	Crimping Tools	
		Pin	Socket				Inner contact	Outer contact
8	ABS0972 ABS1503KD24	603113	603116	100	24	Ethernet, 1000 Base-T, Gigabit Ethernet, ARINC664	M22520/2-01 with positionner K709	M22520/5-01 with Die set M22520/5- 45 (Location A)
	Tensolite NF24Q100, NF24Q100-01, 24443/9P025X-4(LD), S280W502-4, 24443/03130X-4(LD), 24443/0120X-4(LD), NF24-2Q100, TYCO CECRWC-18664, GORE GSC-01-81869-01, 24443/03166X-4(LD), Thermax T956-4T200, Pic Wire E51424, Thermax MX100Q-24, NF24Q100 01-200C (Space), BMS13 72T03C04G024	603210	603209					M22520/5-01 with Die set M22520/5- 45 (Location B)
	DRAKA F4703-3	603333	603280					M22520/5-01 with Die set M22520/5-45 (Location A)

Print circuit board contacts

Contact Size	Release	Contact Part Number		Impedance (Ohms)	Connector	
		Pin	Socket		ARINC600	EN3545
8	Front	603228		100	√	
	Rear	603177	603229			



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Contacts](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[006-1189-20](#) [M39029/106-616](#) [71-VEAM](#) [809-023](#) [809-111](#) [811393-000](#) [850-014](#) [97-45-1418P-5\(920\)](#) [97-45-1418S-4](#) [D-602-0106CS076](#)
[AIC12-14P](#) [AIC16-16PG](#) [AIC8-12P](#) [AIC8-8SG](#) [AIC8-8SRAD](#) [1495044-1](#) [BACC47CP2T](#) [BACC47CP3S](#) [BACC47DP4](#) [BACC47GC1A](#)
[BACC47GN1](#) [16968/2C](#) [173-900245-91](#) [241611N001](#) [2560-220-2031](#) [27915-38T9](#) [27964-38T112](#) [2M809-118](#) [97-67-36-20](#) [AIC12-16P](#)
[AIC16-14SG](#) [AIC16-18PG](#) [AIC16-18S](#) [AIC16-20PG](#) [AIC4-4PG](#) [CE102S-18](#) [M39029/30-221](#) [M39029/77-430](#) [416-2020-088I](#) [MDM-](#)
[21SH003B-F222](#) [BA-4120-50LD](#) [BACC47CN2](#) [BACC47GC3A](#) [BACC47GD3A](#) [BACC47GM1](#) [52G137 REV A](#) [CB2-18-21PS](#) [D-602-](#)
[1116CS2727](#) [D-602-1117CS2727](#) [419-2082-102](#)