
PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
01	PRELIMINARY	05/22	
			SEE PDM

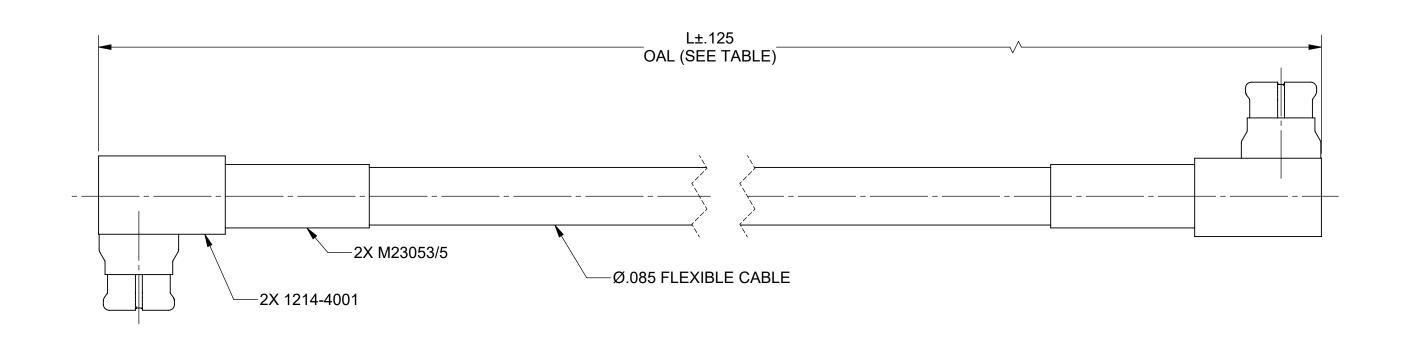

MATERIAL:

2 SMP R/A FEMALE CONNECTORS: 1214-4001

T-FLEX 405 CABLE: T-FLEX 405

SINGLE WALL TUBING: M23053/5 (BLACK)

PERFORMANCE:

IMPEDANCE:50 OHMSFREQ. RANGE:DC TO 26.5 GHzVSWR:1.85:1 DC TO 26.5 GHzINSERTION LOSS:SEE TABLE

SV P/N	L (OAL)	INSERTION LOSS dB MAX.
7012-1981	12.000"	1.96
7012-1982	6.000"	1.29

	DIMENSIONS ARE IN INCHES TOLERANCES			
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' +15'			
	DECIMAL: .X ±.030 .XX ±.010			
	.XXX ±.005			
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994			
WING	THIRD ANGLE PROJECTION			

ONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' AL: X ±.030	1) ALL DIMENSIONS ARE IN IP 2) ALL DIMENSIONS ARE AFT 3) BREAK CORNERS & EDGE 4) CHAM. 1ST & LAST THREA 5) SURFACE ROUGHNESS 63 6) DIA: SO N COMMO CENTI WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	S .005 R. MAX. DS. &MIL-STD-10.
RD ANGLE PROJECTION	DRAWN:	SRM 05/02/22
	CHECKED:	SEE PDM
W U U	APPROVED:	SEE PDM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] ALL DIMENSIONS ARE AFTER PLATING. BREAK CORNERS & BOGGES .005 R. MAX. CHAM. 13T & LAST THREADS. SURFACE ROUGHNESS 63.MIL-STD-10. DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. REMOVE ALL BURRS		MICROWAVE www.svmicrowave.com	
		TITLE:	SMP R/A FEMALE TO SMP
		F	R/A FEMALE Ø.085 FLEXIBLE
DRAWN:	SRM 05/02/22		CABLE ASSEMBLY

SIZE B	DWG. NO.	7012-198	31-1982
SCALE: 1:1			SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

73-6352-10 73-6353-3 73-6364-6 MDM-21SH011F R285001001 R288940004 145111-05-12.00 1661-C-24 24P104C24J1-012 24P104C24P1-018 24P204C24J1-003 172-2150-EX FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 PTWY-24-78 R285001021 R285426000 R288940003 R288940008 R288940034 MDM-21PH006P-A174 4814-BB-24 5260-72 DLP-COAX1 4814-K-48 115101-09-06.00 MXHT83QE3000 73-6351-25 73-6352-3 73-6353-25 GD0BQ0BQ024.0 1-3636-600-5210 R284C0351060 R288940009 R284C0351028 R288940002 MDM-15SH006A 73-6353-10 R285020301W Minibend-4 BNC TO SMA Cable MIKROE-274 Minibend-10 Microbend MTR-11 PT815NN MF53/1x8A_21MXP/11SK/305 Minibend-3