
PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
01	PRELIMINARY	02/22			
02	PRELIMINARY	04/22	SEE PDM		

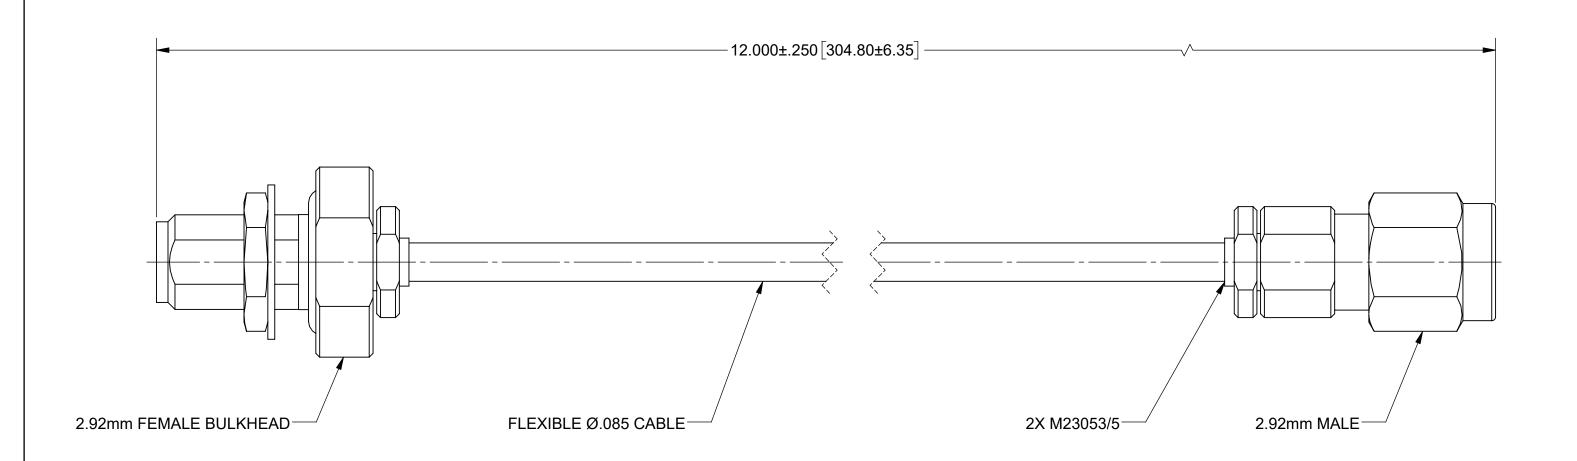

MATERIAL:

CONNECTORS: 2.92mm FEMALE BULKHEAD (SF1521-60025)

2.92mm MALE (SF1511-60071)

FLEXIBLE Ø.085 CABLE (200-70-139) CABLE:

SHRINK TUBING: M23053/5

PERFORMANCE:

IMPEDANCE: FREQ. RANGE:

50 OHMS DC TO 40.0 GHz

DIMENSIONS ARE IN IN	ICHES TOLERANCES:
FRACTIONAL: ±1/64	ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010	

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

THIRD ANGLE PROJECTION	DRAWN:	SJ 02/25/22
	CHECKED:	SEE PDM
	APPROVED:	SEE PDM

UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1915 & LAST THREADS.	MICROWAVE www.svmicrowave.com
4) CHAMIL 131 A LAST LITREAUS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	2.92mm FEMALE BULKHE 2.92mm MALE 12" Ø.085 C

2.92mm FEMALE BULKHEAD TO 2.92mm MALE 12" Ø.085 CABLE ASSEMBLY

SIZE B	DWG. NO.	7015-	1099
SCALE: 4:1			SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Cable Assemblies category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

73-6352-10 73-6353-3 73-6364-6 MDM-21SH011F R285001001 R288940004 145111-05-12.00 1661-C-24 24P104C24J1-012 24P104C24P1-018 24P204C24J1-003 172-2150-EX FCB-3030-ALT 21117-046 21117-050 PCX-24-50 24P103C24P2-003 PTWY-24-78 R285001021 R285426000 R288940003 R288940008 R288940034 MDM-21PH006P-A174 4814-BB-24 5260-72 DLP-COAX1 4814-K-48 115101-09-06.00 MXHT83QE3000 73-6351-25 73-6352-3 73-6353-25 GD0BQ0BQ024.0 1-3636-600-5210 R284C0351060 R288940009 R284C0351028 R288940002 MDM-15SH006A 73-6353-10 R285020301W Minibend-4 BNC TO SMA Cable MIKROE-274 Minibend-10 Microbend MTR-11 PT815NN MF53/1x8A_21MXP/11SK/305 Minibend-3