





PRODUCT NUMBER
73325-XXXLF

PLATING OPTION
1 = GXT 0.76 μ m
3 = GOLD 0.76 μ m
5 = GOLD 1.27 μ m

PACKAGE OPTION
1 = TAPE ON REEL
2 = TUBE
3 = TAPE ON REEL
IN PLASTIC BAG

TERMINAL LOADING
1 = FULLY LOADED
2 = POS 1,2,7,8
3 = POS 3,4,5,6

WHEN NEEDED, SUFFIX LETTER "LF" INDICATES THE PRODUCT IS ROHS COMPATIBLE, SEE NOTE 4.

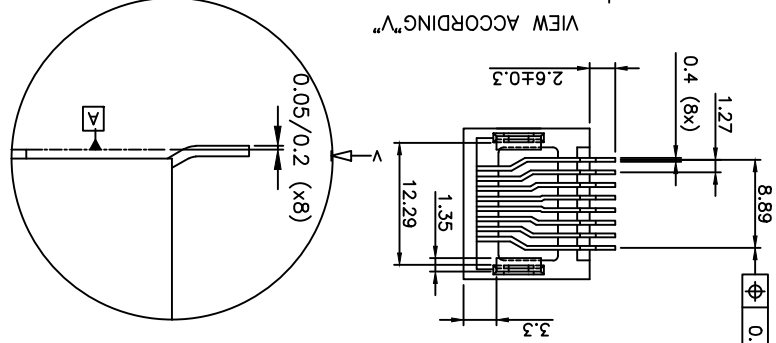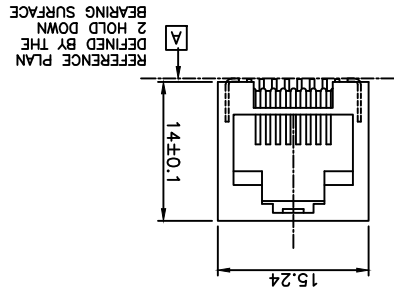

SEE NOTE 3

NOTES:
1 - MATERIAL: HOUSING: HIGH TEMP. PCT, COLOUR BLACK.
TERMINAL: PHOSPHOR BRONZE.
CONTACT AREA: SEE TABLE.
2 - PLATING: SOLDER TAIL : 90/10 SnPb 2 μ m MIN.
WHEN SUFFIX "LF" IS REQUIRED, 2 μ m MIN MATTE TIN OVER 1.27 MIN NI IS SUPPLIED INSTEAD OF SnPb.
NO RAW EDGES EXCEPT SOLDER TAIL TIPS
3 - SOLDER TAILS COPLANARITY : 0.1 mm
4 - ROHS COMPATIBLE PRODUCT SPECIFICATIONS

- a - PLATING: "LF" MEANS THE PRODUCT IS LEAD-FREE, 2 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM NICKEL UNDERPLATE.
- b - MANUFACTURING PROCESS COMPATIBILITY
- c - LABELING: THE HOUSING WILL WITHSTAND EXPOSURE TO 245°C PEAK TEMPERATURE FOR 30 SECONDS MAX IN A CONNECTION, INFRA-RED OR VAPOR PHASE OR REFLOW OVEN.
- d - LEGAL STATEMENT: SEE GS-47-0004
- e - MEETS PACKAGING SPECS AS PER GS-14-920
- f - TO PROTECT FROM MOISTURE DURING STACKING TIME.

5 - PACKAGING FOR OPTION 3: EACH REEL IS WRAPPED INTO A PLASTIC BAG TO PROTECT FROM MOISTURE DURING STACKING TIME.

mat'l. code		ISO 1302	surface tolerance	ISO 406 ISO 1101	projection	product family	MOD JACK
ltr	ecn no	dr	date	tolerances unless otherwise specified			
H	F06-0240	DLE	06.07.18	angles	linear	mm	
J	F09-0070	LSA	09.07.23	±Z	scale 2:1		
K	B-15798	JFA	13.09.09	SMT RA JACK			
L	F-21888	AMA	15.09.09	8 POS INSIDE			
F	F04-0363	DLE	04.10.18	product family			
G	F05-0247	DLE	05.09.12	MOD JACK			
sheet revision		L	E	B	title		
index		1	2	3	SMT RA JACK		
sheet		1	2	3	73325		
type		CUSTOMER Drawing					
dwg no		sheet 1 of 3 size					
type		CUSTOMER Drawing					



CUSTOMER COPY FOR REFERENCE ONLY



FCIconnect.com

Copyright FCI

PRODUCT NUMBER
SEE SHEET 1

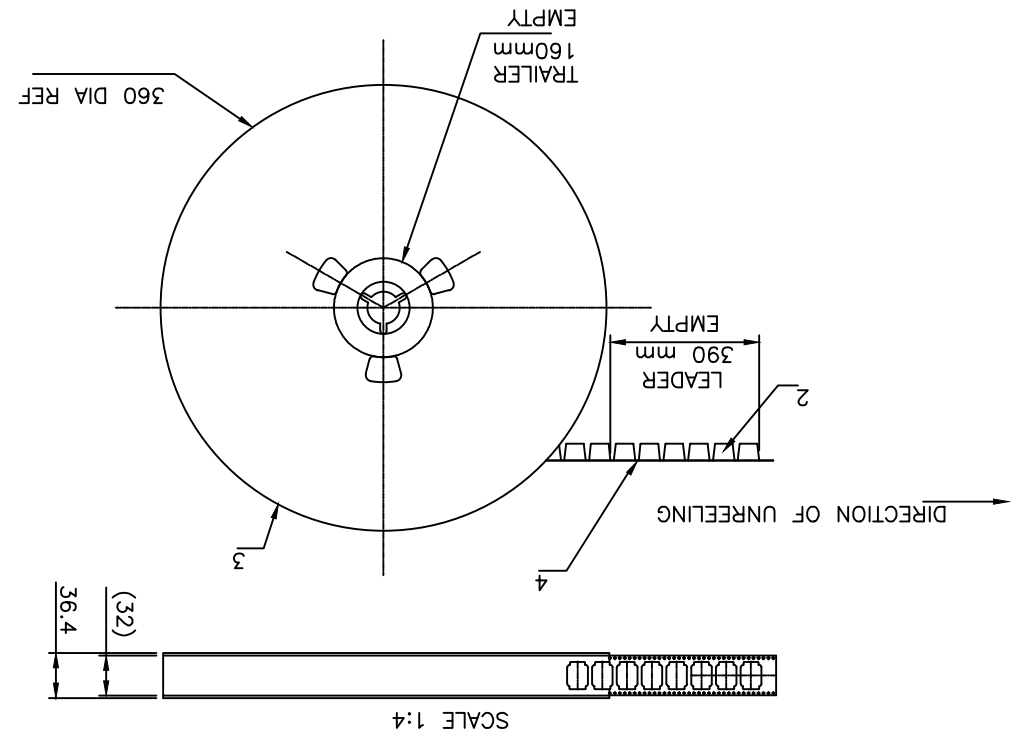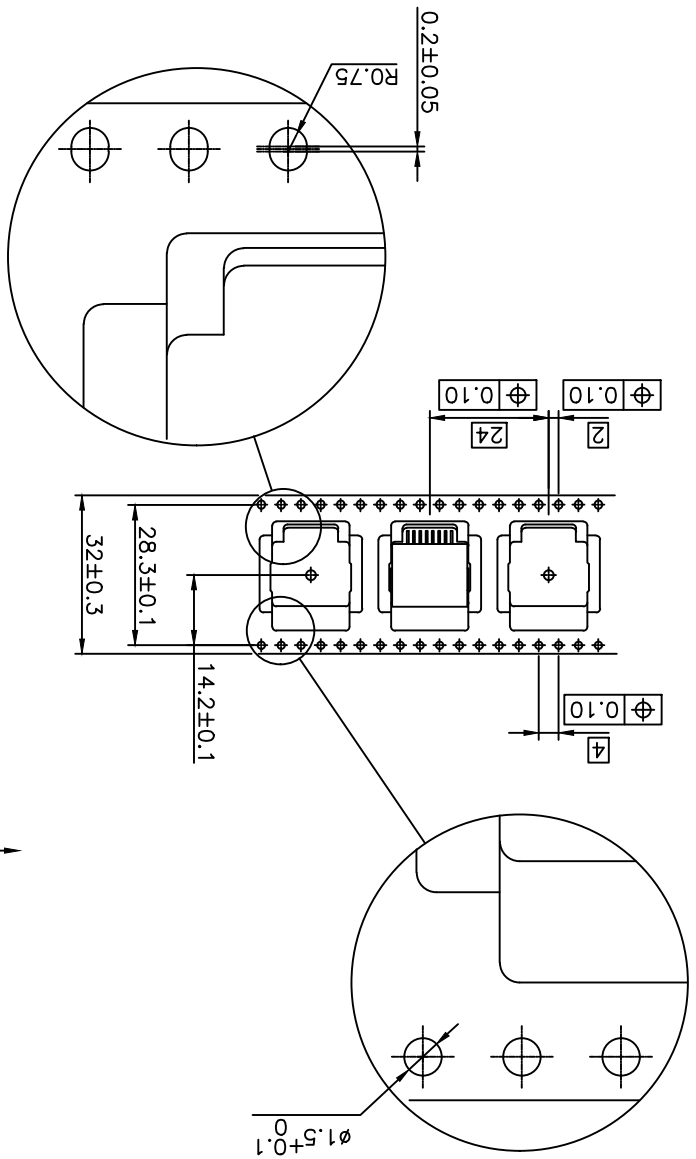

1 - IN ACCORDANCE WITH EIA-481 AND IEC 296-3


CUSTOMER COPY FOR REFERENCE ONLY

LTR	PART NAME	QTY
1	PRODUCT	230
2	TAPE	1
3	REEL	1
4	COVER TAPE	1

mat'l. code	surface	tolerance	projection	product family	title	dwg no	sheet 2 of 3 size
ISO 1302	ISO 1302	ISO 406 ISO 1001	ISO 1001	MOD-JACK	SMT RA JACK	73325	A3
ISO 1302	ISO 1302	ISO 406 ISO 1001	ISO 1001	MOD-JACK	SMT RA JACK	73325	A3
ISO 1302	ISO 1302	ISO 406 ISO 1001	ISO 1001	MOD-JACK	SMT RA JACK	73325	A3

mat'l. code		surface	ISO 1302	ISO 406 ISO 1001	projection	product family	MOD JACK
ltf	ecn no	dr	date	tolerances unless otherwise specified	±0.13	mm	mm
A	F04-0363	DLE	04.10.18		linear	angles	±Z
B	F06-0240	DLE	06.07.18		linear	linear	±Z
dr	D	LEGRAND	04.10.18		scale	2:1	
engr	P	NIZZI	04.10.18		SMT RA JACK		
chr	D	LEGRAND	04.10.18		8 POS INSIDE		
appr	P	NZ	04.10.18		title		
sheet	revision	CUSTOMER COPY FOR REFERENCE ONLY					

CUSTOMER COPY FOR REFERENCE ONLY

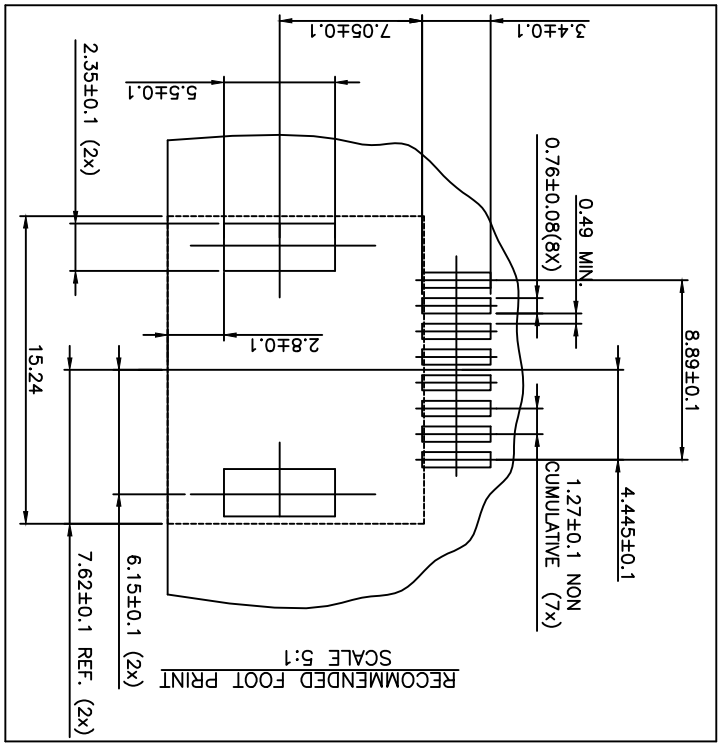

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[RJE231881317T](#) [MP1010RX-1000](#) [MP44RX-1000](#) [GAX-3-66](#) [GAX-8-62](#) [93606-0253](#) [GD-A-44](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-A-88](#) [GDLX-N-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-A-44](#) [GLX-N-1010M-BLK](#) [GLX-N-44M](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT2-N-1010](#) [GMX-SMT2-N-64-50](#) [GMX-SMT2-S6-88](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GRT1-BT1-5](#) [GSGX-N-2-88](#) [GSX-NS2-88-3.05](#) [GSX-NS2-88-3.05-50](#) [GSX-NS-88-3.05-30](#) [GSX-NS-88-3.05-50](#) [GSX-NS-88-3.68](#) [1-1775629-2](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [1300500326](#) [1300500227](#) [1300530003](#) [1300570002](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1400000](#) [1413176](#)