

COUPLING NUT - BRASS, WHITE BRONZE PLATING 2. ELECTRICAL: A. IMPEDANCE: 50 OHM B. FREQUENCY RANGE: DC - 18 GHz C. VSWR: I.IO MAX. DC - 6 GHz I.20 MAX. 6 - 18 GHz D. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO 165° C

E. INTERMODULATION 3rd ORDER: -166 dBc @2X20W

4 SHOWS CABLE ENTRY DIMESNIONS

5. PACKAGING:

A. QUANTITY: SINGLE PACK

B. MARKING: PACKAGING TO BE MARKED "AMPHENOL RF, 82-6673, AND DATE CODE"


6. ASSEMBLY INSTRUCTIONS:


<0.5mm 0.5 - 6mm

A. FOR SEMI-RIGID CABLE, THERMALLY CYCLE ACCORDING TO MANUFACTURERS SPECIFICATIONS.


B. STRIP CABLE AND INSERT THROUGH SHRINK TUBE

C. INSERT INSULATOR DISC OVER CENTER CONDUCTOR AND SOLDER CONTACT. ALL COMPONENTS SHOULD BE FLUSH.
D. PRESS CONTACT AND INSULATOR DISC INTO BODY ASSEMBLY UNTIL INSULATOR DISC BOTTOMS.
E. SOLDER BODY ONTO CABLE. 250 WATT SOLDERING IRON RECOMMENDED. USE OF FLUX RECOMMENDED.

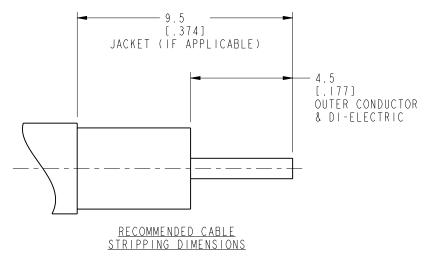

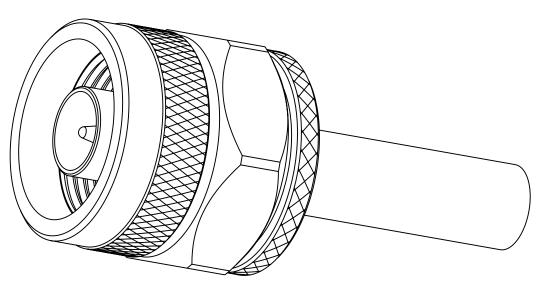

SCALE 3.000

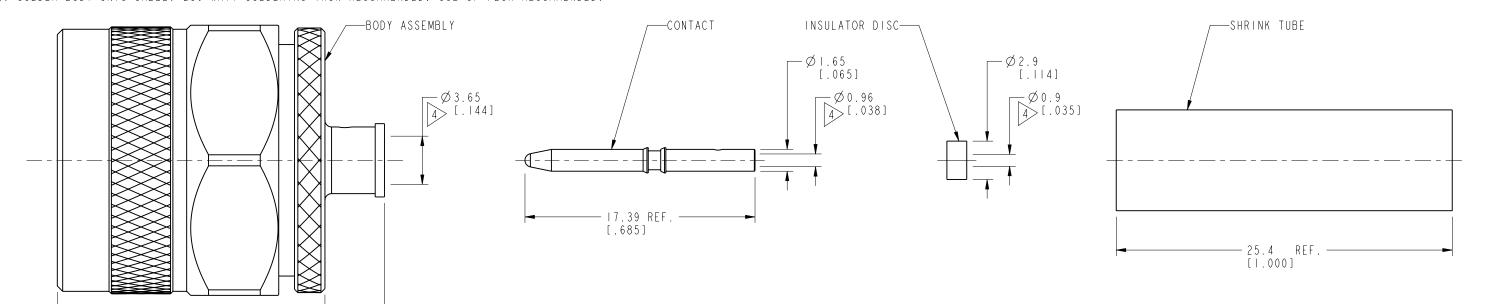

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

6 - 30mm 30 - 120mm ±0.2mm ± 0.3mm $\pm\,$ 0.lmm \pm 0.05mm NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

20.23 REF [.797]

— 24.73 REF. —

[.974]

	MATERIAL	DRAWN	DATE	1
	H SEE NOTES	M.ZHANG	28-Nov-18	
y or is		ENGINEER	DATE	
	REFERENCE	C. VIGORITO	28 - Nov - 18	
	EAR# 8591	APPROVED	DATE	
ıs g	REF:	S.HSIEH	08-Mar-19	5
l	CONFIGURATION LEVEL: In Work	CAD FILE		_
	FINISH			

TITLE			
l 18 GHz TY	PE N	PLUG	
FOR . 141"	SEMI	-RIGID	
- & CONFORMABLE -			
SCALE: 3.5:1.0 S	SHEET 2 0	F 2	U I
DWG SIZE REV		REV	Ш
В		Α	lρ

Am	Amphenol RF				
www.amphenolrf.com					
DRAWING NO. 8	82-6673				
ITEM NO.	82-6673				
PART NO.	82-6673				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

8915-1511-000 89674-0827 6001-7071-019 6002-7051-003 6002-7551-202 6059674-1 619550-1 630059-000 M39030/3-01N M3933/25-36N 6500-7071-046 6769 CX050L2AQ 7002-1542-011 7004-1512-000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1541-010 7101-1571-002 7105-1521-002 7145-1521-002 7203-1571-003 7209-1511-011 7210-1511-015 7210-1511-019 73137-5015 73216-2241 7325-1512-000 73404-2300 7405-1521-005 7405-1521-802 7406-1521-005 8527 8547 FS11V 8808-1511-001 9049-9513-000 9074-9513-000 9101-9573-002 910A205F 9130-9573-002 PL11SC-026 PL375-33 PL40-5 PL71-9 PL74C-221 PL75MC-217 PL803-7 980-8666-005