

DIN 41612 SIGNAL HEADERS & RECEPTACLES

2.54 mm Pitch


OVERVIEW

FCI offers a broad and a complete range of interconnection systems conforming to DIN 41612 and IEC 603-2 specifications. DIN 41612 connector systems are the most popular backplane interconnect systems due to the widespread standard adoption, easy availability, cost-effectiveness and durability.

The product design for Board-to-Board and I/O solutions involve two popular mating combination; Standard Mount and Reverse Mount.

These connectors are available in up to three rows and 96 positions with Solder, Press-fit and Pin-in Paste terminations. FCI offers three standard performance class options as follows: DIN class I (500 operations); DIN class II (400 operations); DIN class III (50 operations).

Primary market segments include Industrial, Telecom and Data.

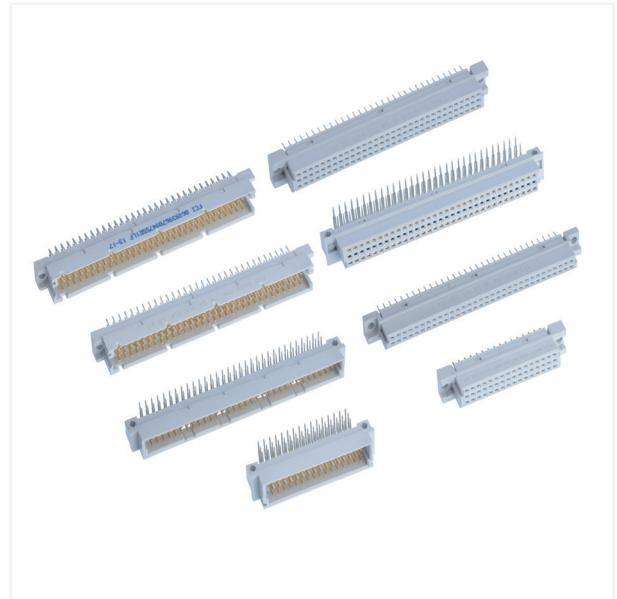

FEATURES

- 2.54mm pitch
- Modular system
- Selective loading pattern for contacts
- FMLB/LMEB contacts
- Wide range of accessories (board-locks, latches, shrouds, hoods, keys)
- Rear plug up variants in press-fit applications

BENEFITS

- Adequate spacing for routing PCB traces
- Standardized and cost-effective solutions
- Improve creepage distance, allow custom loading
- Critical grounding option
- Enhances the connector suitability and flexibility
- Extended mating applications via shrouds on the rear side of the PCB





TECHNICAL INFORMATION

MATERIALS

- Insulator: Polyester Thermoplastic
- Housings can withstand exposure to lead free wave soldering temperature of 260°C to 265°C when used along with high temperature adhesive or protective metallic device for right angle connectors.
- Contact: Copper Alloy (Male & female contact)
- Plating: Lead-free version
- Male & Female contacts (DIN 41612 compliant)
 - Active contact areas selectively plated
 - Gold over Nickel or GXT™ over Nickel on mating surface
 - Tin over Nickel on solder termination

ELECTRICAL PERFORMANCE

- Current Rating at 20°C: 1.5A
- Maximum Current: 2A
- Contact Resistance: $\leq 20\text{m}\Omega$
- Insulation Resistance: $\geq 10^6\text{M}\Omega$
- Test Voltage (rms): 1000V
- Creepage and Clearance Distance: $\geq 1.2\text{mm}$
- Wiping/Plug-in Direction: $\geq 1.8\text{mm}$

MECHANICAL PERFORMANCE

- Mating Insertion Force per Contact: $\leq 0.94\text{N}$
- Mating Extraction Force per Contact: $\geq 0.15\text{N}$
- Contact Retention in Insulator: $\geq 20\text{N}$
- Vibration: $\leq 1\mu\text{s}$
 $\leq 40\text{m}\Omega$
- Shock: $\leq 1\mu\text{s}$
 $\leq 40\text{m}\Omega$

SPECIFICATIONS

- DIN 41612
- IEC 603-2

ENVIRONMENTAL

- Temperature Range: -55°C to $+125^\circ\text{C}$
- Damp Heat
 - Steady state 56 days: Class 1
 - Steady state 21 days: Class 2
 - Not applicable: Class 3

APPROVALS AND CERTIFICATIONS

- UL/CSA in progress

PACKAGING

- Tray
- Tube
- Carton

TARGET MARKET/ APPLICATIONS

- Industrial
 - Medical
 - Lighting
 - Process Control
 - Transportation
 - Instrumentation
 - Vehicle electronics
 - Energy transmission/distribution control
- Telecom
 - Switching/Routing
 - Enterprise
 - Transmission
 - Access – wired/wireless
- Data
 - Servers
 - Personal Computing
 - Peripheral devices
- Consumer
 - Home entertainment
 - White goods
 - Phones

PART NUMBERS

Style	Connector	Configuration	Rows Loaded	Termination	Part number
C	Right Angle Header	2 row / 64 pos.	a & c	Solder-to-board	860946471137*5ELF
				Press-fit	860946471947*5E1LF
		3 row / 96 pos.	a, b, c	Solder-to-board	860939671137*5ELF
				Press-fit	860939671947*5E1LF
	Straight Receptacle	2 row / 64 pos.	a & c	Solder-to-board	860946481147*5V1LF
				Press-fit	860946481947*5E3LF
		3 row / 96 pos.	a, b, c	Solder-to-board	860939681147*5V1LF
				Press-fit	860939681947*5E3LF
C/2	Right Angle Header	2 row / 32 pos.	a & c	Solder-to-board	860943273137*5ELF
		3 row / 48 pos.	a, b, c		860934873137*5ELF
	Straight Receptacle	2 row / 32 pos.	a & c		860943283147*5V1LF
		3 row / 48 pos.	a, b, c	Solder-to-board	860934883147*5V1LF
				Press-fit	860934883947*5E3LF
		B	Right Angle Header	1 row / 32 pos.	a only
2 row / 64 pos.	a & b			860926451137*5ELF	
Straight Receptacle	1 row / 32 pos.		a only	860913261147*5V1LF	
	2 row / 64 pos.		a & b	860926461147*5V1LF	
B/2	Right Angle Header	2 row / 32 pos.	a & b	Solder-to-board	860923253137*5ELF
	Straight Receptacle				860923263147*5E1LF
R	Straight Header	2 row / 64 pos.	a & c	Solder-to-board	860946478147*5ELF
				Press-fit	860946478947*5E1LF
		3 row / 96 pos.	a, b, c	Solder-to-board	860939678147*5ELF
				Press-fit	860939678947*5E1LF
	Right Angle Receptacle	2 row / 64 pos.	a & c	Solder-to-board	860946488137*5V1LF
				Press-fit	860946488947*5E3LF
		3 row / 96 pos.	a, b, c	Solder-to-board	860939688137*5V1LF
				Press-fit	860939688947*5E3LF
R/2	Straight Header	2 row / 32 pos.	a & c	Solder-to-board	860943276147*5ELF
		3 row / 48 pos.	a, b, c	Solder-to-board	860934876147*5ELF
				Press-fit	860934876947*5E1LF
	Right Angle Receptacle	2 row / 32 pos.	a & c	Solder-to-board	860943286137*5E1LF
		3 row / 48 pos.	a, b, c		860934886137*5E1LF
Q	Straight Header	2 row / 64 pos.	a & b	Solder-to-board	860926458147*5ELF

Notes

Asterisk (*) in part number denotes Performance class: PN Code 6,5,4 for Class 1, 2 & 3 respectively. Custom loading and other options available on request.

BPLDINSIGNAL1215EA4

Disclaimer

Please note that the above information is subject to change without notice.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DIN 41612 Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[004.767](#) [608489050008049](#) [691327-1](#) [74670-0732](#) [74680-0340](#) [75880-0015](#) [76453-0014](#) [86093159ALF](#) [9732967801](#) [QLC260R](#)
[120X10019X](#) [120X10089X](#) [122A10249X](#) [122A10669X](#) [122A11089X](#) [122A13089X](#) [122A10089X](#) [122A10129X](#) [122A10349X](#)
[122A13359X](#) [1377391-4](#) [DIN-048CPC-SR1-MH](#) [1393583-2](#) [1393726-7](#) [140X10129X](#) [143-1913-000](#) [143-1908-000](#) [1484472-1](#) [2110070-1](#)
[2110070-2](#) [CBC20T00-008FDS5-0-1-002VR](#) [172699-5036](#) [2-1393557-4](#) [2-1437084-2](#) [CTJ720E01B-6141](#) [394506](#) [419-2080-402](#)
[V42254B2202C968](#) [419-2086-201](#) [419-2087-002](#) [448657-1](#) [448847-3](#) [5-1393755-9](#) [02990000004](#) [054302](#) [043556](#) [09062483201750](#)
[0850033067](#) [09031646555](#) [09061486901840](#)