

# METRAL® POWER, HIGH POWER AND COAX CONNECTORS


## OVERVIEW

Metral® power, high power and coax connectors are standalone modules, end-to-end stackable with Metral® signal modules. The connectors are designed in accordance with IEC 61076-4-104 and Telcordia GR-1217-CORE.

Metral® power, high power and coax connectors support power solution with current rating of 3 to 40A for each pin. They are available in 4 and 5 row versions.

The power connector range featuring blade contacts is offered in vertical headers and right angle receptacles, right angle headers and vertical receptacles. The coax range includes single and multi pin versions.

Metral® backplane connectors meet Futurebus+ standards to support applications in data, industrial and instrumentation, medical and telecom markets.

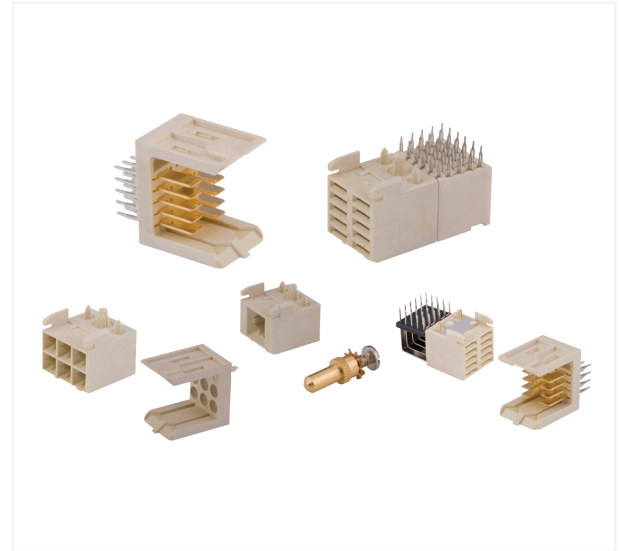

## FEATURES

- Modular and scalable
- Varying pin length enables first-mate, last-break capability
- Dual beam contact design for receptacles blade
- Current rating of 3 to 40A
- Power connector range with blade contacts uses same PCB footprint as signal modules
- Press-fit, Solder-to-Board and Pin-in-Paste terminations available
- Power and coax couplers are available
- Mini coax connectors are available

## BENEFITS

- End-to-end stackable with other power, signal and coax modules
- Allows sequential connection of pins for design flexibility and offers protection
- Provides electrical reliability and withstands vibration
- Caters to different application requirement
- Interchangeable solution offers design flexibility
- Caters to different application requirement
- Suitable for Rear Plug-Up (RPU) application
- Compact size and small footprint





## TECHNICAL INFORMATION

### MATERIALS

- Housing: High temperature thermoplastic; UL 94V-0
- Contact: Copper Alloy
- Plating: Performance-based plating

### ELECTRICAL PERFORMANCE

- Power
  - Dielectric Withstanding Voltage : 1000V rms
  - Insulation Resistance: 5000MΩ min
  - Current Rating: 3-40A
- Coax
  - Electrical Impedance: 50Ω and 75Ω
  - Operating Voltage: 250V
  - Insulation Resistance: 3000MΩ min

### ENVIRONMENTAL

- Power
  - Operating Temperature: -55°C to +125°C
- Coax
  - Operating Temperature: -65°C to +165°C

### SPECIFICATIONS

- Product Specifications: GS-12-180, GS-12-453
- Application Specifications: BUS-20-075, TA-941

## PART NUMBERS

### METRAL® STANDARD POWER (3A)

Right Angle Receptacle (RAR)		Termination	Vertical Header (VH)	
Row			Row	
4	5		4	5
88949-102LF	89096-102LF	Press-fit	70236-101LF	89099-111LF
89039-101LF	85876-102LF	Solder-to-Board		
72651-101LF	63793-101LF	Pin-in-Paste		

### MECHANICAL PERFORMANCE

- Power
  - Mating Force : 1.5 N max. per pin
  - Unmating Force : 0.30 N min. per pin
- Coax
  - Mating Force: 0.9N
  - Unmating Force: 0.9N

### APPROVALS AND CERTIFICATIONS

- IEC 61076-4-104
- Telcordia GR-1217-CORE

### PACKAGING

- Tube for Press-fit and Solder to Board Terminations
- Tape and Reel for Pin-in-Paste Termination

### TARGET MARKETS/APPLICATIONS

- Data
- Industrial & Instrumentation
- Medical
- Telecom

### METRAL® HIGH POWER (40A)

Description	Part Numbers
Right angle receptacle housing	89092-101LF
Receptacle contact	85995-103LF
Wide body header housing	88911-101LF
Contact screw PCB	91570-001LF

### METRAL® COAX

Description	Part Numbers
Right angle receptacle housing	70244-102LF
Receptacle contact STB	70239-002LF
Wide body header housing	88913-101LF
Contact STB	88980-002LF

BPLPWRCOAX0615EA4

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [High Speed/Modular Connectors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[650827-1](#) [74040-1346](#) [1410191-1](#) [1410337-1](#) [1410368-3](#) [1410964-2](#) [1410326-3](#) [1410367-3](#) [1410971-4](#) [1467833-1](#) [2000877-1](#) [2000878-1](#)  
[2041314-1](#) [2065387-1](#) [2187307-1](#) [163P](#) [1934290-1](#) [2000875-1](#) [2065917-1](#) [2102736-2](#) [FSR-40](#) [2169868-2](#) [22354-8](#) [437-5040-000](#) [5-](#)  
[1393565-0](#) [039-0246-000](#) [0740618502](#) [0761601016](#) [0784461022](#) [10123159-12ELF](#) [030-2415-003/100 PK](#) [030-7380-004](#) [030-2494-001](#)  
[532939-1](#) [5532901-3](#) [3-1469268-7](#) [74748-102LF](#) [73670-0247](#) [10041743-101LF](#) [10066670-100002LF](#) [1-533915-1](#) [249-4515-000](#) [7-1469373-](#)  
[3](#) [DL2-2J/S](#) [2000713-8](#) [2000713-7](#) [3011-21](#) [757105208](#) [EBTF-4-10-2.0-S-RA-1](#) [430305-001](#)