

METRAL® VERTICAL HEADER AND RIGHT ANGLE RECEPTACLE


OVERVIEW

Metral® product family offers the widest range of backplane connector solutions which includes vertical header and right angle receptacle series. The connectors are designed in accordance with IEC 61076-4-104 and Telcordia GR-1217-CORE.

Metral® vertical headers and right angle receptacles offer high contact density of 250 contacts per 100mm connector length, and a contact pitch of 2mm. They are available in 4 and 5 row versions.

Metral® vertical headers can be used with vertical receptacles for mezzanine application.

Metral® backplane connectors meet Futurebus+ standards to support applications in data, industrial and instrumentation, medical, and telecom markets.

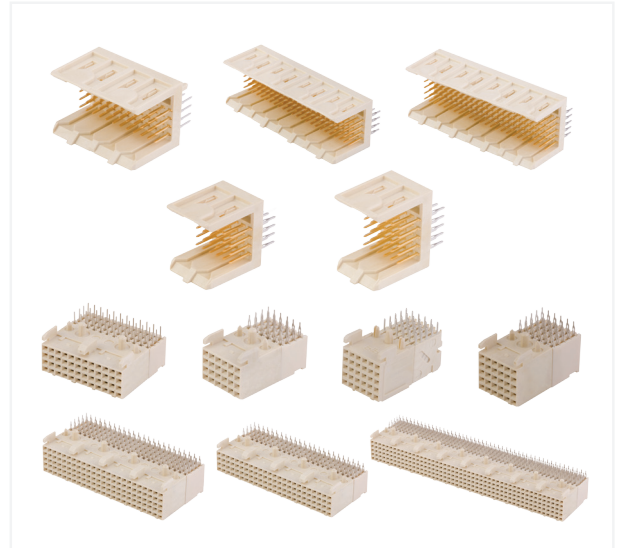

FEATURES

- Modular and scalable, available in 1, 2, 4 and 8 modules
- 250 contacts per 100mm connector length
- Press-fit, Solder-to-Board and Pin-in-Paste terminations
- Varying pin length enables first-mate, last-break capability
- 4 and 5 row versions available
- Different length contacts at any position for Headers
- Dual beam contact design for receptacles
- Locating pegs option available
- Stackable connector to Metral® high speed range

BENEFITS

- Flexible modular length without any loss of contact position
- High signal density
- Caters to different application requirement
- Allows sequential connection of pins for design flexibility and offers protection
- Caters to different connector sizes
- Custom loading
- Provides electrical reliability and withstands vibration
- Enables accurate positioning of connector on PCB, holds connector in place
- Allows flexibility of low and high speed signals





TECHNICAL INFORMATION

MATERIALS

- Housing : High temperature thermoplastic; UL 94V-0
- Contact: Copper Alloy
- Plating: Performance-based plating

ELECTRICAL PERFORMANCE

- Dielectric Withstanding Voltage: 1000Vrms
- Insulation Resistance: 5000MΩ min.
- Current Rating: 1A (all contacts powered)

ENVIRONMENTAL

- Operating Temperature: -55°C to +125°C

SPECIFICATIONS

- Product Specifications: GS-12-180, 453
- Application Specifications: BUS-20-073, 061

MECHANICAL PERFORMANCE

- Mating Force: 0.45N max. per pin
- Unmating Force: 0.15 N min. per pin

APPROVALS AND CERTIFICATIONS

- IEC 61076-4-104
- GR-1217-CORE

PACKAGING

- Tube for Press-fit and Solder-to-Board terminations
- Tape and Reel for Pin-in-Paste termination

TARGET MARKETS/APPLICATIONS

- Data
- Industrial & Instrumentation
- Medical
- Telecom

PART NUMBERS

Right Angle Receptacle (RAR)		Module	Termination	Vertical Header (VH)	
Row				Row	
4	5			4	5
88945-102LF	89047-102LF	1	Press-fit	70232-116LF	89006-116LF
88946-102LF	89093-102LF	2	Press-fit	70233-116LF	89007-116LF
88947-102LF	89094-102LF	4	Press-fit	70234-116LF	89008-116LF
88948-102LF	89095-102LF	8	Press-fit	70235-116LF	89009-116LF
89035-102LF	85863-102LF	1	Solder-to-Board	88951-101LF	74741-101LF
89036-102LF	85864-102LF	2	Solder-to-Board	88952-101LF	74742-101LF
89037-102LF	85865-102LF	4	Solder-to-Board	88953-101LF	74743-101LF
89038-102LF	85866-102LF	8	Solder-to-Board	88954-101LF	74744-131LF
-	10126372-102LF	1	Pin-in-Paste	-	-

BPLMETRALVHRRAR0615EA4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed/Modular Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[650827-1](#) [74040-1346](#) [1410191-1](#) [1410337-1](#) [1410368-3](#) [1410964-2](#) [1410326-3](#) [1410367-3](#) [1410971-4](#) [1467833-1](#) [2000877-1](#) [2000878-1](#)
[2041314-1](#) [2065387-1](#) [2187307-1](#) [163P](#) [1934290-1](#) [2000875-1](#) [2065917-1](#) [2102736-2](#) [FSR-40](#) [2169868-2](#) [22354-8](#) [437-5040-000](#) [5-](#)
[1393565-0](#) [039-0246-000](#) [0740618502](#) [0761601016](#) [0784461022](#) [10123159-12ELF](#) [030-2415-003/100 PK](#) [030-7380-004](#) [030-2494-001](#)
[532939-1](#) [5532901-3](#) [3-1469268-7](#) [74748-102LF](#) [73670-0247](#) [10041743-101LF](#) [10066670-100002LF](#) [1-533915-1](#) [249-4515-000](#) [7-1469373-](#)
[3](#) [DL2-2J/S](#) [2000713-8](#) [2000713-7](#) [3011-21](#) [757105208](#) [EBTF-4-10-2.0-S-RA-1](#) [430305-001](#)