


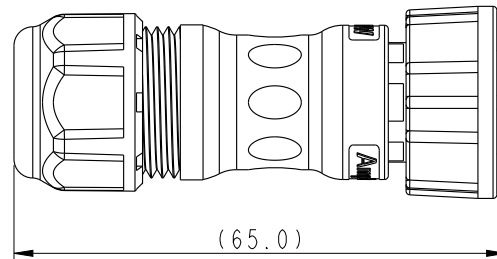
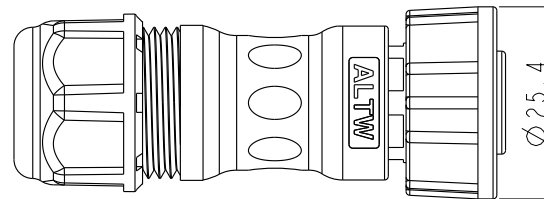


7	8
REV.	DESCRIPTION

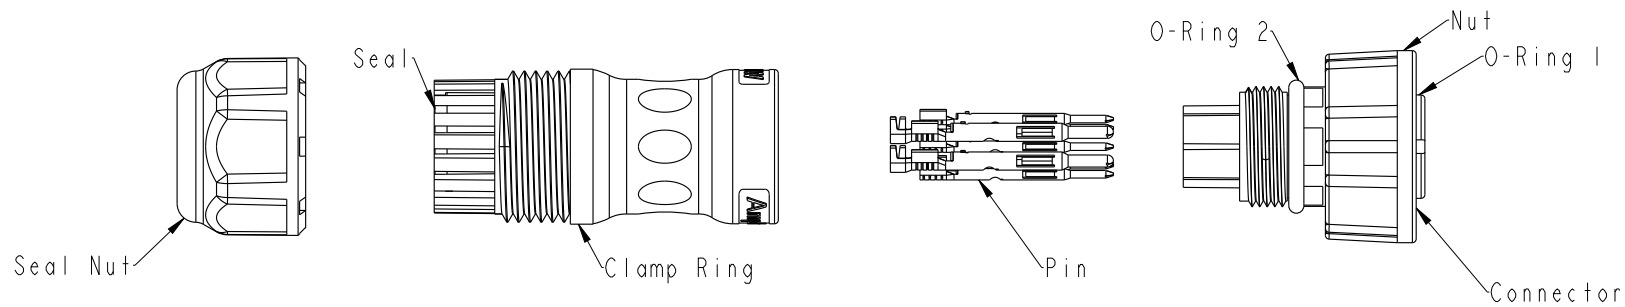

Pin Assignments
Front View

UNIT:mm		
TOLERANCE		
±0.5 mm		

TITLE Circular C-Size Field Installable Cable Type F Conn			
SCALE 8:5	SIZE A4	SHEET 1 OF 2	
REV. A	WC-REV. A.3	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO ACBD-08BFMC-SL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15

DATE	2018-12-15
DATE	2018-12-15
DATE	2018-12-15

DATE	2018-12-15
DATE	2018-12-15
DATE	2018-12-15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

Ordering Information:

ACBD-08BFMC-SL7XP0

Material Specification:
 * Connector: Nylon+GF, Black.
 * Pins: Copper Alloy, Gold Plated.
 * Seal & O-Ring: Silicone, Gray.
 * UL Rated: UL 94V-0, fl.
 * RoHS Compliant.

Electrical Specification:
 * Contact Resistance: 10mΩ Max.
 * Insulation Resistance: 100MΩ Min.
 * Dielectric Withstand Voltage: 1,600 Vac.

Mechanical Specification:
 * Durability: 1000 Cycles.
 * Tensile strength: 10 kgf.
 * Wire Conductor:
 5A: 22AWG~20AWG
 10A: 18AWG~16AWG
 * Wire Insulation OD:
 5A: 1.9mm Max.
 10A: 2.7mm Max.
 * Torque Force for Clamp Ring: 6~8 kgf-cm
 * Torque Force for Seal Nut: 6~8 kgf-cm

Environmental Specification:
 * Waterproof Rating: IP67(Mated)
 * Temperature Range: -40°C to 105°C.
 * Salt Spray: Mated, 1000 Hours.
 * Safety Compliance: UL 1977.

A: With Red&Yellow&Blue Color Seal
 S: With Red Color Seal, Cable OD 6.0~8.0mm.
 M: With Yellow Color Seal, Cable OD 8.0~10.0mm.
 L: With Blue Color Seal, Cable OD 10.0~12.0mm.

UNIT:mm			TITLE Circular C-Size Field Installable Cable Type F Conn
TOLERANCE ±0.5 mm			SCALE 8:5 SIZE A4 SHEET 2 OF 2
REV. A	WC-REV. A.3	QC: Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Peng	DATE 2018-12-15
DWG NO ACBD-08BFMC-SL7XP0	CHECKED BY Mafei	DATE 2018-12-15
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2018-12-15

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#) [6282-2SG-315](#) [67-02E12-60PX](#) [680-SMG](#) [CXS3102A181S](#) [7251-5SG-300](#) [7282-3PG-300-CH3](#) [75-190218-10P](#) [75-190611-03S](#) [75-474014-05S](#) [75-474118-10P](#) [75-474211-03P](#) [75-474218-19S](#) [75-474618-04P](#) [75-474618-04S](#) [75-474620-07P](#) [80-190222-18P](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-516](#) [8280-7PG-519](#) [862256-1](#) [866857-1](#) [867865-1](#) [PT08P-14-19S](#) [PT08P-14-5S](#) [PT08P-8-3S](#) [PTSF06SE-14-12S](#) [120-1833-000](#) [QCM019PC2DC012B](#) [121583-0217](#) [121667-0020](#) [RD10A16-19-P6CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240347](#) [1301790476](#) [1301240268](#) [1301240275](#) [1301860183](#) [1301860906](#) [1302261559](#) [DCU-08BFEA-LL7001](#) [RM15WTP-CP\(5\)\(71\)](#) [14381-10SG-300](#) [14482](#)