


Amphenol

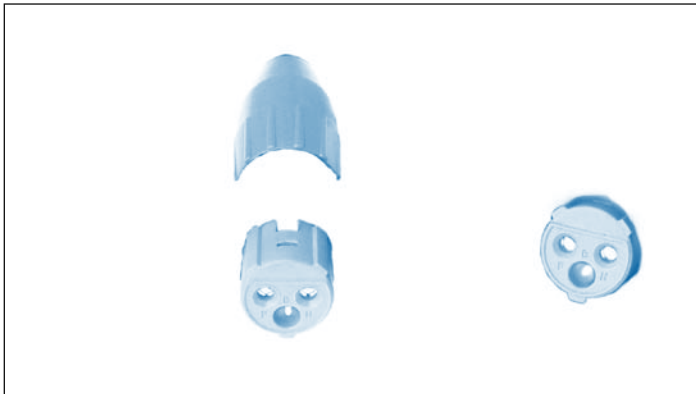

This range has been specially designed for amplifier to loudspeaker connections. The polarity configuration being POSITIVE, DRAIN, NEGATIVE. Visual color coding insert with matching boot/backshell (blue or white) can be used for either channel selection and/or cable identification purposes. AC-PDN 11 & 31 are recommended for live source applications (amplifiers). AC-PDN 12 & 34 are recommended for load applications (speakers).

Features:

- Solder Bucket connections.
- Thermoplastic Shells
- Designed for 25 Amps RMS usage.
- “Jaws” Cable Retention System, Max. Cable O.D. 8mm (0.351”)
- Precision machined contacts accept up to 4mm² (12AWG) conductors.
- Quick and easy assembly – by hand or portable termination tool (Part Number T2860.)



Options: White or Blue housing and insert colour. Std. Jaws cable clamp.
Specifications: [Page 72](#) [Panel Cutouts:](#) [Page 33](#)

PRODUCT - FIGURE	DRAWING Dimensions in mm (inches)	DESCRIPTION	VARIATIONS	PART NUMBER
		PDN male, Cable connector, Positive, Negative, Drain contacts, Thermoplastic shell, Large Jaws cable clamp	Blue housing White housing	AC-PDN-12-BLU AC-PDN-12-WHT
		PDN female, Cable connector, Positive, Negative, Drain contacts, Thermoplastic shell, Large Jaws cable clamp	Blue housing White housing	AC-PDN-11-BLU AC-PDN-11-WHT
		PDN male, Chassis mount, Positive, Negative, Drain contacts, Thermoplastic shell	Blue housing White housing	AC-PDN-34-BLU AC-PDN-34-WHT
		PDN female, Chassis mount, Positive, Negative, Drain contacts, Thermoplastic shell	Blue housing White housing	AC-PDN-31-BLU AC-PDN-31-WHT



Amphenol

STANDARD DATA AC-PDN CONNECTORS

		VALUE
GENERAL CHARACTERISTICS	Number of contacts	2+ Drain
	PDN Contact Arrangement (Front View of Socket & Pin Insert)	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Socket</p> </div> <div style="text-align: center;">  <p>Pin</p> </div> </div>
	Termination	Solder
	Max. Wire Gauge - Stranded wire:	
	Power	12AWG
	Drain	19AWG
Flammability rating of plastics	UL94V-0	
Environmental	Complies with RoHS Directive 2002/95/EC	
ELECTRICAL CHARACTERISTICS	Service Voltage RMS	133V ¹⁾ NOTE: Do not use this series of connectors for mains applications. The drain contact dimensions make it unsuitable for use as an earth contact.
	Test Voltage AC RMS	1400V
	Current carrying capacity:	7.5A
	Typical Contact Resistance	≤3mΩ
	Insulation Resistance	≥1GΩ
CLIMATIC CHARACTERISTICS	Protection Class	IP40
	Operating Temperature	-25 °C to +75 °C (-13°F to +167°F)
MECHANICAL CHARACTERISTICS	Insertion and Withdrawal Force	≥10N - ≤30N
	Weight - Thermoplastic ²⁾	19g (0.041lb)
	Typical Cable Retention Force	22Kg to 44Kg (50lb to 100lb)
	Cable O.D. Range - JAWS Clamp	6.5 mm to 8mm (0.255" to 0.314") - Standard 3 mm to 6.5 mm (0.118" to 0.255") - Optional - Contact us
	Mechanical Operations	1000 mating cycles
MATERIALS	Connector Shell	Thermoplastic, UL94V-0 Modified PPE Resin
	Shell Colour	Black
	Insulators	UL94V-0 PBT Resin or Modified PPE Resin
	Contact	Brass
	Contact Plating	Silver or Gold (optional)

¹⁾ Not suitable for domestic applications above 50V

²⁾ Approximate weight only, does not include packaging. Please contact us for exact weight for shipping purposes.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Loudspeaker Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[NL4MP-B](#) [NSB1C-8/0](#) [NL4MP-UC-1](#) [NLT4FD-V-BAG](#) [HPCP410F1](#) [SP-4-MDQ](#) [HFRP-01](#) [EP-3-14](#) [EP-4-11P](#) [EP-4-11PB](#) [EP-4-12](#) [EP-5-13PB](#) [EP-6-11P](#) [EP-6-11PB](#) [EP-6-12](#) [EP-6-12B](#) [EP-6-13PB](#) [EP-8-12](#) [EP-8-12B](#) [SC-M2-20](#) [NA4MP-F](#) [CC-212](#) [FM1250](#) [FM1255](#) [FM1275](#) [FM1285](#) [SP-2-MDH](#) [SP-2-MDV](#) [SP-4-MDHT](#) [SP-4-MDHT-8](#) [SP-4-MDV-2](#) [NL4FRX](#) [NL4MMX](#) [NL4MPR](#) [NL4MP-ST](#) [NL8FC](#) [NLT4FP-BAG](#) [NLT8MP](#) [NLT8MP-BAG](#) [SP-4-MDV](#) [EP-8-14B](#) [EP-8-13P](#) [EP-8-11P](#) [EP-6-14B](#) [EP-6-13P](#) [EP-5-14](#) [EP-4-13P](#) [NL2MD-V](#) [NL4FX-5](#)
[NL4MD-H](#)