

## AHVB Connector Series

Amphenol Industrial has taken the Brush terminal series used in harsh environment military and aerospace applications for over 30 years and developed it for the Heavy Equipment, Mining, Medical, Rail Mass Transit and other Industrial markets. These revolutionary terminals have multiple strands of high tensile strength wire bundled together on each side of the contact that are then hooded for protection.

Amphenol's High Vibration Brush (AHVB) terminals are "problem solvers" in all markets because they are made for high vibration, low mating forces, zero fretting and high mating cycles up to 100k. This terminal series is superior for all signal applications where environmental performance is critical to function, because it has 14 to 70 points of contact when mated making it unmatched in the industry. AHVB comes in a compact package size with a 22 AWG contact at the terminal interface, but can also accommodate up to a size 16 gauge cable or have a PCB tail.


AHVB passes vibrations of 53.8 grms at 8 hours per axis and 2000 Hz, 150°C, and has interface seals that make them impervious to chemicals and diesel fluids. These terminals can be used as in-lines or designed into devices, modules and sensors where vibration and fretting can be a major cause of failures and warranty issues.

### Features:

- Zero fretting
- High vibration (53.8 grms)
- Low insertion force (1.0 oz typical)
- High mating cycles - up to 100k
- Small package size - size 22
- Accommodates up to size 16 gauge cable or PCB tail
- Signal contacts rated up to 5 amps continuous
- Less mechanical assist required at high I/O counts
- IP67 mated and backshells or heat shrink can be added for IP69k
- Designed to meet SAE J2030
- 14 to 70 points of contact when mated
- Withstand temperatures to 150°C
- Interface seals impervious to chemicals/caustic fluids



Specification:	
Current Rating	5 Amps (1 Amp Hot Swap)
Contact Size	22
Allowable Wire Size	16-18 AWG
Operating Temperature	-40°C to 150°C
Contact Retention	110N
Mating Cycles	up to 100k
Vibration	53.79 grms
Insulation Resistance	50 GΩ (at 25 °C)
Dielectric Withstanding Voltage	1960V AC (RMS)
Operating Voltage	1000 VDC
Moisture Resistance	IP67 (mated)
Contact Plating	Gold
Crimp tooling	Standard 38999 tools
Removal tool	PN 10-708386-000

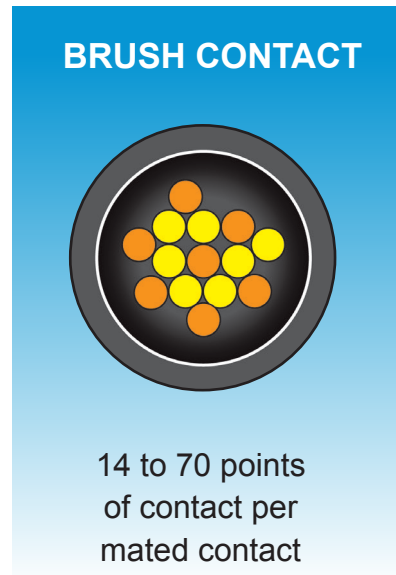

## AHVB How to Order

1	2		3		4	5
AHVB	1		P		A	(XX)
Series	Number of Terminals		Housing		Cable Range	Special Additions
AHVB	4	4-Way Connector Only	P	Plug	A 16-18 AWG	
			R	Receptacle		
			<b>Terminal</b>			
	1	Terminal Only	F	Female Socket		
			M	Male Pin		
			<b>Kit</b>			
	4	4-Way Set	KT	Kit Packaging (Plug and receptacle with terminals and removal tool)		

**Note:** Housing Plug must use the Male Pin terminal and Housing Receptacle must use Female socket.

## 4-way Kits are available today **AHVB-4KT-A**

### Each Kit Includes:

- 6 pins for 16-18 gauge cable
- 6 sockets for 16-18 gauge cable
- One 4-way plug assembly
- One 4-way receptacle assembly
- One removal tool
- Two pieces of Amphenol's HST heat shrink tubing

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind, expressed or implied. Statements of suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

For further information on your individual application requirements, contact: Amphenol Corporation

North America:  
Amphenol Industrial Operations  
180 N. Freepoint Drive, Plant 4  
Nogales, AZ 85621  
Tel: (888) 364-9011  
Fax: (520) 285-5134

Europe:  
Amphenol Industrial Operations Europe  
Via Barbaiana 5  
1-20020 Lainate (MI) Italy  
Tel: +39 02 93254.204  
Fax: +39 02 93254.444

Middle East:  
Amphenol Middle East Enterprises FZE  
Office C-37 PO Box 21107  
Ajman Free Zone, UAE  
Tel: +9 716-7422494  
Fax: +9 716-7422941

Asia:  
Amphenol Technology (Zhuhai) Co., Ltd.  
No. 63 Xin Han Road, San Zao Town  
Jin Wan District, Zhuhai City, China 519040  
Tel: +86 756-3989760  
Fax: +86 756-3989768

Email: tech@amphenol-aio.com

Email: info@amphenol-aio.com

Email: jhussain@amphenol-industrial.com

Email: enquiry@amphenol-aio.com

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[5M2530B10P](#) [600259N006](#) [600273N007](#) [6134-336-13149](#) [6134-337-11149](#) [6134-337-2390](#) [6134-341-17149](#) [6280-4SG-516](#) [6280-7SG-3DC](#)  
[6290](#) [6291A](#) [66200A-10](#) [680-SMG](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [7251-6SG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [75-](#)  
[474014-05S](#) [75-474618-01S](#) [75-474618-04P](#) [75-474618-04S](#) [799539-000](#) [MI8-SE](#) [805-005-07NF11-19PC](#) [805-005-07NF15-7PA](#) [8280-4PG-](#)  
[516](#) [8280-7PG-519](#) [8282-5PG-519](#) [836783-1](#) [MP-4102-25P-C](#) [862256-1](#) [864019-2](#) [866857-1](#) [867865-1](#) [PT01SP-14-18P](#) [PT08P-14-5S](#)  
[PTSF06SE-14-12S](#) [120-1833-000](#) [QCM019PC2DC012B](#) [1-2069279-1](#) [121583-0217](#) [121667-0020](#) [129591AU](#) [1000B BULK](#) [RD10A16-19-](#)  
[P6CS051/1](#) [RD10A20-31-P8CS051/1](#) [RD16A14-12-S6CS051/2](#) [1301240290](#) [1301240347](#)