





RoHS Compliant




Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A0	—	01/09'22	The first release	PansLee
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>				

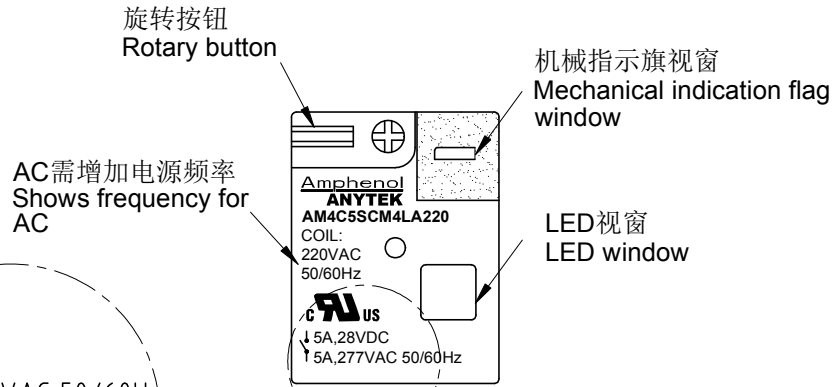

A(当负载为10A 印字图)



B(当负载为10A 印字图)

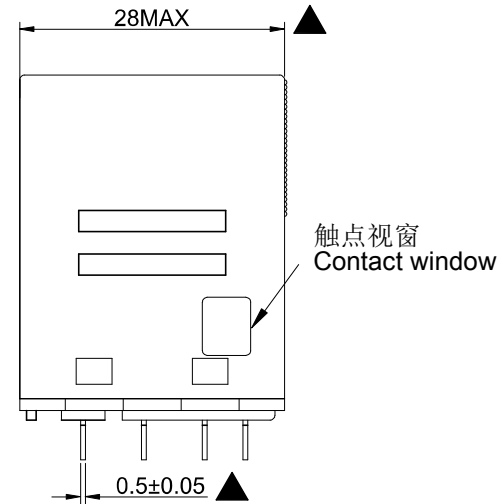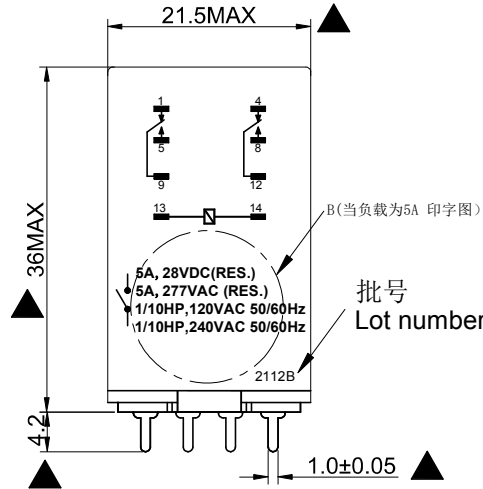

<b>Amphenol ANYTEK</b>				<b>CUSTOMER COPY</b>	
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD					
TITLE		AM-4PDT/ROTARY BUTTON/LED/INDICATOR FLAG INDUSTRIAL RELAY			
PART NO.		AM4CXXPCM4LXXXX00G		DWG NO. 8AM4C-0014	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		PansLee 2022.1.09	PansLee 2022.1.09		
				UNIT: mm	X.X ±0.10
				SCALE: NONE	X.XX ±0.05
				SHEET: 01/02	X.XXX ±0.005
				REV.: A0	X° ±1°

RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
A0	—	01/09'22	The first release	PansLee
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!				

线圈参数,在23 °C环境下 Coil parameters (At 23 °C)

线圈规格代码 Coil voltage code	线圈额定电压 Rated coil voltage	线圈电阻 Coil resistance (Ω) ±10%	线圈功率 Power Consumption	动作电压 Operate voltage	释放电压 Release voltage	线圈最大电压 Max. allowable voltage
D6	6 VDC	40	0.89~1.1 W	75% Maximum	10% Minimum	110% Maximum
D12	12 VDC	160				
D24	24 VDC	650				
D48	48 VDC	2600				
D110	110 VDC	11000				
A6	6 VAC	9.5	1.2 VA	80% Maximum	15% Minimum	110% Maximum
A12	12 VAC	46				
A24	24 VAC	180				
A48	48 VAC	770				
A110	110 VAC	3830				
A120	120 VAC	4430				
A220/230	220/230 VAC	15000				
A240	240 VAC	15700				

注Annotation: 交流线圈电源频率50~60Hz. The frequency of AC Coil is 50 ~ 60 Hz.

触点参数Contact parameters

- 触点形式Contact Form: 4PDT
- 接触电阻Contact Resistance: 100m Ω Max. At 6VDC,100mA
- 触点材质Contact Material: AgNi
- 阻性负载Resistive load : 5A@28VDC/277VAC(10A@28VDC/240VAC) ,50~60Hz
- 马达负载Motor load: 1/10Hp@120VAC,1/10Hp@240VAC ,50~60Hz
- 电气寿命Electrical Life: 10万操作次数, 在额定负载情况下, 100,000 operations at Rated Resistive Load.
- 机械寿命Mechanical Life: 1000万操作次数, 在无负载情况下, 10,000,000 operations at No Load condition.

综合性能参数Comprehensive performance parameter

- 绝缘电阻Insulation resistance:500M Ω Min. at 500VDC
- 介质耐压(初始) Dielectric strength (initial) : 同极触点间1000VAC,1Min;  
异极触点间1500VAC,1Min;  
线圈触点间1500VAC,1Min  
Between open contact 1000VAC,1Min;  
Between different pole 1500VAC,1Min;  
Between contact and coil 1500VAC,1Min


- 动作时间Operate time: 20ms Max.
- 释放时间Release time: 20ms Max.

使用环境Service environment

- 使用环境温度Ambient temperature: -25-+50 °C
- 湿度Ambient humidity: 5%-85%
- 抗冲击Shock resistance : 破坏性 Destruction: 1,000 m/s<sup>2</sup>  
故障 Malfunction: 200 m/s<sup>2</sup>


- 耐振动Vibration resistance: 破坏性 Destruction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude)  
故障 Malfunction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude)


其它Other

- 基座材质The base material:UL94V-0, 酚醛塑料 Phenolic molding compound, 耐高温temperature resistance: 155 °C
- 防尘外壳Dust-proof cover: 透明PC Transparent PC
- 重量Weight: About 32g
- 安规认证Safety Approval: cULUS UL证书号码 File Number: E521873
- 重点尺寸Critical dimension: 

继电器规格号示例Part Number Description:

AM 4C XX P C M 4 L XXXX 00G

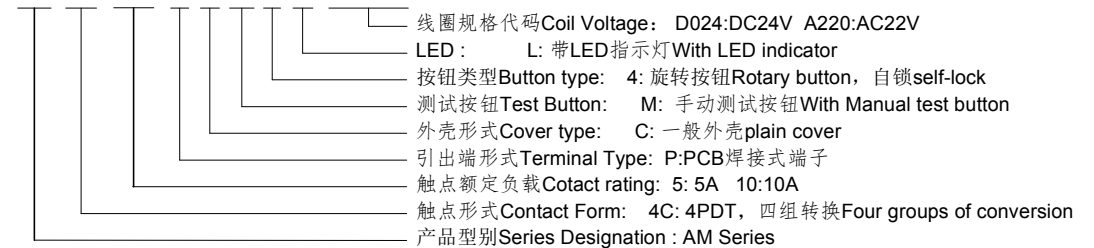

<b>Amphenol ANYTEK</b>				<b>CUSTOMER COPY</b>		
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD						
TITLE	AM-4PDT/ROTARY BUTTON/LED/INDICATOR FLAG INDUSTRIAL RELAY					
PART NO.	AM4CXXPCM4LXXXX00G			DWG NO.	8AM4C-0014	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
		PansLee 2022.1.09	PansLee 2022.1.09		UNIT: mm	X.X ±0.10
					SCALE: NONE	X.XX ±0.05
					SHEET: 02/02	REV.: A0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-4A-02](#) [EV250-6A-01](#) [FCA-325-159](#) [FCA-410-138](#) [8-1618273-6](#) [9-1618397-7](#)  
[GCA63A600VAC60HZ](#) [1-1833005-4](#) [H-16/S1](#) [H-8C](#) [H-8/S68](#) [ACC530U20](#) [RF303ZM4-12](#) [DH18DA](#) [AR4-15F13-C01](#) [AR7-41F11](#)  
[ATL68011](#) [EB3L-S10SAN](#) [AVR907](#) [B329](#) [B490A](#) [1617020-1](#) [1618095-3](#) [1618104-9](#) [1618279-1](#) [BHR124Y](#) [N417](#) [2071229-4](#) [2-1617748-6](#)  
[2-1618396-6](#) [2-1618398-1](#) [JMAPD-5XL](#) [PBE-120/208-ASE](#) [JMGACD-5M](#) [JMGSCD-5L](#) [PBO-40A3040](#) [KA-3C-12A](#) [RT334012WG](#)  
[SF5201F02](#) [301-17SX](#) [SL6H3-26.5VDC](#) [1618105-2](#) [1618112-6](#) [1618276-6](#) [A837D](#) [A862B1](#) [ACC530U10](#)