

	REVISIONS							
REV	ECO	DESCRIPTION	DATE	BY	APPR			
A3	-	RELEASE NEW DWG FORMAT	11DEC13	DRP				
A4	C0540S	UPDATE DIMENSIONS	05JUL16	JONY	TOMMY			
A5	-	ADD COLOR OPTION	23NOV20	LOUIE	TOMMY			


TITLE: PLUG,4 SOCKET,AT,STRAIN RELIEF,REDUCED DIA WIRE SEAL


DWG NO:

AT06-4S-SR02XXX

გ

ΞΞ

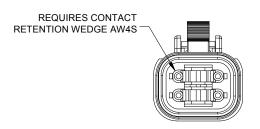



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

HOUSING: THERMOPLASTIC SEAL: SILICONE RUBBER


2. MODIFICATIONS: STRAIN RELIEF END CAP; REDUCED DIA. WIRE SEAL


- 3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP68(1M OF WATER FOR A PERIOD OF 24 HOURS, MATED CONDITION)
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
- 4. MATING PART: AT04-4P* RECEPTACLE (* = MODIFICATIONS AND COLORS)

IP69K(MATED CONDITION)


5. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.


6 CONTACT SIZE AND REAR SEAL WIRE RANGE:						
	CONTACT SIZE	MIN. INSUL O.D.	MAX. INSUL O.D.	TYPICAL WIRE RANGE		
	16	1.35 mm (.053 in)	3.05 mm (.120 in)	14 - 20 AWG (2.0-0.5mm²)		



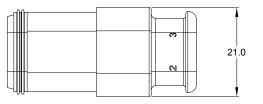

PART NUMBER CHART				
COLOR	PART NUMBER			
GREY	AT06-4S-SR02GRY			
BLACK	AT06-4S-SR02BLK			
BLUE	AT06-4S-SR02BLU			
BROWN	AT06-4S-SR02BRN			
GREEN	AT06-4S-SR02GRN			
RED	AT06-4S-SR02RED			
WHITE	AT06-4S-SR02WHT			
YELLOW	AT06-4S-SR02YEL			
ORANGE	AT06-4S-SR02ORG			



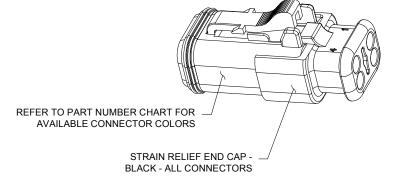

	SEE PART N	UMBER C	HART					
	PART N	NUMBER		DESCRIPTION				
QUANTITY			MATERIALS LIST					
	WISE SPECIFIED	SIGNATURES DATE			A la a l			
1) All dimensions are in metric(mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 Fractions ±1/64		DRAWN:	LOUIE	23NOV20	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08	Angles ±1°	CHECKED:	ORION	25NOV20	Sine Systems - www.amphenol-sine.com	_		
3) Note reference = X MATERIAL SPECIFICATIONS:		ENGINEER:			44724 Morley Drive Clinton Township, MI 48036			
		APPROVAL:	TOMMY	27NOV20				
			PLUG, 4 SOCKET, AT SERIES, STRAIN RELIE					
PROCESS SPECIFICATIONS: NEXT ASSY:			G IS SUPPLIED F					
		INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAI		RMANCE DATA ROPERTY OF DN. NO RIGHTS LIED. ALL	B C- AT06-4S-SR02XXX A	VISION \5		
		MANUFACTURING VARIATIONS.			SCALE: NONE SHEET 1 OF	1		

AT Series™ - Contact Size 16 Options

Machined Contacts, Sockets & Pins							
Part Number	Description	Size	AWG	Туре			
AT60-215-1631	Male Contact - Pin, Gold-plated	16	14	Machined			
AT62-209-1631	Female Contact - Socket, Gold-plated 16 14 Machir						
AT60-215-16141	Male Contact - Pin, Nickel-plated	16	14	Machined			
AT62-209-16141	Female Contact - Socket, Nickel-plated	16	14	Machined			
AT60-202-1631	Male Contact - Pin, Gold-plated	16	16-20	Machined			
AT62-201-1631	Female Contact - Socket, Gold-plated	16	16-20	Machined			
AT60-202-16141	Male Contact - Pin, Nickel-plated	16	16-20	Machined			
AT62-201-16141	Female Contact - Socket, Nickel-plated		16-20	Machined			
AT60-202-1631-22 Male Contact - Pin, Gold-plated		16	22-24	Machined			
AT62-201-1631-22 Female Contact - Socket, Gold-plated		16	22-24	Machined			
AT60-202-16141-22 Male Contact - Pin, Nickel-plated 16 22-24		Machined					
AT62-201-16141-22 Female Contact - Socket, Nickel-plated 16 22-24 Mach			Machined				

Tooling - Machined Contacts					
Part Number Description					
	CA-5D12	Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only)			
3	CA-5E12	Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)			

Contact Removal Tools					
Part	Part Number	Description			
	ATRT-100	Used for removal of contacts for A Series™ products			
	AT11-310-1605	Contact Removal Tool, Plastic, Size 16			
	A114017	Sealing Plug, Size 16, White			

Stamped & Formed Contacts, Sockets & Pins							
Part Number Description			AWG	Туре			
AT60-14-0144	Male Contact - Pin, Gold-plated	16	14-16	Stamped & Formed			
AT62-14-0144	Female Contact - Socket, Gold-plated	16	14-16	Stamped & Formed			
AT60-14-0122	Male Contact - Pin, Nickel-plated	16	14-16	Stamped & Formed			
AT62-14-0122	Female Contact - Socket, Nickel-plated	16	14-16	Stamped & Formed			
AT60-16-0144	Male Contact - Pin, Gold-plated	16	16-18	Stamped & Formed			
AT62-16-0144	Female Contact - Socket, Gold-plated	16	16-18	Stamped & Formed			
AT60-16-0122	Male Contact - Pin, Nickel-plated	16	16-18	Stamped & Formed			
AT62-16-0122	Female Contact - Socket, Nickel-plated	16	16-18	Stamped & Formed			
AT60-16-0644	Male Contact - Pin, Gold-plated	16	18-20	Stamped & Formed			
AT62-16-0644	Female Contact - Socket, Gold-plated	16	18-20	Stamped & Formed			
AT60-16-0622	Male Contact - Pin, Nickel-plated	16	18-20	Stamped & Formed			
AT62-16-0622	Female Contact - Socket, Nickel-plated	16	18-20	Stamped & Formed			
AT60-16-0844	Male Contact - Pin, Gold-plated	16	20-22	Stamped & Formed			
AT62-16-0844	Female Contact - Socket, Gold-plated	16	20-22	Stamped & Formed			
AT60-16-0822	Male Contact - Pin, Nickel-plated	16	20-22	Stamped & Formed			
AT62-16-0822	Female Contact - Socket, Nickel-plated	16	20-22	Stamped & Formed			

Tooling - Stamped & Formed Contacts					
Part Part Number Description					
	MFX-3950	Crimp Die - Size 16, 18-20AWG (S&F contacts only)			
	MFX-3953	Crimp Die - Size 16, 16-18AWG (S&F contacts only)			
	MFX-3975	Crimp Die - Size 16, 14-16AWG (S&F contacts only)			
	MFX-3990	Crimp Die - Size 16, 20-22AWG (S&F contacts only)			
	ATT-16-00	Hand Crimp Tool - Size 16, 14-16AWG (S&F contacts only)			
	ATT-16-01	Hand Crimp Tool - Size 16, 18-20AWG (S&F contacts only)			
	ATT-1612-03	Hand Crimp Tool - Size 16, 20-22AWG (S&F contacts only)			

Amphenol Sine Systems 44724 Morley Drive Clinton Township, MI 48036 USA www.amphenol-sine.com 09/2021

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Automotive Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

003-018-000 60403001 60993906-B M902-2131 M902-2161 72.330.1035.1 73.353.4028.0 F119300-B F166900 F258300-B F358300-B F407400 F444110 F487000 F509500B-B 827153-1 8N1515-32-24P 9-1326729-8 925474-1 928905-1 964562-4 968782-1 GT17SA-8DS-HU 98891-1012 98947-1016 12004475-L 12010290 12010309-B 12015454 12020219-B 12020308 12041318-B 12052225-L 12052466 12059125 12064869 12004327-B 12010503-B 12015308 12015384 12015909 1-21030-1 12041254 12041318 12047946-B 12047957 12047957-L 12059473 12066261 12110546