



NTC THERMISTORS: TYPE BR11/14/16/23


GLASS ENCAPSULATED BEAD THERMISTOR

DESCRIPTION:


Small glass encapsulated bead thermistors on fine diameter alloy lead-wires.

FEATURES:

- Suitable for most low cost temperature measurement, control or compensation applications
- Very fast thermal response times
- Rugged glass encapsulation provides hermetic seal and better strain relief than small glass coated bead thermistors
- Long term stability is better than small glass coated bead thermistors.
- Suitable for self-heated applications such as liquid level sensing or gas flow measurement
- Recommended for all applications where the customer will perform further assembly operations
- Normal operating/storage temperatures range from -80°C to:
 - 105°C for Material system E0
 - 200°C for Material systems A1 through A4
 - 300°C for Material systems A5 through D17
- Unaffected by severe environmental exposures, including nuclear radiation.
- Intermittent operation to 600°C is permissible, however, stability will be degraded.

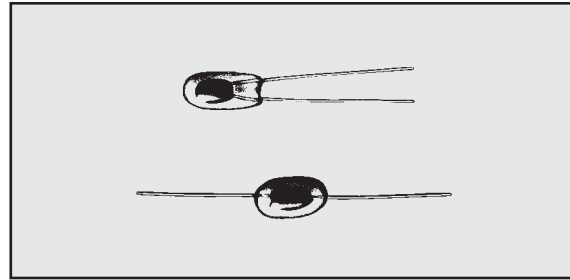

DIMENSIONS:

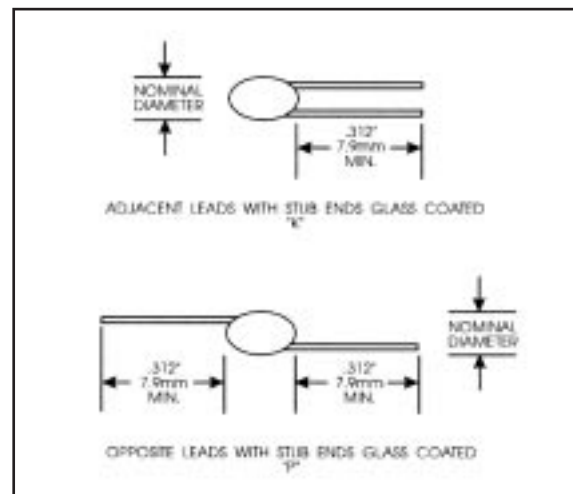


OPTIONS:

- Non-standard resistance tolerances
- Non-standard resistance values
- Reference temperature(s) other than 25°C - specify
- Mounting in special housings or enclosures
- Longer continuous leads
- Welded or soldered extension leads - specify lead material, diameter, length and insulation, if any.
- Solderable or weldable/solderable leads
- Leads can be pre-tinned or treated for improved soldering
- Calibration - specify temperature(s)
- Interchangeable pairs or sets, R-vs-T curve matching – specify temperature range(s) and tolerance(s)
- Special aging and conditioning for high reliability applications

CODING:

The code number to be ordered may be specified as follows:

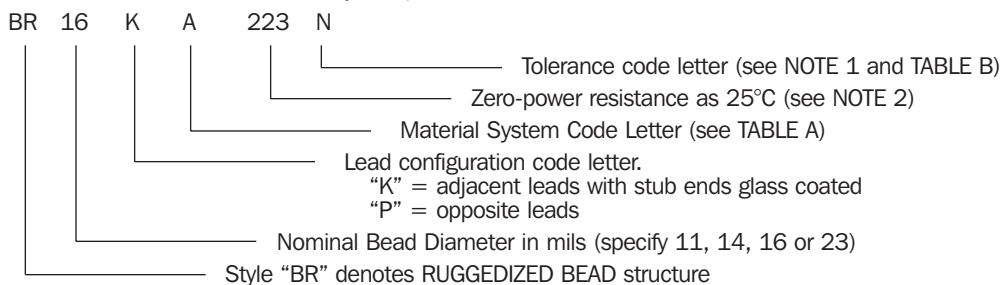

NOTE 1: Special tolerances are available upon request. Consult factory for special resistance tolerances, non-standard resistances and/or non-standard temperatures.

NOTE 2: The zero-power resistance at 25°C, expressed in Ohms, is identified by a three digit code number. The first two digits represent significant figures, and the last digit specifies the number of zeros to follow. Example: 22k Ohms = "223". The standard resistance values are from the 24-Value series decade as specified in Military Standard MS90178.

1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.2 / 2.4 / 2.7 / 3.0
 3.3 / 3.6 / 3.9 / 4.3 / 4.7 / 5.1 / 5.6 / 6.2 / 6.8 / 7.5 / 8.2 / 9.1

TABLE A: THERMAL AND ELECTRICAL PROPERTIES:

The following table lists the THERMAL and ELECTRICAL properties for all SMALL RUGGEDIZED THERMISTORS. All definitions and test methods are per MIL-PRF-23648.

THERMISTOR SERIES:			BR11	BR14	BR16	BR23
BODY DIMENSIONS:						
	Nom. Diameter:		.011" (.28 mm)	.014" (.36 mm)	.016" (.41 mm)	.023" (.58 mm)
	Max. Diameter:		.012" (.30 mm)	.016" (.41 mm)	.017" (.43 mm)	.025" (.63 mm)
	Max. Length:		.024" (.61 mm)	.032" (.81 mm)	.034" (.86 mm)	.056" (1.4 mm)
lead-wires:						
	Nom. Diameter:		.0007" (.02 mm)	.0011" (.03 mm)	.0011" (.03 mm)	.002" (.05 mm)
	Minimum Lead Length:		.312" (7.9 mm)	.312" (7.9 mm)	.312" (7.9 mm)	.312" (7.9 mm)
	Lead Material:		Platinum Alloy	Platinum Alloy	Platinum Alloy	Platinum Alloy
	Available Cuts:		"K" adjacent "P" opposite	"K" adjacent "P" opposite	"K" adjacent "P" opposite	"K" adjacent "P" opposite
MATERIAL SYSTEM:						
CODE LETTER	R-vs-T CURVE	25/125 RATIO	Nominal Resistance Range @ 25°C	Nominal Resistance Range @ 25°C	Nominal Resistance Range @ 25°C	Nominal Resistance Range @ 25°C
E	0	5.0	—	—	—	—
A	1	11.8	1.0 kΩ – 1.5 kΩ	300 Ω – 680 Ω	300 Ω – 680 Ω	300 Ω – 680 Ω
A	2	12.5	1.5 kΩ – 3.6 kΩ	680 Ω – 1.6 Ω	680 Ω – 1.6 Ω	680 Ω – 1.6 Ω
A	3	14.0	3.6 kΩ – 7.5 kΩ	1.6 kΩ – 3.6 kΩ	1.6 kΩ – 3.6 kΩ	1.6 kΩ – 3.6 kΩ
A	4	16.9	7.5 kΩ – 15 kΩ	3.6 kΩ – 6.8 kΩ	3.6 kΩ – 6.8 kΩ	3.6 kΩ – 6.8 kΩ
A	5	19.8	15 kΩ – 51 kΩ	6.8 kΩ – 27 kΩ	6.8 kΩ – 27 kΩ	6.8 VΩ – 27 kΩ
A	6	22.1	—	—	—	—
A	7	22.7	51 kΩ – 150 kΩ	27 kΩ – 75 kΩ	27 kΩ – 75 kΩ	27 kΩ – 75 kΩ
B	8	29.4	150 kΩ – 270 kΩ	75 kΩ – 130 kΩ	75 kΩ – 130 kΩ	75 kΩ – 130 kΩ
B	9	30.8	270 kΩ – 470 kΩ	130 kΩ – 240 kΩ	130 kΩ – 240 kΩ	130 kΩ – 240 kΩ
B	10	32.3	470 kΩ – 750 kΩ	240 kΩ – 360 kΩ	240 kΩ – 360 kΩ	240 kΩ – 360 kΩ
B	11	35.7	750 kΩ – 1.6 MΩ	360 kΩ – 820 kΩ	360 kΩ – 820 kΩ	360 kΩ – 820 kΩ
B	12	38.1	1.6 MΩ – 2.7 MΩ	820 kΩ – 1.3 MΩ	820 kΩ – 1.3 MΩ	820 kΩ – 1.3 MΩ
B	13	45.0	2.7 MΩ – 6.8 MΩ	1.3 MΩ – 3.3 MΩ	1.3 MΩ – 3.3 MΩ	1.3 MΩ – 3.3 MΩ
B	14	48.1	6.8 MΩ – 10 MΩ	3.3 MΩ – 6.8 MΩ	3.3 MΩ – 6.8 MΩ	3.3 MΩ – 6.8 MΩ
B	15	56.5	—	6.8 MΩ – 10 MΩ	6.8 MΩ – 10 MΩ	6.8 MΩ – 10 MΩ
D	16	75.6	—	—	—	—
D	17	81.0	—	—	—	—
THERMAL TIME CONSTANT:						
	Still Air at 25°C:		0.8 sec	1.0 sec	1.2 sec	1.7 sec
	Plunge into Water:		12 msec	14 msec	16 msec	40 msec
DISSIPATION CONSTANT:						
	Still Air at 25°C:		.065 mW/°C	.10 mW/°C	.12 mW/°C	.18 mW/°C
	Still Water at 25°C:		.33 mW/°C	.50 mW/°C	.60 mW/°C	.90 mW/°C
POWER RATING: (in air)						
	Maximum Power Rating:		.007 Watts	.015 Watts	.015 Watts	.020 Watts
	100% Max. Power to:		125°C	125°C	125°C	125°C
	Derated to 0% at:		300°C	300°C	300°C	300°C

RESISTANCE -VS- TEMPERATURE CHARACTERISTICS: The nominal resistance range for the zero-power resistance at 25°C is shown for each THERMISTOR Type and each available Material System. Each Material System is denoted by an ordering Code Letter, a referenced Curve number and the nominal 25°C/125°C resistance ratio.

TABLE B: STANDARD TOLERANCES:

Tolerance Code Letter	F	G	J	K	L	M	N	P	Q	R	S
± % Tolerance at 25°C	1	2	5	10	15	20	25	30	40	50	Non-standard – consult factory

BOWTHORPE THERMOMETRICS
 Crown Industrial Estate, Priorswood Road
 Taunton, Somerset TA2 8QY UK
 Tel +44 (0) 1823 335200
 Fax +44 (0) 1823 332637

THERMOMETRICS, INC.
 808 US Highway 1
 Edison, New Jersey 08817-4695 USA
 Tel +1 (732) 287 2870
 Fax +1 (732) 287 8847

KEYSTONE THERMOMETRICS CORPORATION
 967 Windfall Road
 St. Marys, Pennsylvania 15857-3397 USA
 Tel +1 (814) 834 9140
 Fax +1 (814) 781 7969

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NTC \(Negative Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Amphenol](#) *manufacturer:*

Other Similar products are found below :

[118-253FAJ-P01](#) [121-202EAC-P01](#) [123-802EAJ-P01](#) [128-105NDP-Q02](#) [129-202VME-S01](#) [135-503LAD-J01](#) [B57250V2473F560](#)
[B57620C472K962](#) [B57620C5103J062](#) [B57621C5102J062](#) [A1004SG22P0](#) [192-103LPR-A01](#) [199-303KAF-A02](#) [30054-4](#) [B57471V2474H062](#)
[B57620C5102J062](#) [B57620C5223J062](#) [500-52AA04-101](#) [526-31AA19-104](#) [526-31AN12-202](#) [103AT-5-1P-FT](#) [10K3A542I](#) [111-802EAJ-901](#)
[112-103FAG-H02](#) [112-104KAG-B01](#) [11028414-00](#) [111-182CAG-H01](#) [112-103FAF-H01](#) [112-104KBF-F01](#) [118-202CAJ-P01](#) [526-31AA79-](#)
[102](#) [B57442V5103J62](#) [517-59CL01-202](#) [B57401V2103H62](#) [B57621C5472J62](#) [11032565-00](#) [194303KEVA01](#) [NTCACAPE3C90193](#)
[B57359V2224J260](#) [B57620C0103K062](#) [B57343V5103J360](#) [NXRT15WB473FA1B040](#) [50070974-003-01](#) [189-602LDR-A01](#)
[B57621C5472K062](#) [135-105QAF-J02](#) [B57421V2153J062](#) [B57230V2103H260](#) [B57471V2684H062](#) [B57471V2333H062](#)