


PC card drilling dimensions (after plating)  
(thickness 1.60 ± 0.20mm)

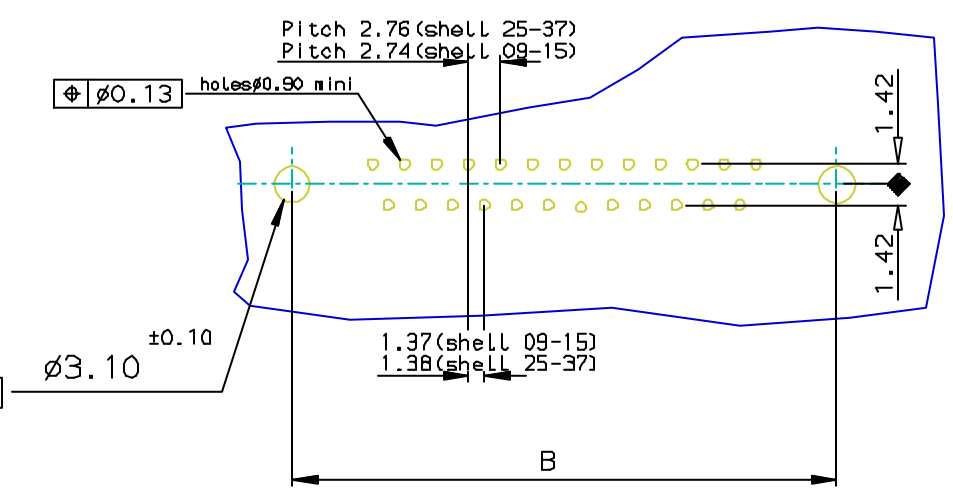

Part Number & Date Code Printing

SHELL	A ± 0.38	B ± 0.12	C ± 0.10	D ± 0.25	G ± 0.25	Plating: 0.76µ AU	Plating: Flash AU
09	30.81	24.99	16.96	16.21	5.90	D09S23B6G*00**	D09S23B4G*00**
15	39.14	33.32	25.18	24.54	5.90	D15S23B6G*00**	D15S23B4G*00**
25	53.03	47.04	39.12	38.25	5.70	D25S23B6G*00**	D25S23B4G*00**
37	69.32	63.50	55.68	54.71	5.70	D37S23B6G*00**	D37S23B4G*00**

**REQUIREMENTS**

**Technical characteristics:**  
 Shell: steel tin/Zinc Cr3 plated  
 Insulators: self-extinguishing black polyster, UL Class 94V0  
 Contacts size 20: phosphor bronze, gold on mating end, bright tin on termination end over nickel on entire contact  
 Cycles :500 for protection 6  
 :200 for protection 4  
 Harpoons: phosphor bronze, tin plated  
 Metal plate for electrical continuity: brass, tin/Zinc Cr3 plated  
 Nuts: brass, tin/Zinc Cr3 plated torque: 0.7N/m  
**Electrical characteristics:**  
 max. current rating: 5A  
 Test voltage: 1000V  
 Rated voltage: 300V  
 Contact resistance: <15mΩ  
 Shell resistance: <5mΩ  
 Insulation resistance: >5000MΩ  
**Climatic characteristics:**  
 Operating temperature range: -55°C +125°C  
**Dimensions:**  
 In accordance with MIL-C-24308

LF FOR LEAD FREE

Threaded ØT M3 = L  
 Threaded ØT 4.40 = X

FOR ROHS DETAILS REFER DWG. NO: C01-8646-0000

European Views

rev	ecn no	dr	date
B	105-0124	JS	2005/07/27
C	106-0074	SK	2006/06/08
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	JOHN SLEEBA	1999/05/17	ANGULAR	0.X ± 0.1
Eng	GEORGE VJ	1999/05/17	LINEAR	0.XX ± 0.1
Chr	GEORGE VJ	2005/07/27	0.XX ± 1*	0.XXX ± 0.1
Appr	KVSD	2005/07/27	Product family	D-SUB
title		SOCKET CONNECTOR DELTA D with nut, harpoon, metal bracket		size A3
catalog no		DELTA-D		Scale 1:1
dwg no		C01-8646-0674		ECN -
customer		sheet 1 of 1		Spec ref -
Rev.		C		



Copyright FCI.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [012-9507-004](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#)  
[012-0467-000](#) [012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-14S-2PCA34](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#)  
[CT6-14S-2SC](#) [CT6E14SA7SC](#) [CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#)  
[6STD09SCM99B30X](#) [6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#)  
[747552-3](#) [MD1-21PS](#) [MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#)  
[MIKQ7-7PH077](#) [MIKQ7-7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-](#)  
[GROM-SEALING](#) [GDA15P](#) [GDAY15PB](#)