


# ELFH SERIES PART NUMBERING SCHEME

REV	ECN	APPD
A	3730	JEC 4/12/99
B	3865	JEC 11/9/99
C	3899	JEC 1/4/00
D	4295	IQ 2/7/01
E	4711	IQ 1/8/02
F	4821	IQ 4/4/02
G	5071	IQ 12/04/02
H	5178	IQ 3/20/03
I	5742	<i>DN 12/28/05</i>

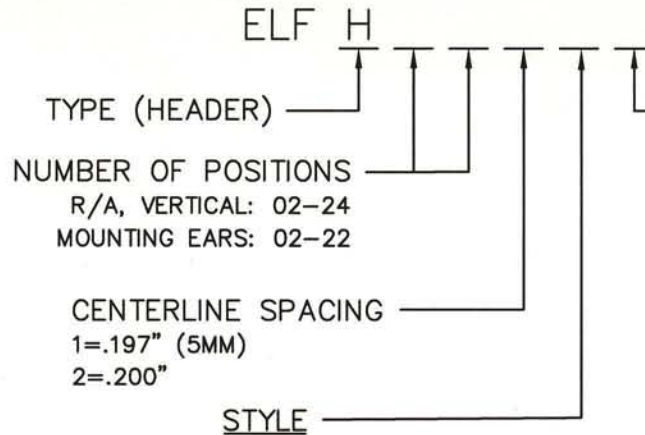

R/A, VERTICAL: 02-24  
MOUNTING EARS: 02-22

CENTERLINE SPACING  
1=.197" (5MM)  
2=.200"

<b>RIGHT ANGLE</b>	<b>VERTICAL</b>
1=CLOSED ENDS	5=CLOSED ENDS
2=OPEN ENDS	6=OPEN ENDS
3=CLOSED ENDS; HIGH TEMP. *	8=CLOSED ENDS; HIGH TEMP. *
4=OPEN ENDS; HIGH TEMP. *	9=OPEN ENDS; HIGH TEMP. *

### OPTIONS

**COLOR/PLATING**  
0=BLACK, TIN (STANDARD)  
1=BLACK, SELECTIVE GOLD  
G=GREEN, TIN  
1G=GREEN, SEL. GOLD

### MOUNTING EARS

OE= FLUSH MOUNT BLACK, TIN  
1E= FLUSH MOUNT BLACK, SEL. GOLD  
GE= FLUSH MOUNT GREEN, TIN  
EG= FLUSH MOUNT GREEN, SEL. GOLD

CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:

- CUSTOM COLORS
- CUSTOM MARKING
- CUSTOM KEYING
- SELECTIVE CONTACT LOADING

**RU**  
RATINGS

CURRENT - 15A  
VOLTAGE - 300V  
U.L. FILE NO. E83421

**SP**  
RATINGS

CURRENT - 15A  
VOLTAGE - 300V  
CSA FILE NO. LR69703

DIN VDE 0627:1986  
DIN VDE 0110-1:1989  
EN 60947-1:1991  
EN 60947-7-1:1992

CURRENT - 15A  
VOLTAGE - 300 V  
TUV FILE NO. 20396

\* HIGH TEMP. MATERIAL WILL WITHSTAND COMPONENT EQUILIBRIUM TEMPERATURES OF 260°C FOR 3 MINUTES DURING THE SOLDERING PROCESS

OPERATING TEMPERATURE RANGE:  
-40°C - 105°C

### MATERIALS:




HOUSING: PBT, UL 94 V-0; STANDARD TEMP.  
\*NYLON 46, UL 94 V-0; HIGH TEMP.

CONTACT: BRASS

PLATING: TIN, 200 MICROINCH  
GOLD, 30 MICROINCH




DIMENSIONS ANSI Y14.5M UNITS: INCHES ACAD FILE	TOLERANCES .XX ±.01 .XXX ±.005 ANGLES ±2°	PROJECTION 	<b>Amphenol Pcd</b> SPECIFICATION DRAWING		TITLE  ELFH SERIES HEADER ASSEMBLY		
			ENGR J. WILKINSON 11/8/98				
ORIGINAL STAMPED IN RED	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA		CHKD A. PATRIE 12/4/98		SIZE A	DWG NO. ELFH02110	REV I
			APPD J. CAHALY 12/11/98				

CLOSED ENDS

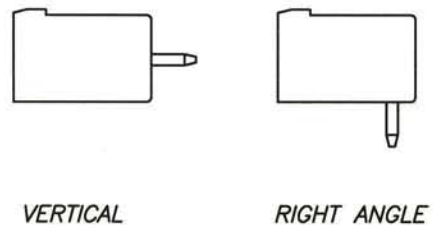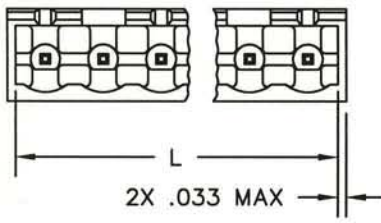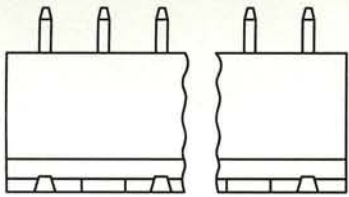




$$L = (\text{NUM OF POS} \times \text{CL SPACING}) + .006$$

MOUNTING EARS

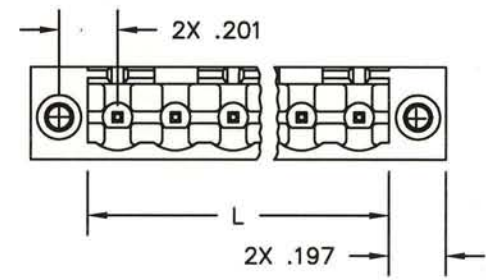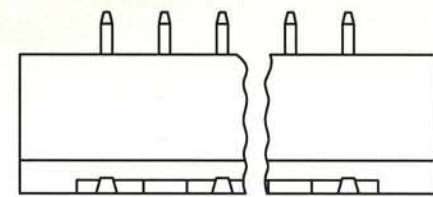


$$L = (\text{NUM OF POS} \times \text{CL SPACING}) + .006$$

OPEN ENDS

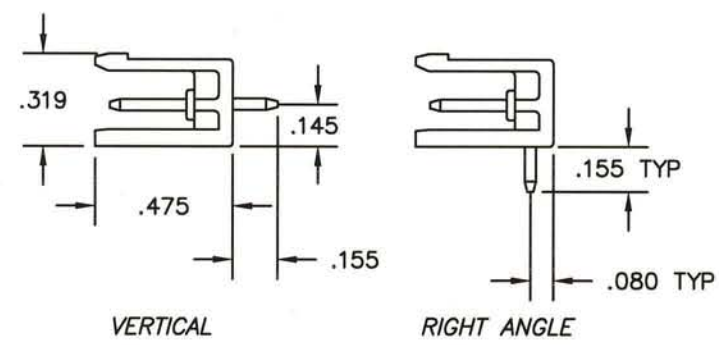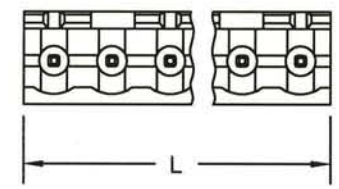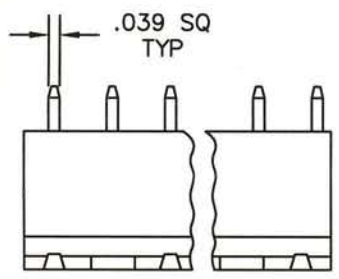

$$L = \text{NUM OF POS} \times \text{CL SPACING}$$

PRINTED CIRCUIT BOARD CONFIGURATION

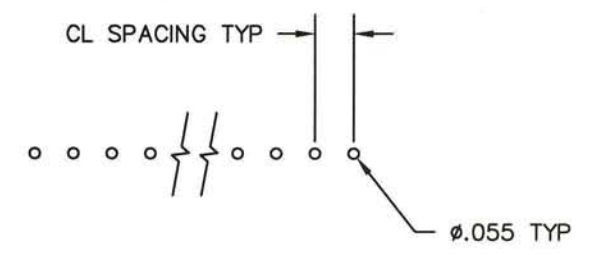

RECOMMENDED PCB THICKNESS: .062±.008

SIZE	DWG NO.	REV
A	ELFH02110	I
CODE: 58982	SCALE: NONE	SHEET 2 OF 2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [amphenol manufacturer](#):*

Other Similar products are found below :

[CTV06RGQF-17-52P](#) [CTVPS00RGF-23-6P-LC](#) [GC835TY2S](#) [CF-509621-29P](#) [BF8-1218-31SV-Y70](#) [TVP00RGW-23-6SA\(LC\)](#)  
[RNJ27CI1535P014](#) [10-553998-139](#) [21-033388-031](#) [10-507142-843](#) [MS27473P14B18S](#) [GTC06G32-76PY-B30-LC](#) [GTC06G32-76PY-LC](#)  
[GTC06G32-76PY](#) [GTC06G32-76P-B30-LC](#) [GTS06G-32-7S](#) [GTC06-36-78PX-023](#) [ACC02E28-51S-003-B30-LC](#) [TV06RL-13-35SD-LC](#)  
[TV06RL-13-35SD](#) [TV06RL-13-98SD-LC](#) [TV06RL-13-98SD](#) [TV07RW-15-5BE](#) [AIB6-36-78PC-025](#) [GTC06G32-76PW-LC](#) [GTC06G32-](#)  
[76PX-LC](#) [GTC06G32-76PZ-B30-LC](#) [GTC06G32-76PX-B30-LC](#) [GTC08AF32-15SX-B30-LC](#) [GTC06G32-76PZ](#) [GTC06G32-76PX](#)  
[GTC030F14S-2S-025-B30](#) [TVP00RW-23-53AD](#) [TV07RW1597PE](#) [100-007-213-002-001](#) [5M30-61](#) [FSPP-103-00-004](#) [360031](#) [10-037090-](#)  
[161](#) [10-541504-001](#) [10-580902-409](#) [TV97RW-9-9S\(S15\)](#) [TVPS00RGF-9-5P-LC](#) [TVPS00RGF-9-5PA-LC](#) [TVP00RGQW-21-75P-LC](#)  
[TV06RW-25-90AE](#) [97-3108B16S-5PW-417](#) [PT06J20-24SW](#) [97-3108B16S-4PY-417](#) [97-3108B16S-4PX-417](#)