


# ELFH SERIES PART NUMBERING SCHEME

REV	ECN	APPD
A	3730	JEC 4/12/99
B	3865	JEC 11/9/99
C	3899	JEC 1/4/00
D	4295	IQ 2/7/01
E	4711	IQ 1/8/02
F	4821	IQ 4/4/02
G	5071	IQ 12/04/02
H	5178	IQ 3/20/03
I	5742	PN 12/28/05

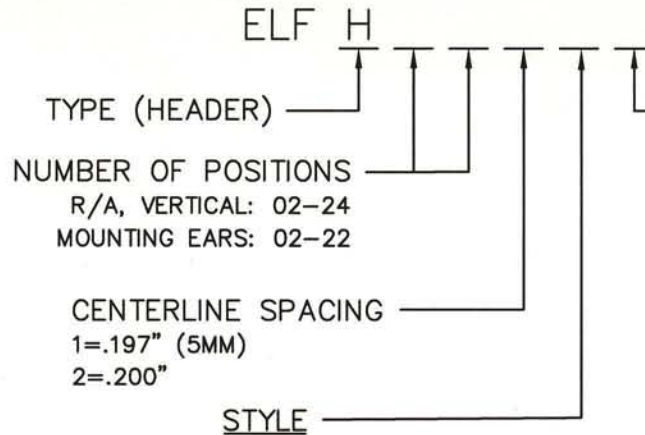

TYPE (HEADER)

NUMBER OF POSITIONS  
R/A, VERTICAL: 02-24  
MOUNTING EARS: 02-22

CENTERLINE SPACING  
1=.197" (5MM)  
2=.200"

STYLE

RIGHT ANGLE	VERTICAL
1=CLOSED ENDS	5=CLOSED ENDS
2=OPEN ENDS	6=OPEN ENDS
3=CLOSED ENDS; HIGH TEMP. *	8=CLOSED ENDS; HIGH TEMP. *
4=OPEN ENDS; HIGH TEMP. *	9=OPEN ENDS; HIGH TEMP. *

OPTIONS

COLOR/PLATING  
0=BLACK, TIN (STANDARD)  
1=BLACK, SELECTIVE GOLD  
G=GREEN, TIN  
1G=GREEN, SEL. GOLD

MOUNTING EARS  
OE= FLUSH MOUNT BLACK, TIN  
1E= FLUSH MOUNT BLACK, SEL. GOLD  
GE= FLUSH MOUNT GREEN, TIN  
EG= FLUSH MOUNT GREEN, SEL. GOLD

CONSULT PCD FOR PART NO. AND AVAILABILITY OF FOLLOWING OPTIONS:  
- CUSTOM COLORS  
- CUSTOM MARKING  
- CUSTOM KEYING  
- SELECTIVE CONTACT LOADING

**RU**  
RATINGS

CURRENT - 15A  
VOLTAGE - 300V  
U.L. FILE NO. E83421

**SP**  
RATINGS

CURRENT - 15A  
VOLTAGE - 300V  
CSA FILE NO. LR69703

DIN VDE 0627:1986  
DIN VDE 0110-1:1989  
EN 60947-1:1991  
EN 60947-7-1:1992

CURRENT - 15A  
VOLTAGE - 300 V  
TUV FILE NO. 20396


\* HIGH TEMP. MATERIAL WILL WITHSTAND COMPONENT EQUILIBRIUM TEMPERATURES OF 260°C FOR 3 MINUTES DURING THE SOLDERING PROCESS

OPERATING TEMPERATURE RANGE:  
-40°C - 105°C

MATERIALS:  
HOUSING: PBT, UL 94 V-0; STANDARD TEMP.  
\*NYLON 46, UL 94 V-0; HIGH TEMP.  
CONTACT: BRASS  
PLATING: TIN, 200 MICROINCH  
GOLD, 30 MICROINCH

DIMENSIONS  
ANSI Y14.5M  
UNITS: INCHES  
ACAD FILE

TOLERANCES  
.XX ±.01  
.XXX ±.005  
ANGLES ±2°



**Amphenol Pcd**  
SPECIFICATION DRAWING

ENGR  
J. WILKINSON 11/8/98

TITLE

ELFH SERIES  
HEADER ASSEMBLY

ORIGINAL  
STAMPED  
IN RED




THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC. PEABODY, MA

CHKD  
A. PATRIE 12/4/98

APPD  
J. CAHALY 12/11/98




SIZE A	DWG NO. ELFH02110	REV I
CODE: 58982	SCALE: NONE	SHEET 1 OF 2

CLOSED ENDS

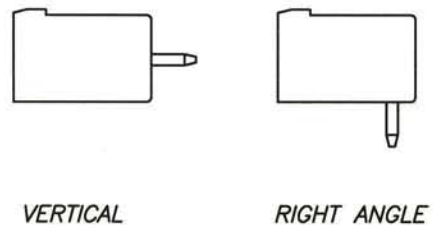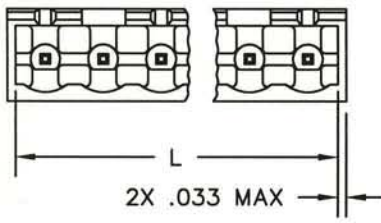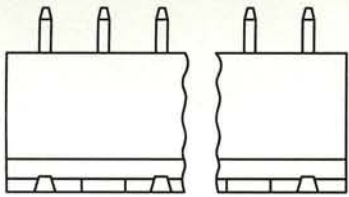




$$L = (\text{NUM OF POS} \times \text{CL SPACING}) + .006$$

MOUNTING EARS

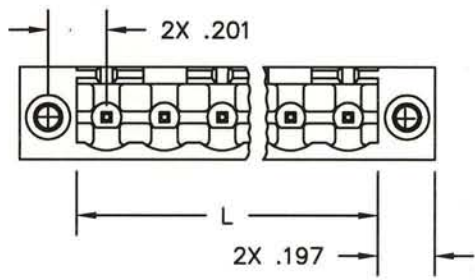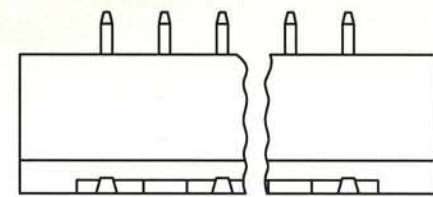


$$L = (\text{NUM OF POS} \times \text{CL SPACING}) + .006$$

OPEN ENDS

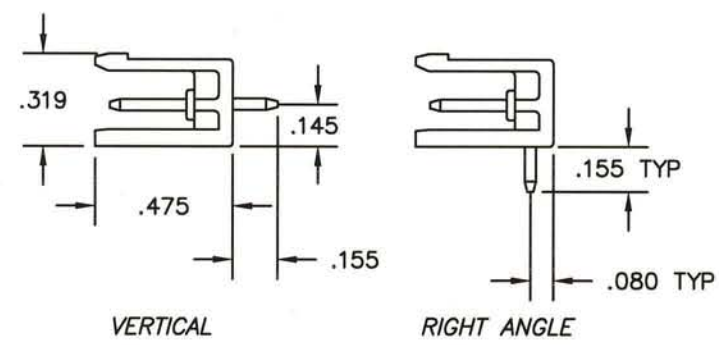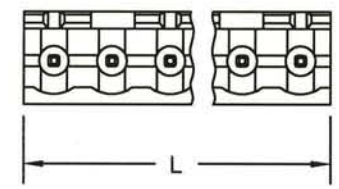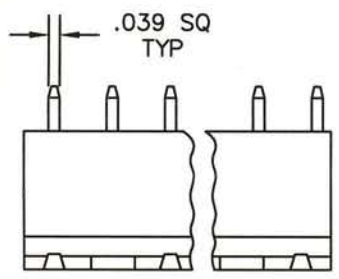

$$L = \text{NUM OF POS} \times \text{CL SPACING}$$

PRINTED CIRCUIT BOARD CONFIGURATION

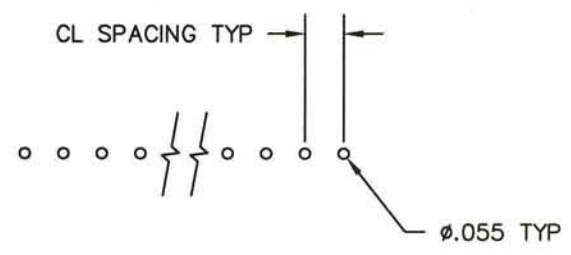

RECOMMENDED PCB THICKNESS: .062±.008

SIZE	DWG NO.	REV
A	ELFH02110	I
CODE: 58982	SCALE: NONE	SHEET 2 OF 2

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [734-104](#) [734-302](#) [8-141-P](#) [8426620000](#) [860505](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#)  
[PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFH16150](#) [ELFP03110](#) [ELFP10210](#) [ELFT06250](#)  
[ELVP03100](#) [1700410](#) [1700425](#) [1702246](#) [1717806](#) [1719600](#) [1734692](#) [1734795](#) [1740291](#) [1752441](#) [1752865](#) [1754144](#) [1760051](#) [1760336](#)  
[1777701](#) [1783410](#) [1800227](#) [1801080](#) [1836888](#) [1848818](#) [1849079](#) [1860870](#) [1876327](#) [1896417](#) [1903096](#) [19346](#) [1946309](#) [1970579](#) [1973592](#)