

0.50mm Pitch FFC/FPC – F300/F301 Series

RIGHT ANGLE ZIF FLEX CONNECTOR

F300/F301 series are 0.50mm pitch vertical ZIF flex connectors with front flip locking mechanism, double contacts and surface mount termination. These connectors feature a height of 2.00mm and are offered in 10 to 60 contacts. These series feature a cable thickness of 0.30mm and provide enhanced durability of 30 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, communication, consumer and medical applications.

- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Double contact points provide enhanced contact stability
- Ensures high solderability and high durability
- Wide operating temperature range of -40°C to $+105^{\circ}\text{C}$



TARGET MARKETS



FEATURES

- ZIF (Zero Insertion Force) mechanism
- Front flip locking function
- Double contact points
- Design against solder and flux wicking
- High-temperature thermoplastic housing
- 10 to 60 positions available
- Lead and halogen-free

BENEFITS

- Absence of frictional mating wear resulting in high mating cycle life
- Easy to operate and strong FFC/FPC retention makes it vibration-proof
- Ensures enhanced contact stability
- Ensures high solderability
- Wide operating temperature range of -40°C to $+105^{\circ}\text{C}$
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

▶ 0.50mm Pitch FFC/FPC – F300/F301 Series

TECHNICAL INFORMATION

MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Actuator: PA9T, black color (UL94V-0)
- Contact: Phosphor bronze, T=0.15mm
- Stator: Brass, T=0.15mm

MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 30gf/pin
- Terminal Retention Force: 100gf/terminal min.
- Stator plate Retention Force: 100gf/plate min.
- Durability: 30 mating cycles

ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: 30MΩ max.
- Insulation Resistance: 500MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

PACKAGING

- Tape & Reel

APPROVALS AND CERTIFICATIONS

- UL file number E106764
- RoHS compliant

SPECIFICATION

- Aorora Product Specification: IS.EQC.033

ENVIRONMENTAL

- Operating Temperature Range: -40°C to +105°C

TARGET MARKETS/APPLICATIONS



Car Multimedia
Car Navigation
Dashboard
PND



Base Station
Power
Switches



Notebook
Tablets
Wearables
Gaming
DSC
LCD & PDP TV



Router
Server
ODD
HDD




Sensing element
Monitoring camera
Human Machine Interface
Industrial PC
Robotics



Ultrasonic
Patient Monitor
MRI
CT
Infusion Pump

PART NUMBER SELECTOR

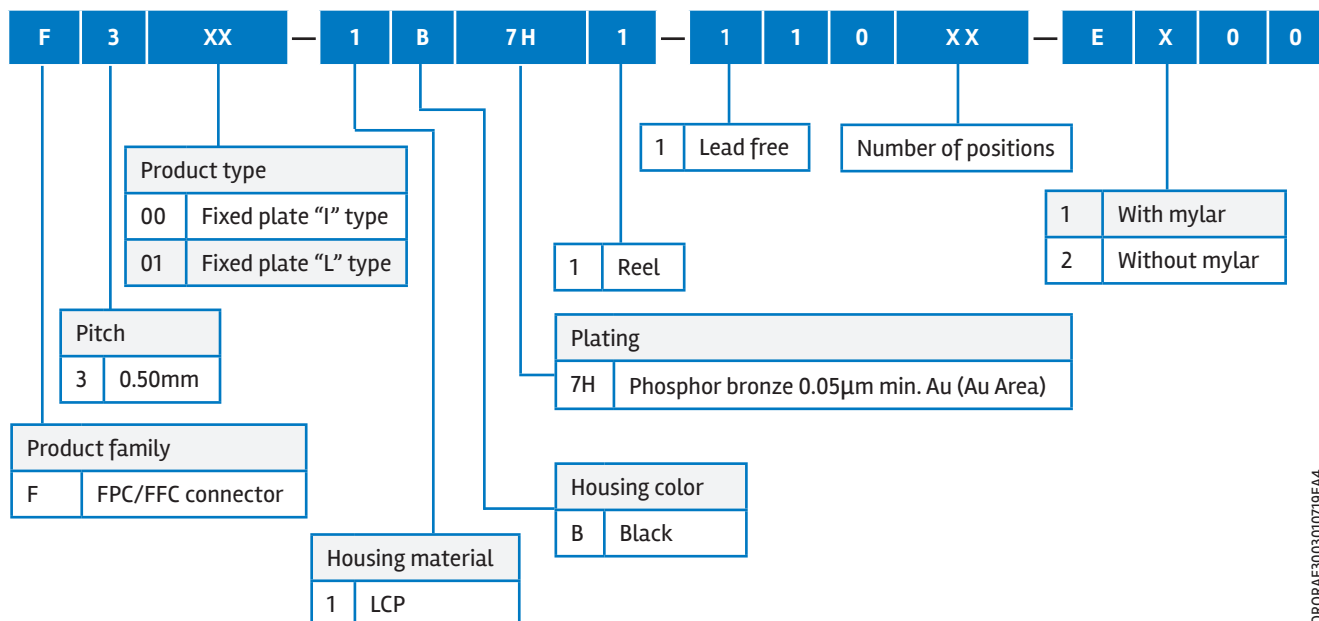

AORORAF3003010719EA4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [FFC & FPC Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[K-FC20](#) [FH29B-80S-0.2SHW\(99\)](#) [FPH-2022G](#) [AYF332735](#) [52610-1075](#) [52610-1275](#) [52610-1934](#) [501864-3091-TR225](#) [086222026001800](#)
[52610-0675](#) [62684-36210E9ALF](#) [52746-1671-TR250](#) [10051922-2810EHLF](#) [6-520415-9](#) [SFV6R-1STE9HLF](#) [XF3M-2915-1B-R100](#)
[1658549-1](#) [46214008010800](#) [AYF534065TA](#) [AYF351525](#) [086212040340800+](#) [AYF530365TA](#) [67000-014LF](#) [67000-004LF](#)
[006207341915000+](#) [DS1020-19RT1D](#) [67000-003LF](#) [67000-011LF](#) [67000-016LF](#) [HFW14R-2STE9LF](#) [SFV32R-2STBE9HLF](#) [SFW12R-](#)
[5STE9LF](#) [SFW18R-1STAE9LF](#) [SFW4R-5STE9LF](#) [52807-0430](#) [046283021002868+](#) [THD1015-8CL-SN](#) [67000-006LF](#) [502250-8027](#)
[104267-9617](#) [66987-011LF](#) [AYF362535](#) [F0501-T-50-20T-R](#) [HFW8S-2STAE1HLF](#) [67000-008LF](#) [67000-012LF](#) [ECC576069EU](#) [F1002-B-](#)
[20-20T-R](#) [HFW15S-2STAE1HLF](#) [5019511030](#)