


0.50mm Pitch FFC/FPC – F31W/F31Z/F314/F336 Series

VERTICAL ZIF FLEX CONNECTOR

F31W/F31Z/F314/F336 series are 0.50mm pitch vertical ZIF flex connectors with slider mechanism and surface mount termination. These connectors feature a height of 4.25mm and are offered in 4 to 60 contacts. These series feature a cable thickness of 0.30mm and provide enhanced durability of 30 mating cycles. The connectors come with a robust design and prevent solder and flux wicking. These are ideal for automotive, data, industrial, communication, consumer and medical applications.

- Easy to operate and strong FPC/FFC retention makes it vibration-proof
- Ensures high solderability and high durability

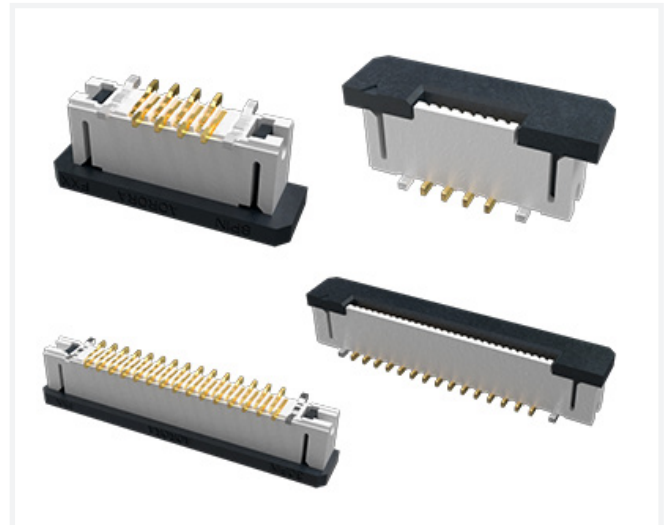

TARGET MARKETS



FEATURES

- ZIF (Zero Insertion Force) mechanism
- Slider mechanism
- Design against solder and flux wicking
- High-temperature thermoplastic housing
- 4 to 60 positions available
- Lead and halogen-free

BENEFITS

- Absence of frictional mating wear results in high mating cycle life
- Easy to operate and strong FPC/FFC retention makes it vibration-proof
- Ensures high solderability
- Wide operating temperature range of -40°C to $+105^{\circ}\text{C}$
- Comprehensive range to satisfy different customer requirements
- Meets environmental, health and safety requirements

TECHNICAL INFORMATION

MATERIAL

- Housing: LCP, natural color (UL94V-0)
- Slider: PA9T, black color (UL94V-0)
- Contact Terminal: Phosphor bronze, T=0.20mm
- Anchor-plate: Brass, T=0.40mm
- Mylar: T=0.10mm, thermostable, yellow color

MECHANICAL PERFORMANCE

- FFC/FPC Retention Force: 0.1~2.25kgf/min. (initial), after 30 cycles: 0.06~2.08kgf/min.
- Terminal Retention Force: 100gf/terminal min.
- Anchor-plate Retention Force: 400gf/plate min.
- Durability: 30 mating cycles

ELECTRICAL PERFORMANCE

- Voltage Rating: 50V AC/DC
- Current Rating: 0.5A
- Contact Resistance: 30MΩ max.
- Insulation Resistance: 500MΩ min.
- Dielectric Withstanding Voltage: No short or breakdown after 500V AC, 2mA, 1min.

PACKAGING

- Tape & Reel

APPROVALS AND CERTIFICATIONS

- UL file number E106764
- RoHS compliant

SPECIFICATION

- Aorora Product Specification: IS.EQC.012

ENVIRONMENTAL

- Operating Temperature Range: -40°C to +105°C

TARGET MARKETS/APPLICATIONS



Car Multimedia
Car Navigation
Dashboard
PND



Base Station
Power
Switches



Notebook
Tables
Wearables
Gaming
DSC
LCD & PDP TV



Router
Server
ODD
HDD




Sensing element
Monitoring camera
Human Machine Interface
Industrial PC
Robotics



Ultrasonic
Patient Monitor
MRI
CT
Infusion Pump

PART NUMBER SELECTOR

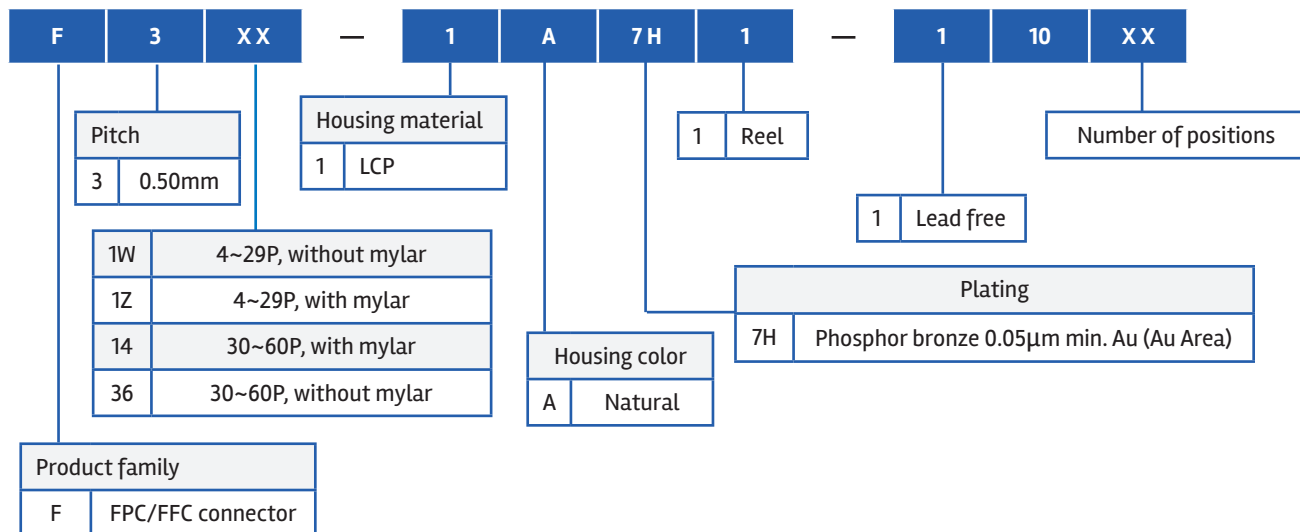

AORORAF31W31Z314336012EA4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0015917161](#) [0022155065](#) [57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [71.350.2428.0](#) [733-134](#) [733-162](#) [760-3052](#) [MHR-64-VUAL](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#) [803-43-024-10-001000](#) [803-93-012-10-001000](#) [8-1437020-4](#) [819-22-004-30-001101](#) [820-22-006-30-001101](#)
[821-22-002-10-001101](#)