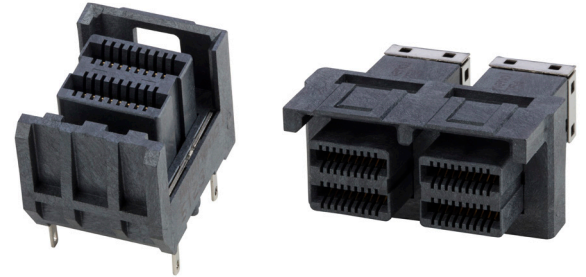


Mini-SAS HD Internal Connectors – G40H Series

NEXT-GENERATION SAS STORAGE INTERFACE

Amphenol Mini-SAS High Density connector system is the next generation SAS system that provides faster data rates and more bandwidth. It provides double the port density of current Mini-SAS connectors with 1x1, 1x2 and 1x4 port options.

- Fully compliant with SFF-8643 specification
- Meets SAS 3.0 12Gb/s
- 85Ω solution compliant with PCIe protocol
- Wafer design delivers better signal integrity
- Supports projected SAS 4.0 performance

NEW


TARGET MARKETS



FEATURES

- Complies with SFF8643 specification
- 0.75mm pitch connector system
- Meets SAS 3.0, 12Gb/s electrical performance
- Improved signal integrity and minimized crosstalk
- Eliminates need for mechanical key
- Pinouts map easily with existing Mini-SAS product
- Backward compatible with Mini-SAS
- Press-fit termination

BENEFITS

- Supports server and storage applications
- Suitable for high density applications
- Meets industry standards
- Lowers system latency and better system performance
- Easy to mate and unmate
- Supports SAS 2.1 performance as well
- Integrated press-fit pin design provides easy placement on PCB

TECHNICAL INFORMATION

MATERIAL

- Housing: High Temperature Thermoplastic, UL 94V-0
- Contact Base Metal: Copper alloy
- Under-Plating: Nickel plating overall
- Shell: Stainless Steel

MECHANICAL PERFORMANCE

- Durability: 250 mating cycles
- Mating Force: 50N max.
- Unmating Force: 10N max.

ELECTRICAL PERFORMANCE

- Current Rating: 0.5A max. per contact
- Voltage Rating: 30V AC/ DC max.
- Dielectric Withstanding Voltage: 300V DC
- Insulation Resistance: 1000m Ω min.
- Differential Impedance: 100 Ω \pm 10 Ω

ENVIRONMENTAL

- Humidity: 24 cycles between 25°C/ 80%RH
- Temperature Life: EIA-364-17, 105°C for 336 hours
- Thermal Shock: -55°C to 85°C, 10 cycles

PACKAGING

- Tray/Tape and Reel available upon request

SPECIFICATION

- Amphenol Product Specification: PS-7460

APPROVALS & CERTIFICATION

- UL

TARGET MARKETS/APPLICATIONS



Router
Telecommunication




Networking
Servers
Storage




Test and Measurement Equipment
Instrumentation and Medical

PART NUMBER SELECTOR – RIGHT ANGLE

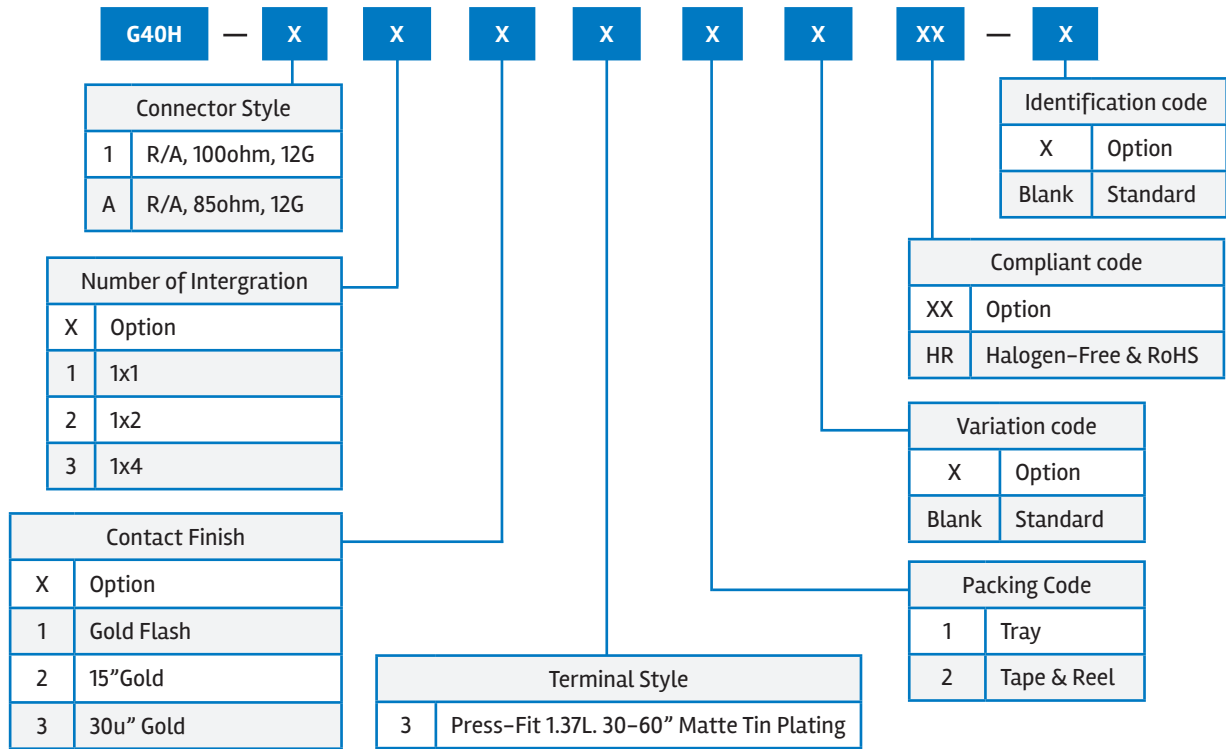

PART NUMBER SELECTOR – VERTICAL

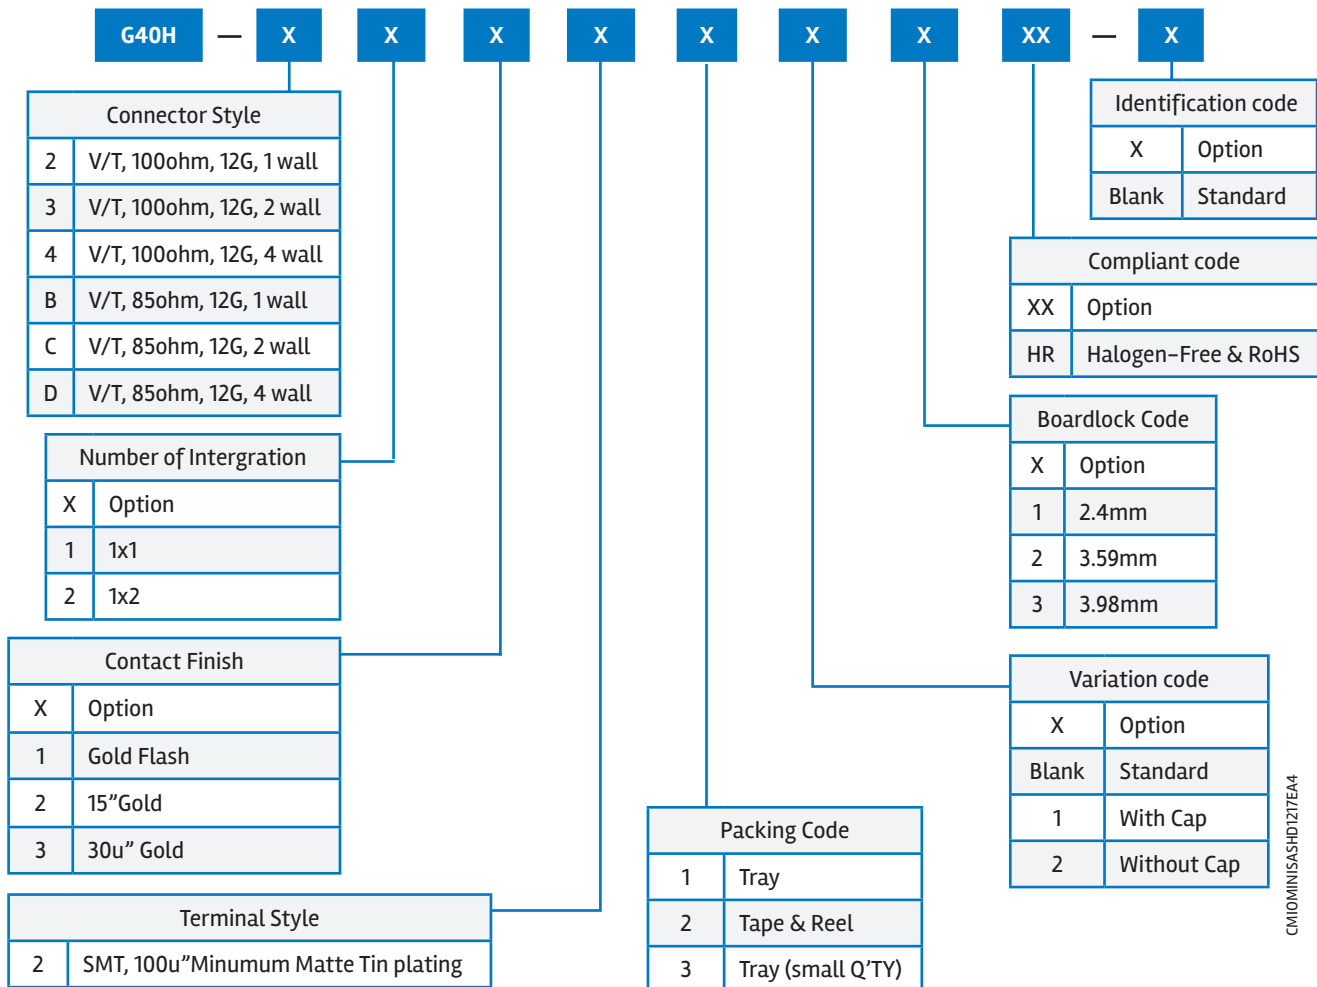

CM10MINISASHD127EA4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[571763P](#) [58098-0628](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [PCR-E36PM](#) [PCS-XE26MA+](#) [G38A71314B](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [U90B2054081210](#) [UE86K842720321](#) [38113800006](#) [DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [0709821002](#) [DX40-20P\(55\)](#) [5554841-1](#) [MS3474W18-8P-LC*](#) [SM3106F14S-7S-LC](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [747360449](#) [10099439-003C-TRLF](#) [10137239-0021LF](#)