

DFR Series Flat Ribbon D-Sub Connectors

CHARACTERISTICS

Specifications

- Connectors according to MIL C24308 Standard Interface
- UL File: E232356

Materials and Platings	
Shells	Steel, Tin over Nickel
Insulator	Glass-filled thermoplastic, UL 94V-0
Contacts	Brass, selected gold in mating area; 2.54µm (100µ") min. tin on termination area over 1.27µm (50µ") min. nickel
Rear insert	Brass, 1.524µm (60u") min. nickel plated
Screwlock	Brass, 1.524µm (60u") min. nickel plated

Electrical Data	
Current rating	3A
Voltage rating	250V AC/rms 60Hz
Withstanding voltage	1000V AC/rms 60Hz for one minute
Insulation resistance	1000MΩ
Contact resistance	20mΩ max

Climatic Data	
Operating temperature	-25°C to +85°C

Mechanical Data		
Single contact insertion force	0.34kg(0.748lb) max	
Single contact withdrawal force	0.02kg(0.044) min	
Mating and unmating force		
Unit: kg (lb)		
	Mate (max)	Unmate (min)
9 (size E)	3.06(6.75)	0.36(0.79)
15 (size A)	5.10(11.24)	0.46(1.01)
25 (size B)	8.47(18.67)	0.8(1.76)
37 (size C)	12.55(27.67)	1.12(2.47)
Standard plating thicknesses	<ul style="list-style-type: none"> • gold flash • 0.38µm (15µ") gold • 0.76 µm (30µ") gold 	

TARGET MARKETS/APPLICATIONS



Telecommunications



Industrial



D-SUB CONNECTORS – STAMPED AND FORMED CONTACTS


Amphenol offers a full range of D-Sub connectors from stamped and formed pin to screw machined pin with various termination and mounting options.

DFR series feature a special contact design which allows usage of standard 1.27mm flat cable. It works with all standard D-Sub hoods and is suitable for AWG size 28.

DFR series is a reliable and compact solution for modern peripheral equipment, which can be used in telecom, commercial, industrial and any industry standard applications.


- DFR stands for Flat Ribbon Cable
- With front metal shell or all plastic available for clear hole mounting option only
- With cable strain relief
- Protective hoods available
- Termination tooling available

OVERALL DIMENSION

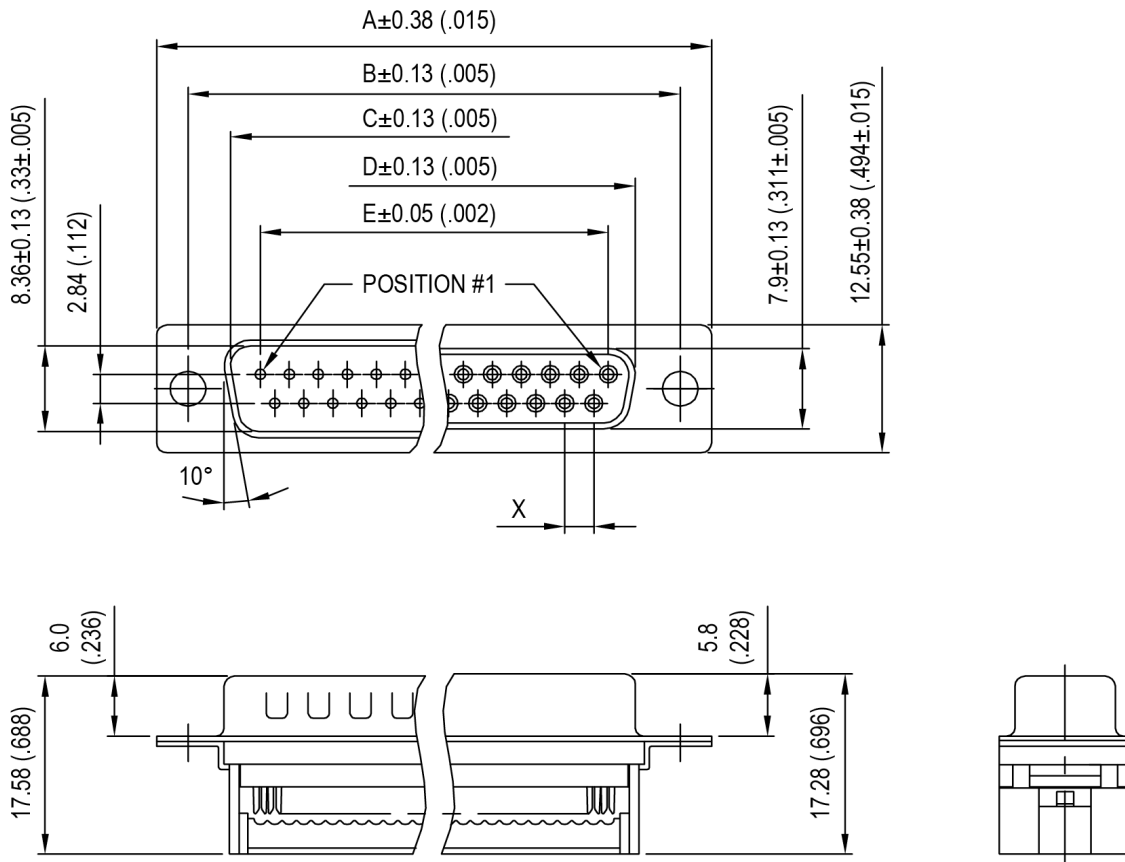


No. of Contacts	Dimensions mm (inch)						
	A	B	C	D	E	X	G
9	30.81 (1.21)	24.99 (.984)	16.92 (.666)	16.33 (.643)	11.08 (.465)	2.77	3.3 (.130)
15	39.20 (1.54)	33.30 (1.31)	25.25 (.994)	24.70 (.970)	19.39 (.763)	2.77	
25	53.04 (2.09)	47.04 (1.85)	38.96 (1.53)	38.40 (1.51)	33.24 (1.31)	2.77	
37	69.40 (2.73)	63.50 (2.50)	55.42 (2.18)	54.80 (2.16)	49.86 (1.96)	2.77	

STRAIN RELIEF

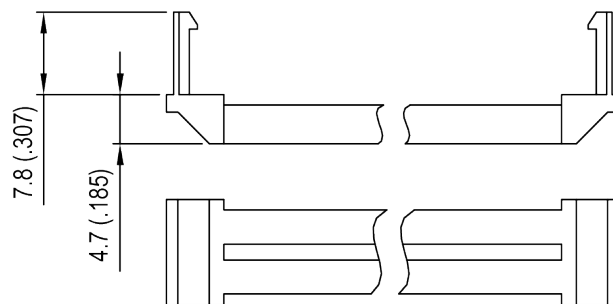


TECHNICAL DATA


Panel mounting option



Clear hole $\phi 3.05$ mm
no digit

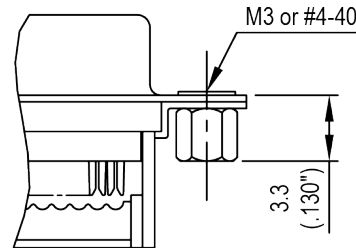


Riveted rear nut
B/D

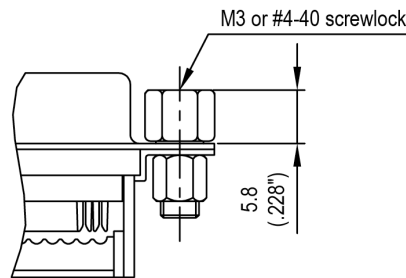


Riveted rear nut with removable front female screwlock
A/C

Tool

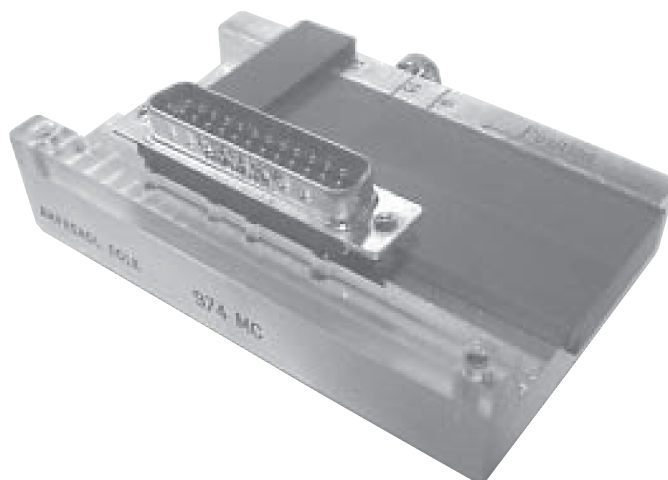

Support for hand termination tool:
974MC

PART NUMBER SELECTOR

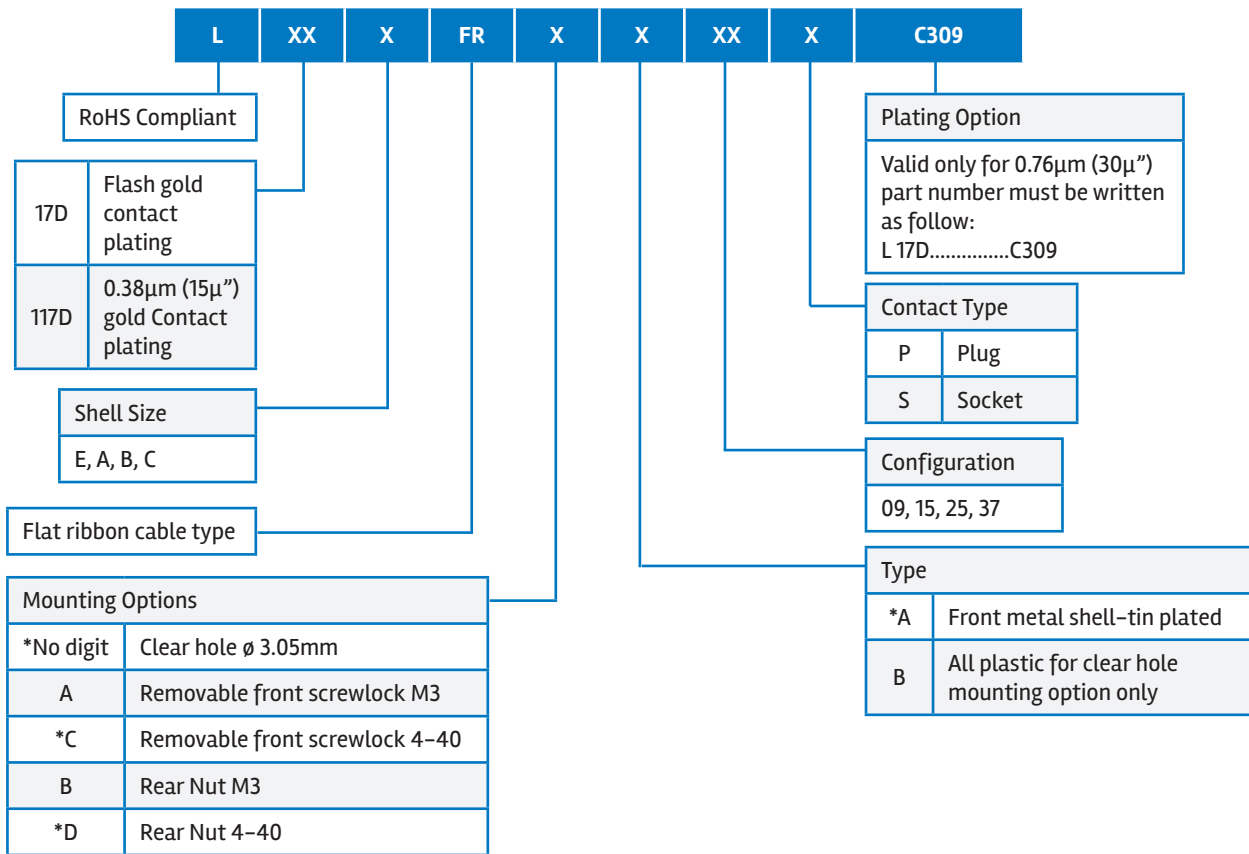

*Standard options.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Standard Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[56F706-005-LI](#) [56F711-015](#) [LV242999-142T12](#) [015-0341-000](#) [015-0372-005](#) [015-0372-008](#) [015-8755-001](#) [020419-0104](#) [012-0467-000](#)
[012-9507-034](#) [012-9507-114](#) [020745-0008](#) [609-25P](#) [CT2-18-11PCAU](#) [CT6-10SL-3SC](#) [CT6-10SL-4SC](#) [CT6-14S-2SC](#) [CT6E14SA7SC](#)
[CT6N10SL-4SSA34](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [6STD09PCM99B70X](#) [6STD09SCM99B30X](#)
[6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCT99S40X](#) [6STF09PCM05B70X](#) [7-135760-9](#) [MC11E-10-6SN](#) [747552-3](#) [MD1-21PS](#)
[MDM-15SCBRM7-F222](#) [MDM96517-699](#) [MDM96521-744](#) [MDVB1-21SL1](#) [MIK0-1-7SH003](#) [MIKQ6-7SH076](#) [MIKQ7-7PH077](#) [MIKQ7-](#)
[7PH11](#) [MIKQ7-7PH32](#) [MJSV-28SL61](#) [MKJ4A1F14-55S](#) [8-135760-3](#) [8STD09PCM99B30X](#) [PG-KV/PV-16-GROM-SEALING](#) [GDA15P](#)
[GDAY15PB](#) [980-0000-170](#) [980-0000-171](#)