
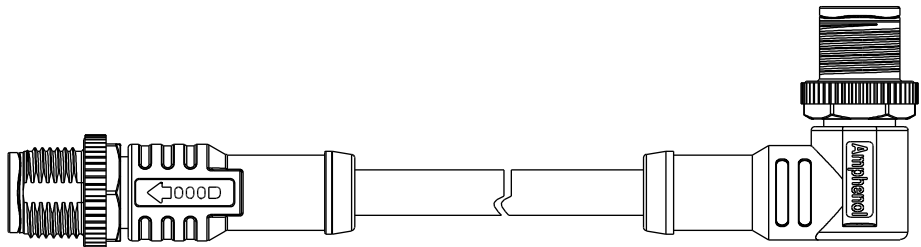
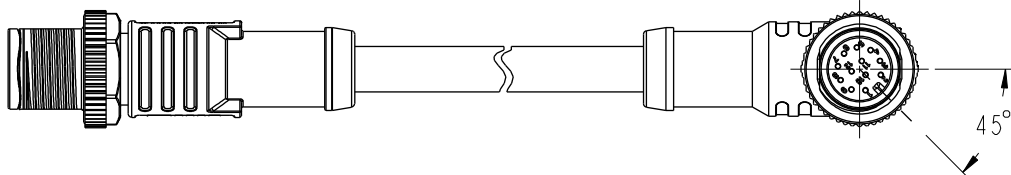


REV.	DESCRIPTION

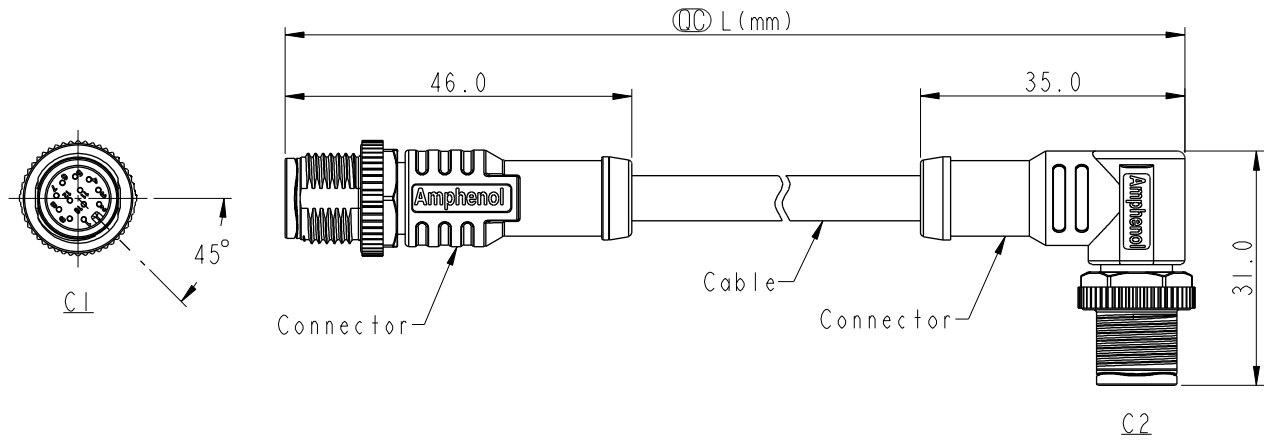

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP68, IP69K.
 - * Connector: PU+GF, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Zinc Alloy, Nickel Plated.
 - * Outer Mold: PU, Black.
 - * Cable: (B) UL20549, PUR Jacket, Black.
(D) UL2517, PVC Jacket, Black.
 - * Rated Voltage: 3 & 4Pin 250V dc. or ac.
5Pin 60V dc. or ac.
6~12Pin 30V dc. or ac.
 - * Rated Current: 3~5Pin 4A
6~8Pin 2A
10~12Pin 1.5A
 - * Cable Length Tolerance: 0.5±20mm
01±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE	M12 A-Code Double Ended		
TOLERANCE	±0.5 mm	SCALE	1:2	SIZE	A4
		SHEET	1	OF	3
REV.	A	WC-REV.	A.1	\varnothing	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Vicky	2018-12-05
DWG NO	CHECKED BY	DATE
M12AXXML-12AMR-SXXXX	Rita	2018-12-05
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-05


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

12P	PVC	6.0	26	M12A12ML-12AMR-SDXXX
10P				M12A10ML-12AMR-SDXXX
8P		5.5	24	M12A08ML-12AMR-SDXXX
6P				M12A06ML-12AMR-SDXXX
5P		5.1	22	M12A05ML-12AMR-SDXXX
4P				M12A04ML-12AMR-SDXXX
3P	4.5		M12A03ML-12AMR-SDXXX	
12P	PUR	6.0	26	M12A12ML-12AMR-SBXXX
10P				M12A10ML-12AMR-SBXXX
8P		4.8	24	M12A08ML-12AMR-SBXXX
6P				M12A06ML-12AMR-SBXXX
5P		4.4	22	M12A05ML-12AMR-SBXXX
4P				M12A04ML-12AMR-SBXXX
3P	3.8		M12A03ML-12AMR-SBXXX	
Contacts	Cable Jacket	Cable OD	AWG	Item No.

M 12A XX M L - 12A M R - S X XXX

- 12A: A-Code
- 03: 3Pin
- 04: 4Pin
- 05: 5Pin
- 06: 6Pin
- 08: 8Pin
- 10: 10Pin
- 12: 12Pin
- M: Male Connector(公座)
- L: Straight(180°線端)
- XXX: 0.5~99Meters
- A05: 0.5 Meter
- 001: 1 Meter
- 002: 2 Meters
- :
- 099: 99 Meters
- B: PUR UL20549 Cable,Black(PUR黑色外被線材)
- D: PVC UL2517 Cable,Black(PVC黑色外被線材)
- S: Screw(螺紋式)
- R: Right(90°線端)
- M: Male Connector(公座)
- 12A: A-Code

UNIT:mm		TITLE M12 A-Code Double Ended			<h2 style="margin: 0;">Amphenol LTW</h2> <p style="margin: 0;">安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Vicky	DATE 2018-12-05
		SCALE 1:2 SIZE A4 SHEET 2 OF 3				DWG NO M12AXXML-12AMR-SXXXX	CHECKED BY Rita	DATE 2018-12-05
		REV. A WC-REV. A.1 (QC): Inspection item				CUSTOMER ALTW	APPROVED BY Max	DATE 2018-12-05

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialised Cables category](#):

Click to view products by [Amphenol manufacturer](#):

Other Similar products are found below :

[GP-IE515546DS-002](#) [7810SB-010-1000](#) [96CB-L2020PIB2](#) [1200740161](#) [R88ACAKA0015SRE](#) [R88ACAWL005SDE](#) [R88ACRGD0R3C](#)
[1300660042](#) [1300660201](#) [1971465-2](#) [22733-8](#) [2R7004A20F060](#) [SSL009PC2DC012N](#) [FC2A-KC6C](#) [CCSFCBF2](#) [R7ACAB005S](#)
[XS2WM12PUR4SA10M](#) [XS2WM12PVC4SA10M](#) [05AU05](#) [UCABLE](#) [10114734-2010LF](#) [XW2Z010H3](#) [XW2Z010H1](#) [5-1589827-8](#) [5-](#)
[1589827-4](#) [861084-1](#) [XW2Z200JB24](#) [5-1589956-8](#) [CR4000A76M020](#) [1201140211](#) [1300140039](#) [CR4000A76M005](#) [CR4006A76M005](#)
[10077488-N0550FDLF](#) [XW2ZRY150C](#) [I4JPBJLUXX100](#) [I4JPBJLUXX50](#) [CM06](#) [CM06W](#) [POE004](#) [0243 009 05](#) [0243 009 20](#) [0243 009 36](#)
[0243 009 26](#) [0243 009 33](#) [0243 009 23](#) [0243 009 01](#) [0243 009 30](#) [0243 008 05](#) [0243 008 20](#)