


SFT150-6401

NOTES

1. **MATING:**
Interface dimensions per Solitron/Microwave MD-154, SSMA (40GHz) and MD-158, SMA (40GHz).
2. **MATERIALS:**
Body and
Coupling Nut: _____ Stainless Steel per AMS-5640, Type 303, Cond. A.
Lock Ring & Contact: _____ Beryllium Copper per QQ-C-530, Cond. H.T., Alloy 173.
Insulator: _____ Teflon per Mil-P-19468 and L-P-403, Type I.
Gasket: _____ Silicone Rubber per ZZ-R-765, Class IIB, Grade 50-60.
3. **FINISH:**
Body and
Coupling Nut: _____ Passivate per QQ-P-35A, Type I.
Contact: _____ Gold per Mil-G-45204, Type II, Grade C, Class 2; over Copper per Mil-C-14550, Class 4.
4. Center Contact epoxy captivated.
5. Insulator mechanically captivated.

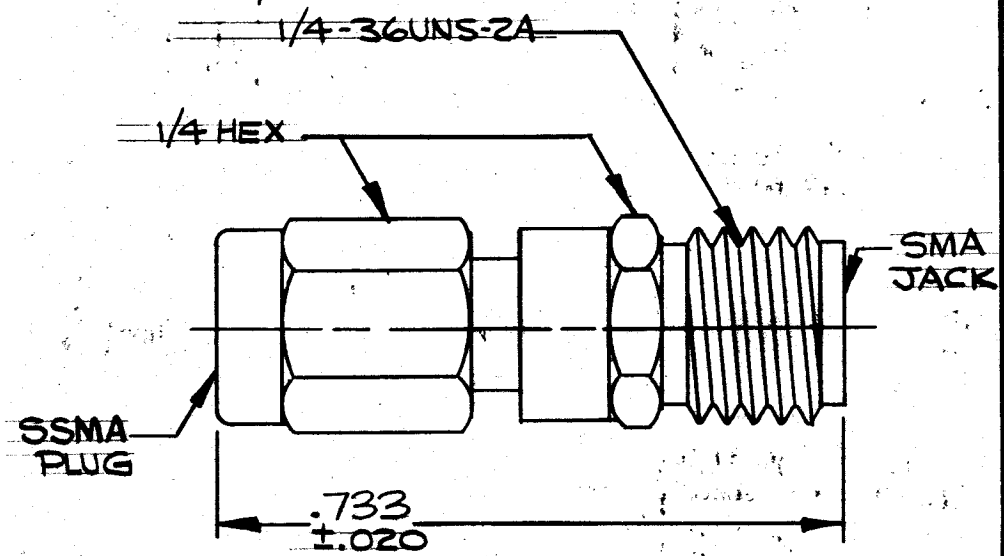

SYM	DESCRIPTION	DATE	APPR.
-	REL. F- 8584	10/81	DGG
A	REV. F- 8845	3/82	DGG

UNLESS OTHERWISE SPECIFIED
 1. ALL DIMENSIONS ARE AFTER PLATING
 2. BREAK ALL CORNERS & EDGES .005 R MAX.
 3. CHAMFER 1ST & LAST THREADS 45°
 4. SURFACE ROUGHNESS 63 MIL-STD-10
 5. DIAMETERS ON COMMON CENTERS TO BE CONCENTRIC WITHIN _____ T.I.R.
 6. REMOVE ALL BURRS

DIMENSIONS ARE IN INCHES
 TOLERANCES

DECIMALS	FRACTIONAL	ANGULAR
X ± .030		X' ± 1'0"
.XX ± .015	± 1/64	
.XXX ± .005		X'X' ± 15'

DRAWN -1 DATE 10-1-81
 CHECKED _____ DATE _____
 APPROVED DGG DATE 10/2/81

SOLITRON/MICROWAVE
 PORT SALERNO, FLORIDA

MATERIAL _____

FINISH _____ AREA _____

SCALE _____ CODE IDENT. NO. **95077** SIZE **A**

REF. **ENGINEERING DATA DRAWING**

TITLE **SMA (40 GHz) JACK SSMA (40 GHz) PLUG ADAPTER**

DRAWING NO. **SFT150-6401 SHT 1 OF 2**

S/M DESIGN STANDARDS

DRAWING NO.
SF1150-6401

REQUIREMENTS

RATINGS

Nominal Impedance (ohms)	50	
Frequency Range (ghz)	DC-40GHZ	
Voltage Rating (max. vrms)	250	
Temperature Rating (degrees centigrade)	-65° to +165°	
VSWR (max.)	1.04 + .007 xFGHZ	
Insertion Loss (dB max.)	.05 x \sqrt{FGHZ}	
RF Leakage (min. dB down)	100 dB-FGHZ	
RF High Potential (max. vrms)	500 at 5MHZ	
Dielectric Withstanding Voltage (max. vrms)	750	
Insulation Resistance (min. megohms)	5000	
Contact Resistance:	SMA	SSMA
Center Contact (max. milliohms)	3.0	4.0
Outer Contact (max. milliohms)	2.0	1.0
Center Contact Axial Forces:	SMA	SSMA
Insertion (max. ounces)	48.0	N/A
Withdrawal (min. ounces)	2.0	
Connector Durability (min. cycles)	500	
Connector Engagement & Disengagement (max. inch lbs.)	2.0	

REQUIREMENTS

RATINGS

Vibration	MIL-STD-202 Method 204 Cond. D (20G's)
Shock	MIL-STD-202 Method 213 Cond. I (100G's)
Temperature Cycling	MIL-STD-202 Method 102 - Cond. C (-65°C to + 200°C)
Corrosion	MIL-STD-202 Method 101 Cond. B (48 Hrs.)
Moisture Resistance	MIL-STD-202 Method 106 Less Step 7b
Barometric Pressure (Altitude)	MIL-STD-202 Method 105 - Cond. C (70,000 ft) (190 vrms)
Captivation Center Contact (Min. Axial Force) (Min. Radial Torque)	6.0 lbs. 2 in. oz.

REMARKS: 1) Recommended Mating Torque: SMA 7-10 inch pounds
SSMA 6-8 inch pounds

TITLE: SMA (40GHz) JACK, SSMA (40GHz)
PLUG ADAPTER

SOLITRON/MICROWAVE
PORT SALERNO, FLORIDA

SHT. 2 of 2

DRAWING NO.
SF1150-6401

REV.
A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF MIL Spec Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[M39012/61-3001](#) [GTS01-16-10S-116](#) [CTVP00RW-25-35S\(506\)](#) [93-150752-06S](#) [SMA6251A1-3GT50G-50B](#) [UG-89/U\(40\)](#) [M39012/27-0018](#)
[M39012/27-0101](#) [M39012/01-0005](#) [SMA1111A1-3GT50G-1-50](#) [625-MAGNET](#) [M39012/28-0010](#) [M39012/55B3022](#) [M39012/26-0018](#)
[M39012/26-0022](#) [M39012/26-0225](#) [M55339/47-30001](#) [SMA1111A2-3GT50G-5-50](#) [SMA1112A5-3GT50G-5-50](#) [SMA1112A6-3GT50G-1-50](#)
[M39012/79-3108](#) [M39012/79B3001](#) [M39012/80-3107](#) [M39012/55-3030](#) [M39012/56-3126](#) [M55339/02-30001](#) [M55339/28-30001](#)
[M55339/28-30002](#) [M55339/29-30001](#) [M55339/31-30001](#) [UG-29A/U](#) [SMA2071A1-3GT50G-50](#) [1102-0003](#) [M39012/16-0101](#) [M39012/26-0011](#) [M39012/26-0012](#) [M39012/26B0006](#) [M39012/26B0015](#) [M39012/28-0022](#) [M39012/30-0101](#) [M39012/31-0001](#) [M39012/31-0002](#)
[M39012/33-0001](#) [M39012/39-0501](#) [M39012/55-3006](#) [M39012/55-3007](#) [M39012/55-3009](#) [M39012/55-3026](#) [M39012/55-3028](#) [M39012/55-3109](#)