


| REVISIONS |     |                        |             |       |       |
|-----------|-----|------------------------|-------------|-------|-------|
| REV       | ECO | DESCRIPTION            | DATE        | BY    | APPR  |
| B1        | -   | RELEASE NEW DWG FORMAT | Jul.15,2014 | Tod   | Tommy |
| B2        | -   | UPDATE THE DURABILITY  | Jun.27,2015 | Drack | Tommy |
| B3        | -   | UPDATED                | 08DEC15     | MRF   | Tommy |

|   |               | Cable OD Range |
|---|---------------|----------------|
| 1 | MA3TNxxx00-S1 | 4.5-7.5 mm     |
| 2 | MA3TNxxx00-S2 | 7.5-11.0 mm    |
| 3 | MA3TNxxx00-S3 | 11.0-15.0 mm   |

| REV      | ECO         | DESCRIPTION   | DATE                               | BY | APPR |
|----------|-------------|---------------|------------------------------------|----|------|
| -        |             | MA3TNP1900-S3 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 27   |
| -        |             | MA3TNP1900-S2 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 26   |
| -        |             | MA3TNP1900-S1 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 25   |
| -        |             | MA3TNE1900-S3 | M23, RECP, BULKHEAD, 19POS, E TYPE |    | 24   |
| -        |             | MA3TNE1900-S2 | M23, RECP, BULKHEAD, 19POS, E TYPE |    | 23   |
| -        |             | MA3TNE1900-S1 | M23, RECP, BULKHEAD, 19POS, E TYPE |    | 22   |
| -        |             | MA3TNP1700-S3 | M23, RECP, BULKHEAD, 17POS, P TYPE |    | 21   |
| -        |             | MA3TNP1700-S2 | M23, RECP, BULKHEAD, 17POS, P TYPE |    | 20   |
| -        |             | MA3TNP1700-S1 | M23, RECP, BULKHEAD, 17POS, P TYPE |    | 19   |
| -        |             | MA3TNE1700-S3 | M23, RECP, BULKHEAD, 17POS, E TYPE |    | 18   |
| -        |             | MA3TNE1700-S2 | M23, RECP, BULKHEAD, 17POS, E TYPE |    | 17   |
| -        |             | MA3TNE1700-S1 | M23, RECP, BULKHEAD, 17POS, E TYPE |    | 16   |
| -        |             | MA3TNP1600-S3 | M23, RECP, BULKHEAD, 16POS, P TYPE |    | 15   |
| -        |             | MA3TNP1600-S2 | M23, RECP, BULKHEAD, 16POS, P TYPE |    | 14   |
| -        |             | MA3TNP1600-S1 | M23, RECP, BULKHEAD, 16POS, P TYPE |    | 13   |
| -        |             | MA3TNE1600-S3 | M23, RECP, BULKHEAD, 16POS, E TYPE |    | 12   |
| -        |             | MA3TNE1600-S2 | M23, RECP, BULKHEAD, 16POS, E TYPE |    | 11   |
| -        |             | MA3TNE1600-S1 | M23, RECP, BULKHEAD, 16POS, E TYPE |    | 10   |
| -        |             | MA3TNP1200-S3 | M23, RECP, BULKHEAD, 12POS, P TYPE |    | 9    |
| -        |             | MA3TNP1200-S2 | M23, RECP, BULKHEAD, 12POS, P TYPE |    | 8    |
| -        |             | MA3TNP1200-S1 | M23, RECP, BULKHEAD, 12POS, P TYPE |    | 7    |
| -        |             | MA3TNE1200-S3 | M23, RECP, BULKHEAD, 12POS, E TYPE |    | 6    |
| -        |             | MA3TNE1200-S2 | M23, RECP, BULKHEAD, 12POS, E TYPE |    | 5    |
| -        |             | MA3TNE1200-S1 | M23, RECP, BULKHEAD, 12POS, E TYPE |    | 4    |
| -        |             | MA3TNP1900-S3 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 3    |
| -        |             | MA3TNP1900-S2 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 2    |
| -        |             | MA3TNP1900-S1 | M23, RECP, BULKHEAD, 19POS, P TYPE |    | 1    |
| QUANTITY | PART NUMBER | DESCRIPTION   | ITEM                               |    |      |

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:  
INSULATION INSERT: PA66,UL94 V0  
SEAL: VITON  
HOUSING BODY: ZINC DIE CAST, NICKEL PLATED
- SPECIFICATIONS:  
2.1 CURRENT RATING: 10 AMPS - 12 POSITION  
9 AMPS - 16 POSITION  
9 AMPS - 17 POSITION  
7 AMPS - 19 POSITION  
2.2 VOLTAGE RATING: 160V AC/DC - 12 POSITION  
125V AC/DC - 16 POSITION  
125V AC/DC - 17 POSITION  
63V AC/DC - 19 POSITION  
2.3 OPERATING TEMPERATURE: -20°C TO +130°C  
2.4 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 2500 VOLTS AC.  
2.5 DEGREE OF PROTECTION: IP67 ( MATED CONDITION )  
2.6 DEGREE OF POLLUTION: 3 PER UL840  
2.7 OVERVOLTAGE CATEGORY: III PER UL840  
2.8 MATING CYCLE DURABILITY: >500 CYCLES  
2.9 RoHS COMPLIANT
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

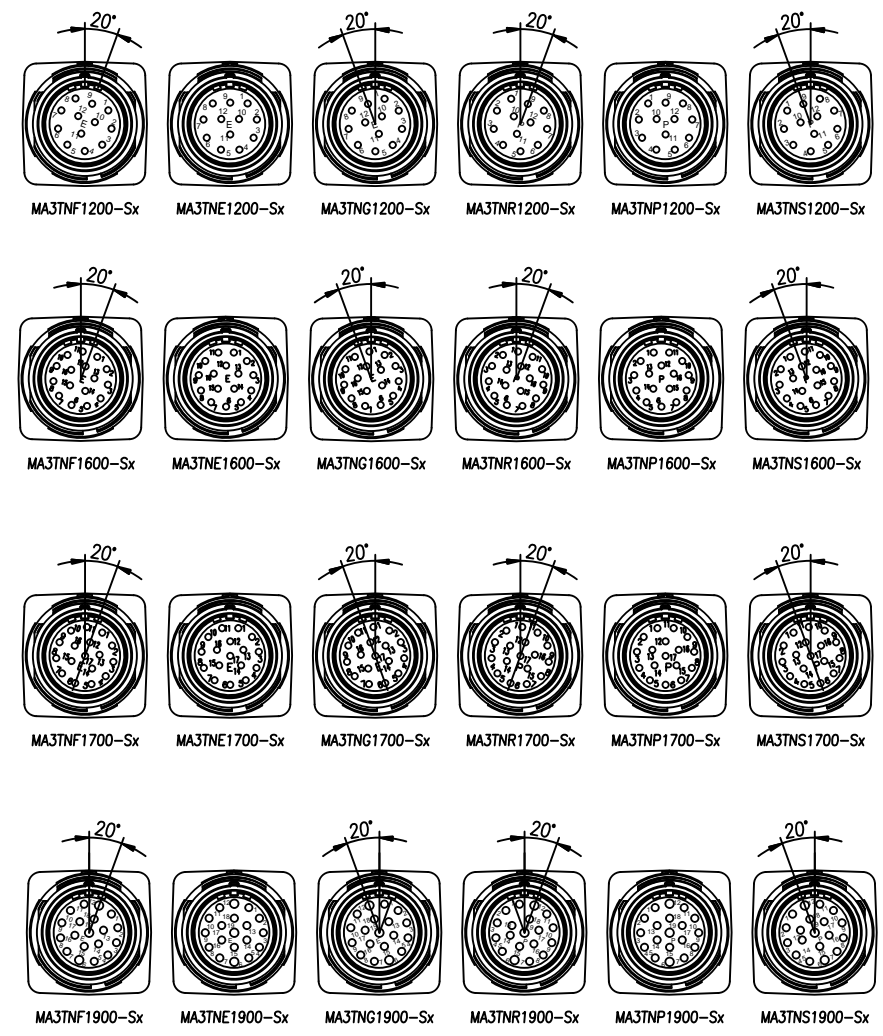

| MATERIALS LIST                       |      |  |                              |      |      |         |          |   |    |               |    |
|--------------------------------------|------|--|------------------------------|------|------|---------|----------|---|----|---------------|----|
| UNLESS OTHERWISE SPECIFIED           |      | SIGNATURES   | DATE                         |      |      |         |          |   |    |               |    |
| 1) All dimensions are in metric(mm). |      | DRAWN: Drack   | Jun.27,2015                  |      |      |         |          |   |    |               |    |
| 2) Tolerances are as follows:        |      | CHECKED:   |                              |      |      |         |          |   |    |               |    |
| 1 PL DEC ±0.30                       |      | ENGINEER:  |                              |      |      |         |          |   |    |               |    |
| 2 PL DEC ±0.15                       |      | APPROVAL:  |                              |      |      |         |          |   |    |               |    |
| 3 PL DEC ±0.08                       |      | CUSTOMER:  |                              |      |      |         |          |   |    |               |    |
| 3) Note reference = $\Delta$         |      | THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS. |                              |      |      |         |          |   |    |               |    |
| MATERIAL SPECIFICATIONS:             |      | M23, RECP, BULKHEAD, THREADED  |                              |      |      |         |          |   |    |               |    |
| PROCESS SPECIFICATIONS:              |      | <table border="1"> <tr> <td>SIZE</td> <td>TYPE</td> <td>DWG NO.</td> <td>REVISION</td> </tr> <tr> <td>B</td> <td>C-</td> <td>MA3TNxxx00-Sx</td> <td>B3</td> </tr> </table>   |                              | SIZE | TYPE | DWG NO. | REVISION | B | C- | MA3TNxxx00-Sx | B3 |
| SIZE                                 | TYPE | DWG NO.  | REVISION                     |      |      |         |          |   |    |               |    |
| B                                    | C-   | MA3TNxxx00-Sx  | B3                           |      |      |         |          |   |    |               |    |
| NEXT ASSY:                           |      | SCALE: NONE  | C-MA3TNxxx00-Sx SHEET 1 OF 1 |      |      |         |          |   |    |               |    |

TITLE: M23, RECP, BULKHEAD, THREADED  
DWG NO.: MA3TNxxx00-Sx  
REV: B3  
SH: 1  
OF: 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Circular Connector](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#) [6280-7SG-3DC](#) [6280-7SG-522](#) [6282-2SG-321](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [680-SMG](#) [681-PMG](#) [CXC3106A1811S](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [CXS3106A14S6S](#) [D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#) [7251-5SG-300](#) [7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [7282-8PG-3ES](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-10P](#) [75-190614-07S](#) [75-214636-52P](#)