1. MATERIAL:

REV

A1

ECO

INSULATION INSERT: PA66,UL94 V0 SEAL: VITON, EPDM

HOUSING BODY: ZINC DIE CAST, NICKEL PLATED COUPLING NUT: ZINC DIE CAST, NICKEL PLATED CONTACT: COPPER ALLOY, GOLD PLATED

2. SPECIFICATIONS:


- 2.1 CURRENT RATING: 9 AMPS
- 2.2 VOLTAGE RATING: 125 V AC/DC
- 2.3 CONTACT RESISTANCE: <5 mOHMS
- 2.4 OPERATING TEMPERATURE: -20°C TO +130°C 2.5 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2
- MILLIAMPS CURRENT LEAKAGE @ 2500 VOLTS AC. 2.6 DEGREE OF PROTECTION: IP67 (MATED CONDITION)


REVISIONS

FIRST RELEASE


- 2.7 DEGREE OF POLLUTION: 3 PER UL840
- 2.8 OVERVOLTAGE CATEGORY: III PER UL840
- 2.9 MATING CYCLE DURABILITY: >500 CYCLES
- 2.10 RoHS COMPLIANT
- 3. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.


Iten	Part number	Connector P/N	Cable OD Range
1	MA5CAE1700S-S1-KIT	MA5CAE1700-S1	4.5~7.5 mm
2	MA5CAE1700S-S2-KIT	MA5CAE1700-S2	7.5~11.0 mm
3	MA5CAE1700S-S3-KIT	MA5CAE1700-S3	11.0~15.0 mm







E type, Normal Key



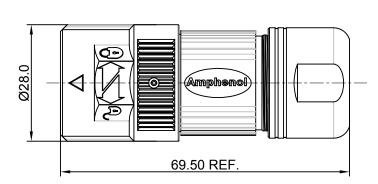

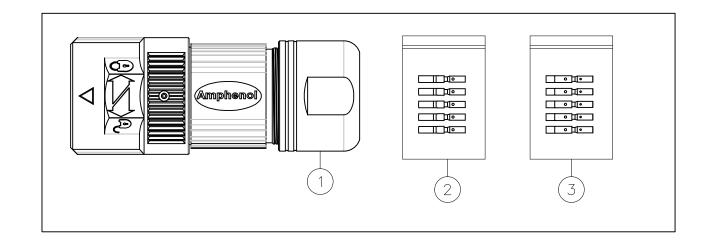

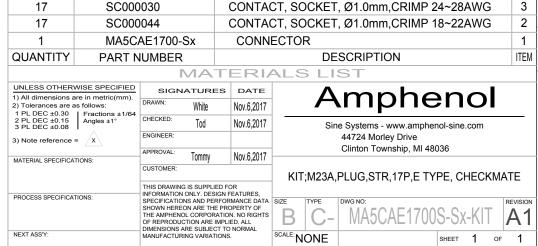

유

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Circular Metric Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

600X518037X 6STD15PCR99B70A 8R4000A16M020 8R5000A16M005 1200910002 1203580030 1200910008 1200910011 1300140094 130203-0054 1300140026 1300150099 1-3637-600-5205 1612618 21036836414 8R4006A16M010 1R3006A20M005 41-40011 42-00006 42-01015 4-22279-4 4-22281-1 4-22284-9 43-00113 43-01203 41-40013 42-00008 43-00343 43-01026 43-01162 43-01173 43-10000 XS3P-M421-2 600X518050X 8R5006A16M020 8R5006A16M005 8R4000A16M010 6-22279-3 1605332 N03FA03144 1300140077 43-16213 43-01338 XS2RD4265 XS2R-D426-1 XS8A-0441 859RD04-103R004 860RD04-113R004 860RD04-213R004 1-213245-2