

MRJR Series Rugged RJ45 Connectors

RUGGED RJ45 CONNECTORS FOR HARSH ENVIRONMENT APPLICATION, GENERATION 2

Amphenol's MRJR series RJ45 Connectors serve many markets and applications across the globe including Automotive, Communications, Industrial, Medical and Military.

MRJR series is a line of Generation 2 ruggedized RJ45 connectors with die cast housings and IP67 sealing, designed for Harsh Environment applications. MRJR provides a standard RJ45 interface. Protection is provided for IP67 applications per IEC 60529 specification. Data rates conform to 10BaseT or 100BaseT Ethernet.

- Cat6A Harsh RJ45 available, both in Right Angle and Vertical
- IP67 environmental sealing protects against water and dust
- Die cast metal housings protect against mechanical damage
- Wide variety of mounting and termination options
- Operating temperature range from -40°C to $+105^{\circ}\text{C}$ for extreme conditions
- RoHS compliant to meet environmental standards

FEATURES

- Internal and external seals made with flexible silicone rubber
- Die cast metal housings
- Standard RJ interface where Ethernet/IP Protocol is used
- Mates with existing standard connectors
- Similar in size compared to standard equivalents
- Wide variety of mounting and termination options
- RoHS compliant



TARGET MARKETS



BENEFITS

- Excellent sealing to IP67 and higher protection over wide temperature range
- Protects equipment from water and dust incursion
- Mechanically rugged and stable to protect against shock, vibration and impact
- Prevents distortion
- Can be used in wide variety of applications where standard RJ45s would be used
- Suitable for a wide variety of mating connectors which are readily available
- Able to replace existing standard parts with little to no changes
- Replace virtually any existing standard connector using standard footprints and mounting hardware
- Meets environmental, health and safety requirements

TECHNICAL INFORMATION

MATERIAL

- External Shell: Die Cast Zinc, Nickel Plated
- Front Insert: Clear Polycarbonate, UL94V-0
- Rear Inserts: High Temperature Resistant Nylon, Glass Reinforced, UL94V-0, Black
- Contacts: Phosphor Bronze, Plated with 1.27um (50u") min Gold over 1.27um (50u") min Nickel on the Mating Area and 2.54um (100u") min Matte Tin over Nickel on the Contact Tails
- Mating Area Ground Tab: Nickel Plated Copper Alloy
- Panel Gasket: Conductive Silicone Rubber, Black
- LED's: Epoxy Lens, Tin Plated Steel Tails
- Rear Screws: Nickel Plated Steel
- Internal O-ring: Silicone Rubber, Beige
- Printed Circuit Board: FR4 Fibreglass, Lead Free
- Additional Connector: UL Recognized Component
- Ferrite: Nickel Zinc Soft Ferrite Ceramic

ELECTRICAL PERFORMANCE

- Current Rating: 1.5A max per Contact (delta T ≤ 30°C)
- Contact Resistance: 20mΩ max
- Insulation Resistance: 500mΩ min
- Dielectric Withstanding Voltage: 1000 VAC rms (between adjacent contacts), 1500 VAC rms (contacts to ground)
- LED Characteristics: Forward DC Current 25mA max, Forward Voltage 2.5V max @2mA

MECHANICAL PERFORMANCE

- UL Recognition: Level DUXR2, File Number E135615
- Water & Dust Protection Level: Code IP67 per IEC 60529
- Operating Temperature Range: -40°C to +105°C
- Durability: Per EIA 364-09, 2500 Mating Cycles
- Vibration: Per EIA 364-28 Random Condition II (10g, 10-500Hz, 6 Hours), No Discontinuity > 1μs
- Shock: Per EIA 364-27 Test Condition A (11 ms, 50g, 1/2 Sine), No Discontinuity > 1μs
- Insertion & Withdrawal Force: Per EIA-364-13, 20N (4.5lbf) max (Latch Disengaged)

SPECIFICATION

- Amphenol Product Specification: TIA-1096-A, IEC 60603-7, IEC 60529

APPROVALS AND CERTIFICATIONS

- RoHS

PACKAGING

- Tray

ENVIRONMENTAL

- Temperature Life w/ Load: Per EIA-364-17, 1.5 A, 70°C, 500 Hours
- Temperature Life w/o Load: Per EIA-364-17, 105°C, 1000 Hours
- Thermal Shock: Per EIA-364-32, -55°C to +105°C, 25 Cycles
- Humidity: Per EIA 364-31, 21 Cycles, 504 Hrs, 25°C to 65°C, 90-95%RH, with -10°C Cold Shock
- Humidity: Per EIA-364-31, Steady State, 21 Days, 50°C, 90-95%RH
- Mixed Flowing Gas: Per EIA 364-65 Class IIA (Cl2, NO2, H2S & SO2), 14 Day Exposure
- Salt Spray: Per EIA 364-26, 250 Hours, 5% Salt, 35°C
- Solvent Resistance: Isopropyl Alcohol & 5% Sodium Hydroxide Solution, 24 Hrs Each
- LED Luminous Intensity: 0.5mCd min at 2mA Forward Current
- Solderability: Per EIA-364-52, 95% Coverage after Category 2 Steam Aging

TARGET MARKETS/APPLICATIONS



Transportation



Datacom
Telecom



Energy
Industrial




Medical



Military

PART NUMBER SELECTOR

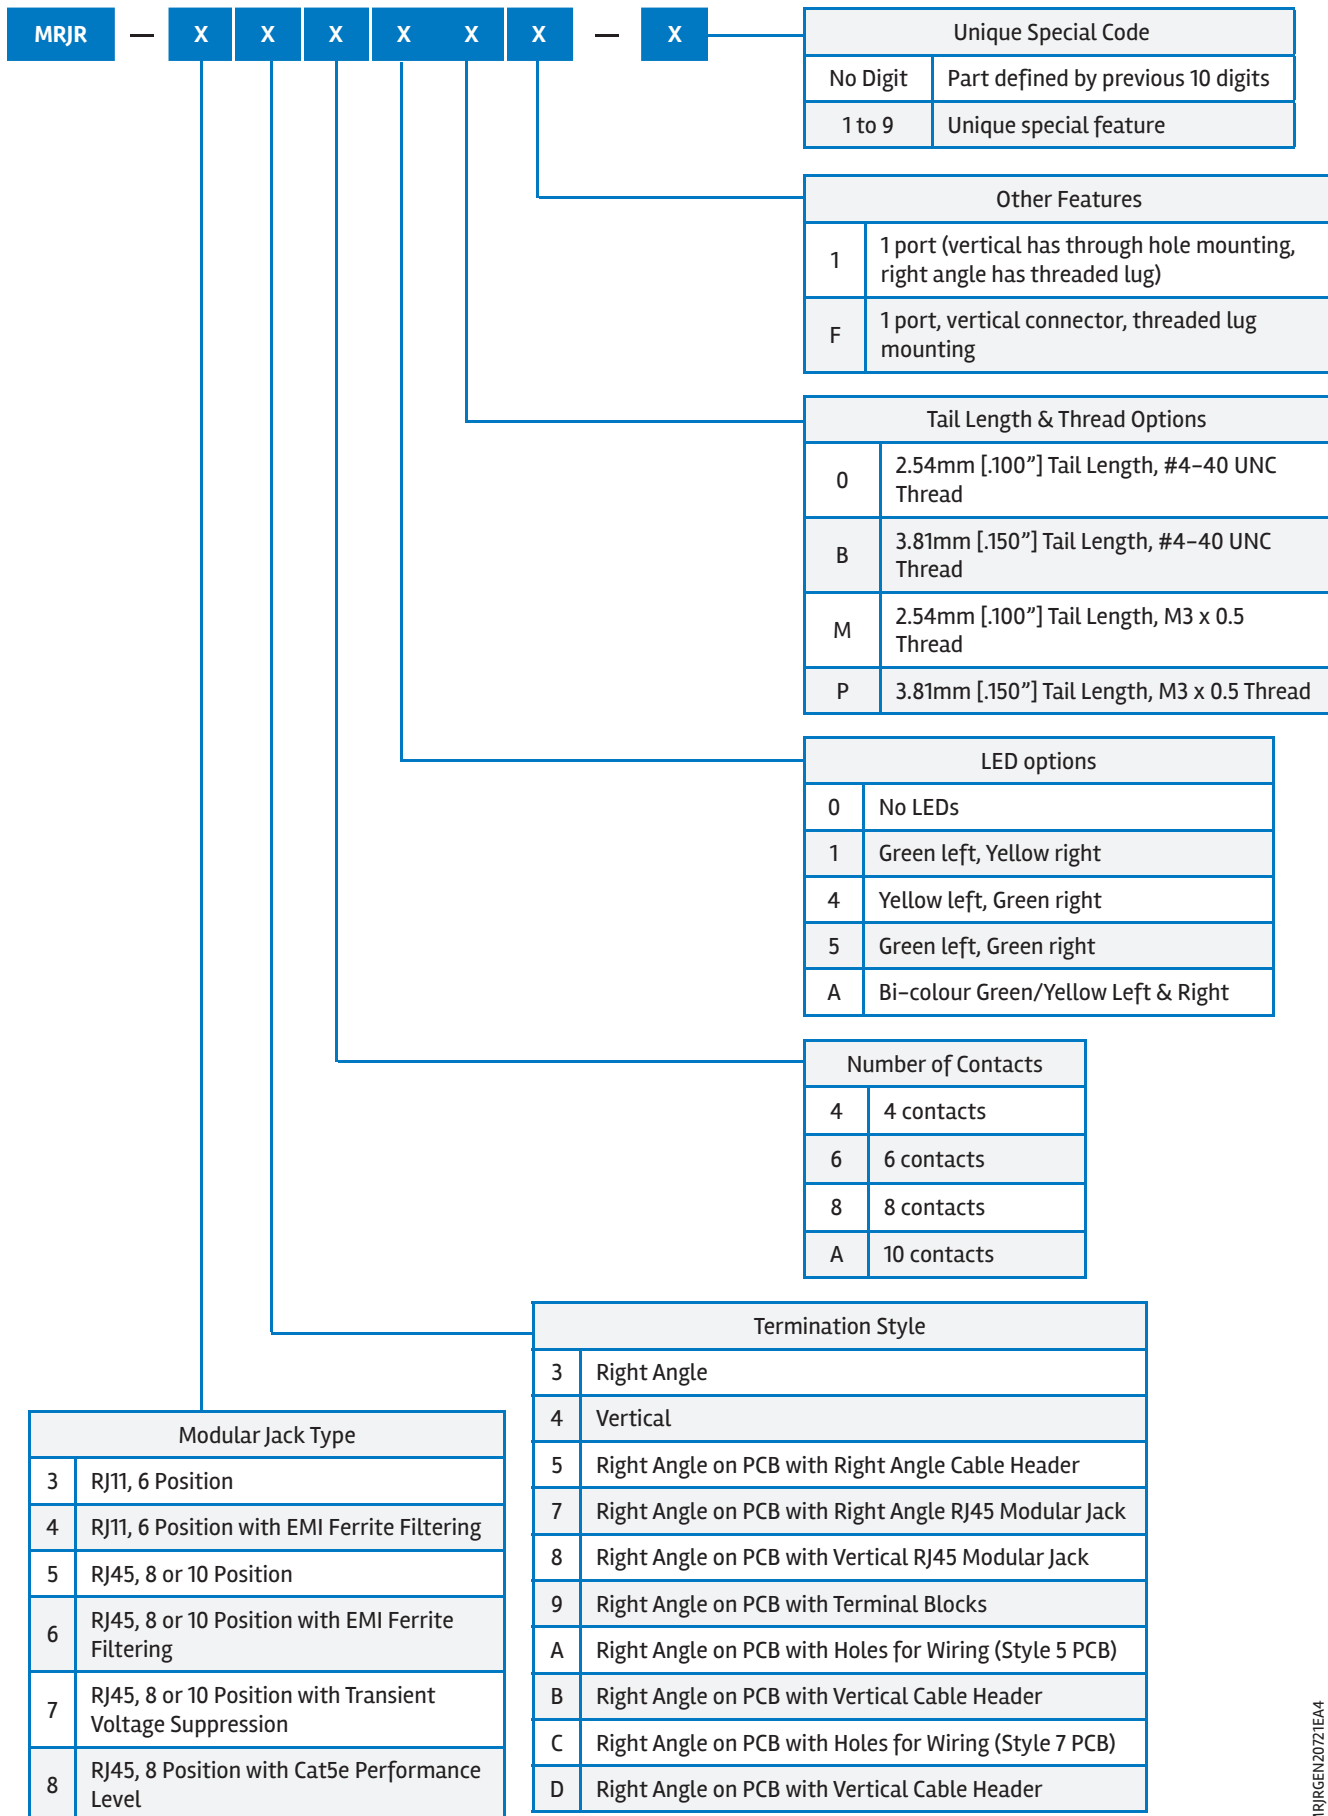

CM10MRJGEN2072EA4

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHJ-4P4C-1-V-4](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [MRJR-5481-0F2](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)