


RoHS Compliant

Rev.	SIGN	DATE	DESCRIPTION	APPROVER
B	—	03/21'22	The first release	PansLee

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

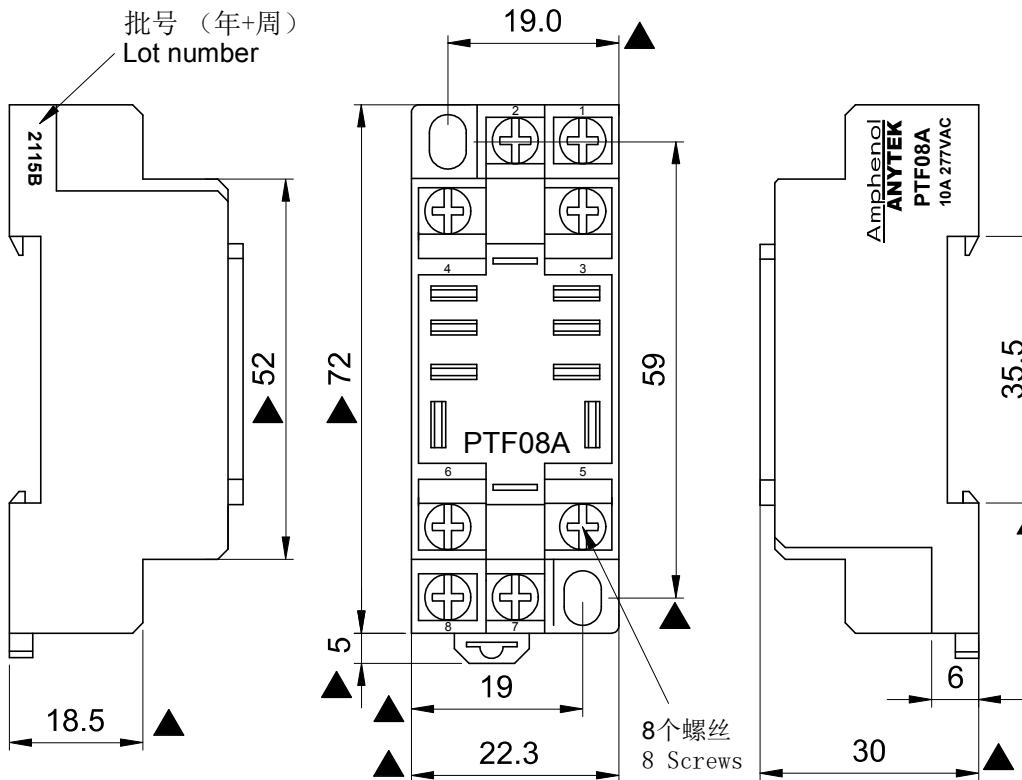

综合性能参数 Comprehensive performance parameter

- 绝缘电阻 Insulation resistance: 500MΩ@500VDC
- 介质耐压(初始) Dielectric strength (initial): 同极触点间 1800VAC, 1Min; 异极触点间 1800VAC, 1Min; 线圈触点间 1800VAC, 1Min; Between open contact 1800VAC, 1Min; Between different pole 1800VAC, 1Min; Between contact and coil 1800VAC, 1Min

- 负载 load: 10A
- 螺钉扭力 Screw torque: 0.5Nm
- 外接导线 Wire size: AWG20~14
- 外接导线 Wire size: 1.5~2.5mm<sup>2</sup>
- 插拔力 Mating & un-mating force: 3.5Kgf Min

安装方式 Mounting force

- 标准导轨安装 Standard Din-Rail
- 对角螺丝孔安装 Flange hole



使用环境 Service environment

- 使用环境温度 Ambient temperature: -25°~ +50°
- 湿度 Ambient humidity: 5%-85%
- 抗冲击 Shock resistance: 破坏性 Destruction: 1,000 m/s<sup>2</sup> 故障 Malfunction: 200 m/s<sup>2</sup>
- 耐振动 Vibration resistance: 破坏性 Destruction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude) 故障 Malfunction: 10 to 55 Hz, 0.5 mm single amplitude (1.0 mm double amplitude)

- 外壳 Base: 黑色 Black PC
- 重量 Weight: 大约 About 29.5g
- 重点尺寸 Critical dimension: ▲

插座规格号说明 Specification of socket number:

PTF 08 A 00G

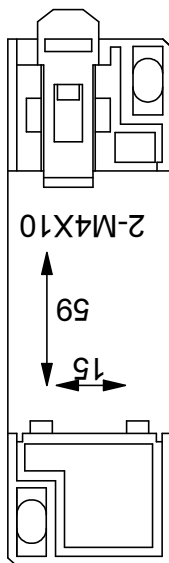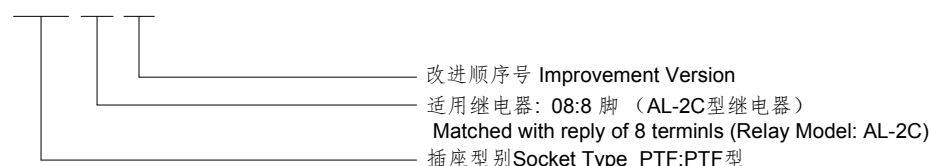

<b>Amphenol ANYTEK</b>				<b>CUSTOMER COPY</b>			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE	PTF08A AL2C工业继电器插座			DWG NO.	8PTF08A-0002		
PART NO.	PTF08A00G			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance			
		PansLee 2022.3.21	PansLee 2022.3.21	X ±0.50			
				UNIT: mm		X.X ±0.10	
				SCALE: NONE		X.XX ±0.05	
				SHEET: 01/01		X* ±1°	
				REV.: B			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Relay Sockets & Fixings](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[0000-825-81-00](#) [60SY4S05](#) [M41G](#) [670-0002](#) [670-0013](#) [670-0125](#) [670-0127](#) [6700152](#) [670-0153](#) [670-0154](#) [6700156](#) [D258-2TS00](#) [70-309](#) [7-1393143-3](#) [7-1616176-3](#) [7-1616360-5](#) [8000-DG2-5](#) [911361](#) [9-1616339-5](#) [PJF11N](#) [GDA16HD](#) [GDA95D](#) [GUA1](#) [GUA2-20](#) [GUR-120](#) [GUR-24](#) [GUR-240](#) [HE-91](#) [D52PR2T](#) [1310H-HDC](#) [1390H-1ST](#) [1410-2SM](#) [1410-3SM](#) [1419106-5](#) [1423685-1](#) [AS-11](#) [1510-1ST](#) [ATC18011](#) [ATC18012](#) [AX-4MS-40](#) [16-1197](#) [16-1278](#) [16-1328](#) [MSL09](#) [MSS09](#) [17540001](#) [N-11PC](#) [N-13PC](#) [N-13PC-BLK](#) [N-13S](#)