

Amphenol



Amphenol Industrial Sustainable Technologies

Photovoltaic Interconnection Systems

About us

Solar Connectors and Cable Assemblies

DURABLE AND RELIABLE

Founded in 1932, Amphenol Corporation in America, is a leading manufacturer of connectors and related products and one of top 500 companies in the world. There are 83 divisions with more than 40,000 employees around the world. Amphenol Corporation is divided into 8 Business Units based on product markets.

Amphenol Technology (Shenzhen) co., Ltd. is one of Amphenol's divisions, Located in Shenzhen, China, A leading manufacturer of Stamping & form terminals, Over-molded interconnectors, Connectors for harsh environment, Cable assembly design & development, including Solar connectors and cable assemblies.

Content

01

H4 Series Connectors

03

UTX Series Connectors

05

H4-R Series Connectors

09

Cable and Cable Assemblies

13



Junction Boxes

15



Tools and Accessories

H4 series PV Cable Connector

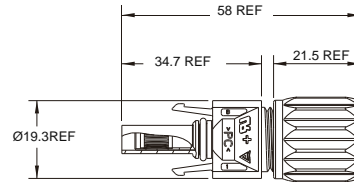

Part Number: H4CF.....



Part Number: H4CM.....



Technical Data

Rated voltage	1500V DC per UL 6703 1000V DC per TÜV IEC62852	Cable OD range	Ø5.3mm – 7.65mm
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² /10AWG)	Unlock options	Tool unlock type(TÜV/UL) or Manually unlock type(TÜV only)
Rated current (per UL 6703)	15A (2.5mm ² /14AWG) 20A (4.0mm ² / 12AWG) 30A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	12kV(1000V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+120°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Cold Formed (CF) or Stamped & Formed (S&F)*1	Overvoltage category/Pollution degree	CAT III/2
Insulation material	PC/PA	Material safety	RoHS, REACH compliant
Type of termination	Crimping	Approvals:	 TÜV certified to IEC 62852  UL certified to UL6703 R50388083 E339277

How to Order a Connector (please choose one code per position, below)

Part Number Coding: **H4 C F C 4 D M S**


Product Line	Product Type	Gender	Connector Type	Cable Size	Certifications	Packaging	Contact Type
H4 (H4 series)	C (Connector)	F Female	C Cable gland Tool unlock	0 Without Contact	D Dual UL/TÜV Certified	I 1 pc/bag	S S&F
				2 2.5mm ² / 14AWG		C 100 pcs/bag	
			M Male	D Cable gland Manually unlock		4*2 4.0mm ² /12 AWG & 6.0mm ² /10AWG(S&F)	T*3 Only TÜV Certified
		4.0mm ² /12AWG(CF)					
		6 6.0mm ² / 10AWG(CF)					

*2. When ordering a S&F contact, please use cable size order code "4" for both 4.0mm²/ 12AWG & 6.0mm²/ 10AWG.
*3. When ordering cable connectors, please use certifications order code "T" for Manually unlock type cable gland connectors.


*1: when ordering S&F contacts in reel vision, page 7
*2: Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

H4 series PV Panel Connector

Part Number: H4CF.....

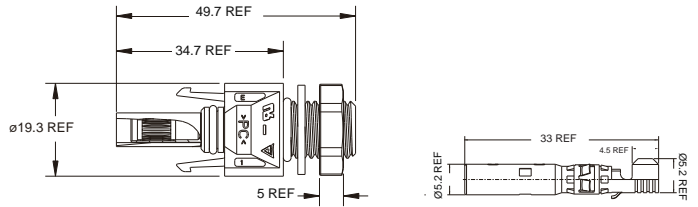

Part Number: H4CM.....

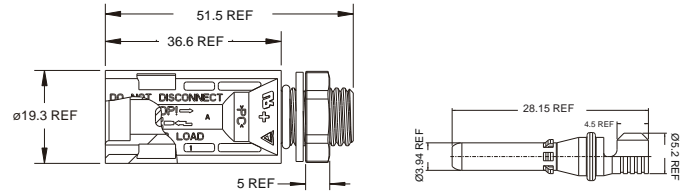

Technical Data

Rated voltage	1500V DC per UL 6703 1500V DC per TÜV IEC62852	Type of termination	Crimping
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² /10AWG)	Unlock options	Tool unlock type(TÜV/UL) or Manually unlock type(TÜV only)
Rated current (per UL 6703)	15A (2.5mm ² /14AWG) 20A (4.0mm ² /12AWG) 30A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	16kV(1000V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+120°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Cold Formed (CF) or Stamped & Formed (S&F)*1	Overvoltage category/Pollution degree	CAT III/2
Insulation material	PC	Material safety	RoHS, REACH compliant
		Approvals:	
		TÜV certified to IEC 62852 UL certified to UL6703	 R50388083 E339277

How to Order a Connector (please choose one code per position, below)

Part Number Coding: **H4 C F M 4 D M S**

Product Line	Product Type	Gender	Connector type	Cable Size	Certifications	Packaging	Contact Type	
H4 (H4 series)	C (Connector)	F Female	B Bulkhead M12 Manually unlock	0	Without Contact	D Dual UL/TÜV Certified	I 1 pc/bag	S S&F
				2	2.5mm ² / 14AWG		C 100 pcs/bag	
		M Male	M Bulkhead M12 Tool unlock	4 *2	4.0mm ² /12 AWG & 6.0mm ² /10AWG(S&F)	T *3 Only TÜV Certified	M 400 pcs/bag	(Blank) CF
					4.0mm ² /12AWG(CF)			
			N Bulkhead M14 Tool unlock	6	6.0mm ² / 10AWG(CF)			

*2. When ordering a S&F contact, please use cable size order code "4" for both 4.0mm²/ 12AWG & 6.0mm²/ 10AWG.



*3. When ordering panel connectors, please use certifications order code "T" for Manually unlock type bulkhead M12 connectors.

*1: when ordering S&F contacts in reel vision, page 7


*Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

UTX series PV Cable Connector

Part Number: UTXCF.....

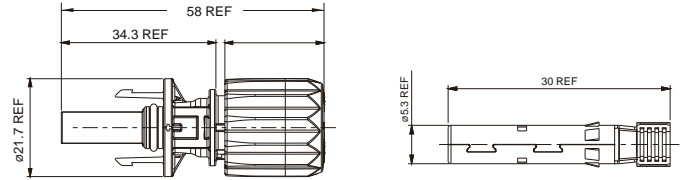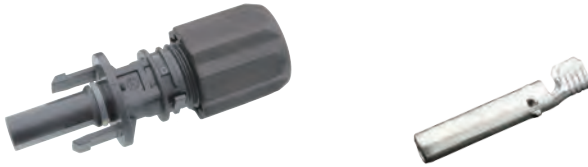

Part Number: UTXCM.....

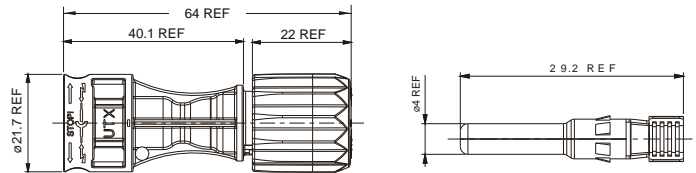

Technical Data

Rated voltage	1500V DC per UL 6703 1500V DC per TÜV IEC62852 1500V DC per JET IEC61730	Cable OD range	Ø5.3mm – 7.65mm
Rated current (per IEC 62852,85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² /10AWG)	Unlock options	Tool unlock type(TÜV/UL/JET) or Manually unlock type(TÜV only)
Rated current (per UL6703)	15A (2.5mm ² /14AWG) 20A (4.0mm ² / 12AWG) 30A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	16kV(1500V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Cold Formed (CF) or Stamped & Formed (S&F)*1	Overvoltage category/Pollution degree	CATIII/2
Insulation material	PPE/PA	Material safety	RoHS, REACH compliant
Type of termination	Crimping	Approvals:	TÜV certified to IEC 62852 UL certified to UL6703 JET certified to IEC61730



How to Order a Connector (please choose one code per position, below)

Part Number Coding: UTX C F A 4 A M

Product Line	Product Type	Gender	Contact type	Cable Size	Certifications	Packaging
UTX (UTX series)	C (Connector)	F Female	A Stamped and Formed contact (S&F)	0 Without Contact	A Triple UL/TÜV/JET Certified	I 1 pc/bag
				2 2.5mm ² / 14AWG		C 100 pcs/bag
		M Male	B Cold Formed contact (CF)	4*2 4.0mm ² /12 AWG & 6.0mm ² /10AWG(S&F)	B*3 Only TÜV Certified	M 400 pcs/bag
				6 6.0mm ² / 10AWG(CF)		


*2, When ordering a S&F contact, please use cable size order code "4" for both 4.0mm²/ 12AWG & 6.0mm²/ 10AWG.
*3, When ordering cable connectors, please use certifications order code "B" for Manually unlock type cable gland connectors.

*1: when ordering S&F contacts in reel vision, page 8


*Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

UTX series PV Panel Connector

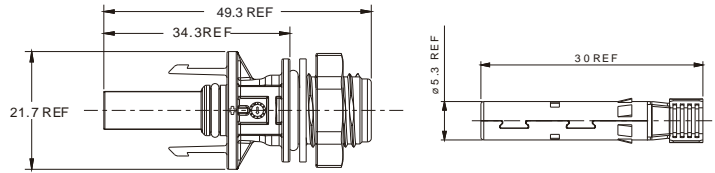

Part Number: UTX.....

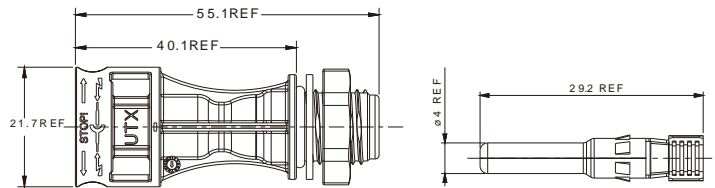

Part Number: UTX.....



Technical Data

Rated voltage	1500V DC per UL 6703 1500V DC per TÜV IEC62852	Type of termination	Crimping
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² / 14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² / 10AWG)	Unlock options	Tool unlock type(TÜV/UL) or Manually unlock type(TÜV only)
Rated current (per UL6703)	15A (2.5mm ² / 14AWG) 20A (4.0mm ² / 12AWG) 30A (6.0mm ² / 10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	16kV(1500V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Cold Formed (CF) or Stamped & Formed (S&F)*1	Overvoltage category/Pollution degree	CATIII/2
Insulation material	PPE/PA	Material safety	RoHS, REACH compliant
		Approvals: TÜV certified to IEC 62852 UL certified to UL6703	 R50340393  E469330

How to Order a Connector (please choose one code per position, below)

Part Number Coding: **UTX** **M** **F** **A** **4** **A** **M**

Product Line	Product Type	Gender	Contact Type	Cable Size		Certifications	Packaging
UTX (UTX series)	M Bulkhead M12	F Female	A Stamped and Formed contact (S&F)	0	Without Contact	A Triple UL/TÜV/JET Certified	I 1 pc/bag
				2	2.5mm ² / 14AWG		C 100 pcs/bag
	N Bulkhead M14	M Male	B Cold Formed contact (CF)	4 *2	4.0mm ² /12 AWG & 6.0mm ² /10AWG(S&F)	B *3 Only TÜV Certified	M 400 pcs/bag
				6	4.0mm ² /12AWG(CF) 6.0mm ² / 10AWG(CF)		

*2. When ordering a S&F contact, please use cable size order code "4" for both 4.0mm²/ 12AWG & 6.0mm²/ 10AWG.


*3. When ordering panel connectors, please use certifications order code "B" for Manually unlock type bulkhead connectors.

*1: when ordering S&F contacts in reel vision, page 8



*Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

H4-R series PV Cable connector


Part Number: H4LF.....

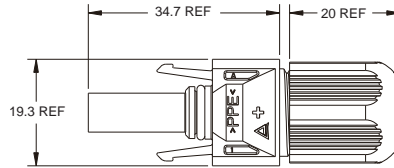

Part Number: H4LM.....

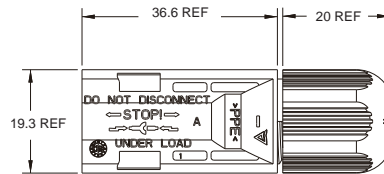

Technical Data

Rated voltage	1100V DC per TÜV IEC62852	Unlock options	Tool unlock type or Manually unlock type
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² /12AWG) 45A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	12.8kV(1100V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system	Stamped & Formed (S&F) ¹	Overvoltage category/Pollution degree	CAT III/2
Insulation material	PPE/PA	Material safety	RoHS, REACH compliant
Type of termination	Crimping	Approvals:	 TÜV certified to IEC 62852
Cable OD range	Ø4.5mm - 7.8mm		R50388083

How to Order a Connector (please choose one code per position, below)

Part Number Coding: **H4 L F C 4 T M S**


Product Line	Product Type	Gender	Connector Type	Cable Size		Certifications	Packaging	Contact Type
H4 (H4 series)	L (H4-R series Connectors)	F Female	C Cable gland Tool unlock	0	Without Contact	T TÜV Certified	C 100 pcs/bag	S S&F
				2	2.5mm ² / 14AWG			
		M Male	D Cable gland Manually unlock	4	4.0mm ² /12 AWG & 6.0mm ² /10 AWG		M 400 pcs/bag	

*1: when ordering S&F contacts in reel vision, page 7



*Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

H4-R series PV Panel Connector

Part Number: H4LF.....

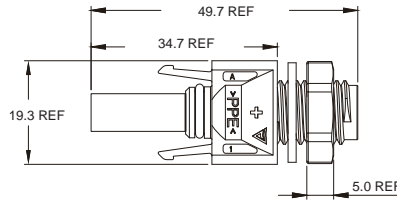

Part Number: H4LM.....

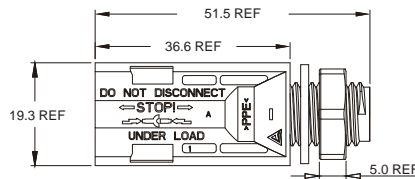

Technical Data

Rated voltage	1100V DC per TÜV IEC62852	Unlock options	Tool unlock type or Manually unlock type
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated impulse voltage	12.8kV(1000V DC per TÜV)	Ambient temperature range	-40°C to +85°C (TÜV)
Typical contact resistance	≤0.3mΩ	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Contact system options	Stamped & Formed (S&F)* ¹	Overvoltage category/Pollution degree	CAT III/2
Insulation material	PPE/PC	Material safety	RoHS, REACH compliant
Type of termination	Crimping	Approvals: TÜV certified to IEC 62852	 R50388083

How to Order a Connector (please choose one code per position, below)




Part Number Coding: **H4** **L** **F** **M** **4** **T** **M** **S**

Product Line	Product Type	Gender	Connector Type	Cable Size		Certifications	Packaging	Contact Type
H4 (H4 series)	L (H4-R series Connectors)	F Female	M Bulkhead Tool unlock	0	Without Contact	T TÜV Certified	C 100 pcs/bag	S S&F
		M Male	B Bulkhead Manually unlock	2	2.5mm ² / 14AWG		M 400 pcs/bag	
				4	4.0mm ² /12 AWG & 6.0mm ² /10AWG			

*1: when ordering S&F contacts in reel vision, page 7

*Crimping Tool, Page 15
Sealing caps, Wrench Tools, page 16

H4 Stamped and Formed Contacts for automatic assembly use

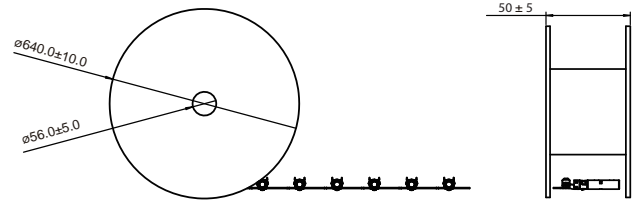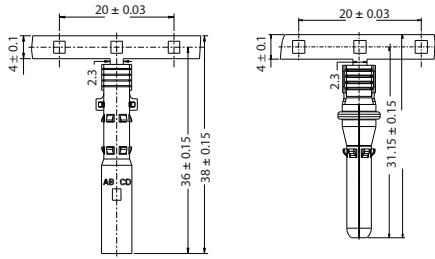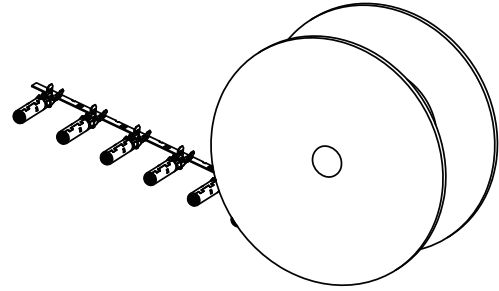

Technical Data

Rated voltage	1500V DC per UL 6703 1000V DC per TÜV IEC62852	Cable OD range	Ø4.5mm - 7.8mm
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² / 12AWG) 45A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated current (per UL 6703)	15A (2.5mm ² /14AWG) 20A (4.0mm ² / 12AWG) 30A (6.0mm ² /10AWG)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Rated impulse voltage	12kV(1000V DC per TÜV)	Upper limiting temperature	+120°C
Typical contact resistance	≤0.3mΩ	Flame class	UL 94 V-0
Contact material	Tin-plated Copper Alloy	Overshoot category/Pollution degree	CAT III/2
Type of termination	Crimping	Material safety	RoHS, REACH compliant

Approvals:
TÜV certified to IEC 62852
UL certified to UL6703

R50388083

E339277

How to Order S&F contacts on Reels (please choose one code per position, below)




Part Number Coding: H4 F F 4 R

Product Line	Product Type	Gender	Cable Size	Packaging	
H4 (H4 series)	F (S&F contact)	F Female	2	1.5mm ² / 16AWG & 2.5mm ² / 14AWG	R 2000pcs/reel
		M Male	4	4.0mm ² /12 AWG & 6.0mm ² /10AWG	

Note: if ordering contacts in 2000pcs/reel version, need to order contact and plastic housing separately. Contact's ordering code refers to this table, plastic housing should be chosen as H4CF0DM for female housing and H4CMC0DM for male housing.

*H4 S&F contacts in Reel vision is designed for fully automatic assembly.
 *Crimping Tool, Page 15

UTX Stamped and Formed Contacts for automatic assembly use

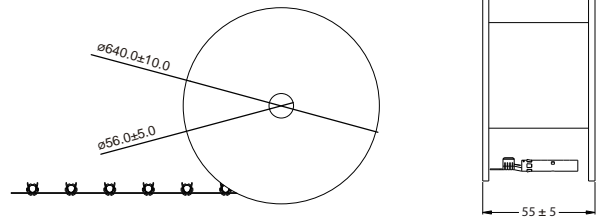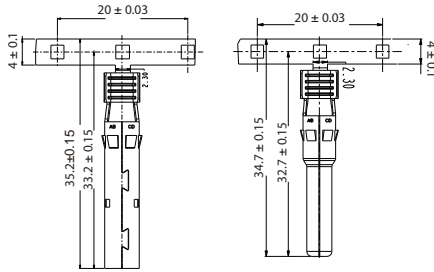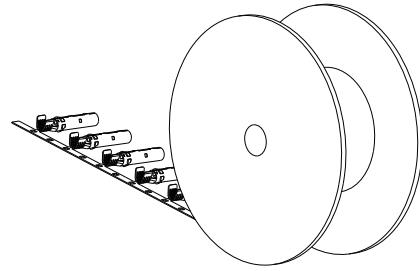

Technical Data

Rated voltage	1500V DC per UL 6703 1500V DC per TÜV IEC62852 1500V DC per JET IEC61730	Cable OD range	Ø5.3mm – 7.65mm
Rated current (per IEC 62852, 85°C)	25A (2.5mm ² /14AWG) 35A (4.0mm ² /12AWG) 45A (6.0mm ² /10AWG)	Ingress protection rating	IP68, mated (1 m, 1 h) & IP2X touch-proof, unmated
Rated current (per UL6703)	15A (2.5mm ² /14AWG) 20A (4.0mm ² /12AWG) 30A (6.0mm ² /10AWG)	Ambient temperature range	-40°C to +85°C (TÜV) -40°C to +90°C (UL)
Rated impulse voltage	16kV(1500V DC per TÜV)	Upper limiting temperature	+105°C
Typical contact resistance	≤0.3mΩ	Flame class	UL 94 V-0
Contact material	Tin-plated Copper Alloy	overvoltage category/Pollution degree	CATIII/2
Type of termination	Crimping	Material safety	RoHS, REACH compliant

Approvals:
TÜV certified to IEC 62852
UL certified to UL6703
JET certified to IEC61730



R50340393

E469330

B14T0080

How to Order S&F contacts on Reels (please choose one code per position, below)

Part Number Coding: **UTX** **F** **F** **4** **R**


Product Line	Product Type	Gender	Cable Size	Packaging
UTX (UTX series)	F (S&F contact)	F Female	2 2.5mm ² / 14AWG	R 2000pcs/reel
		M Male	4 4.0mm ² /12 AWG & 6.0mm ² /10AWG	

Note: if ordering contacts in 2000pcs/reel version, need to order contact and plastic housing separately. Contact's ordering code refers to this table, plastic housing should be chosen as UTXCF0AM for female housing and UTXCMA0AM for male housing.

* UTX S&F contacts in Reel vision is designed for fully automatic assembly.

* Crimping Tool, Page 15

HelioLug

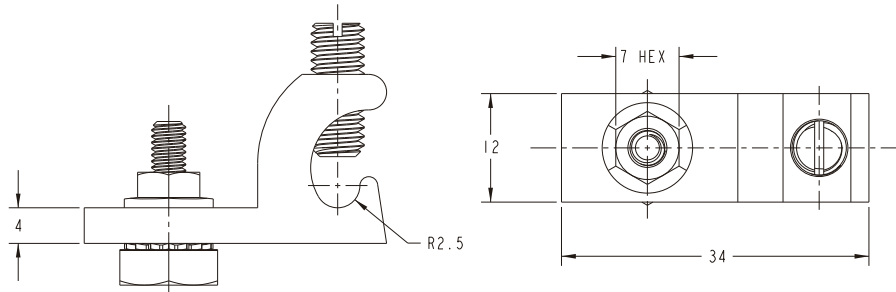

Certified to UL 2703 and cUL QIMS7 for Photovoltaic Bonding.



How to Order a Helios grounding lug:

Part Number Coding:



Installation instructions:



Place the lug to the designated module grounding hole with the star washer between the grounding lug and the module frame in order to break through the anodizing and establish electrical contact with the aluminum, Torque the bolt and nut to 30 in-lbs. Note: these instructions provide guidelines for general use, if available, the specific module manufacturer's instructions for the location of the star washer is to be followed.

For the attachment to the racking, slide the bolt into the mounting channel of the extrusion or into a hole drilled through the extrusion, Place the star washer between the racking and lug and secure the nut and bolt to 30 in-lbs.

Note: insert a 4 to 12 AWG copper wire into the lug and tighten the lug set screw to the copper wire to the torque based on the wire size. (4-6AWG at 35 in lbs and 8-12AWG at 30 in-lbs).

Do not exceed the maximum rate overcurrent protection, 20A/12AWG, 40A/10AWG, 90A/8AWG, 150A/6AWG, 200A/4AWG.

PowerLink Solar Cable

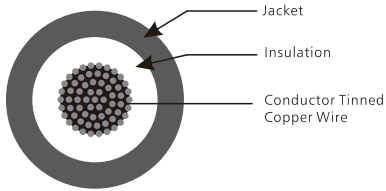

Structure:

- Conductor: stranded bare or tinned copper
- Insulation: XLPE material (white and black)
- Jacket: XLPE material (black, red and blue)
- Temperature range: -40°C to +85°C
- Environmental influence resistance: acid, alkalinity, UV, hydrolysis resistant.

How to Order Cables (please choose one code per position, below)

Part Number Coding: **HC P B L 4 T0 0 0**

Product Line	Product Type	Cable color	Cable type	Cable size	Approvals	Spec	Jacket type
HC (Helios cable)	P Powerlink-standard	B Black	L VDE0295-CLASS 27 strands(USE-2)	1 1.5mm ² /16AWG	T0 TÜV 1000V DC D0 Dual UL 600V DC, TÜV 1000V DC D1 Dual UL 1000V DC, TÜV 1000V DC U0 UL 600V DC U1 UL 1000V DC U2 UL 2000V DC E1 EN 1500V DC E2 Dual EN 1500V DC, UL 2000V DC	0 Normal	0 Normal type
		R Red		2 2.5mm ² /14AWG			
	A Armorlin-rodent proof	L Blue	M VDE0295-CLASS 27 strands(USE-2)	4 4.0mm ² /12AWG			
		G Grey		6 6.0mm ² /10AWG			
		U Powerlink-USE-2		H H VDE 0295-CLASS 5(UL, TUV and Dual)		8 10.0mm ² /8AWG 9 16.0mm ² /4AWG 5 25.0mm ² /3AWG	1 New extra thin

Features and Certificates:

Halogen free photovoltaic cables are used as the interconnection wiring for photovoltaic power systems.

Suitable in heavy-duty and harsh environment interconnections.

Flexibility at low temperature.

Thermoset-insulated conductor.

Thermoplastic jacket.

Long-term insulation resistance to moisture.

Anti-Termite

Range from 1.5mm² to 16.0mm².

Certificated to:

EN 50618, 1500V DC

TÜV 2 pfG 1169/08.2007 PV1-F



TÜV 2 pfG 1990/05.2012 PV 1500 DC-F

UL 4703 PV wire, cTÜVus

UL 4703 PV wire, 600V DC, 1000V DC, 2000V DC

* Customized options available, for more information, please contact Amphenol Industrial Sustainable Technology sales department.

PV Cable Assemblies

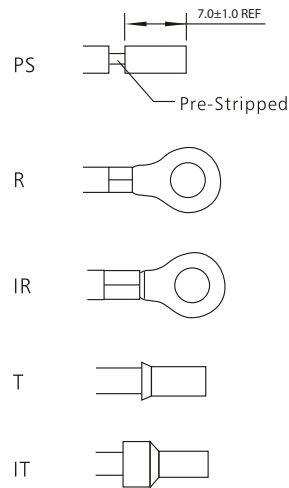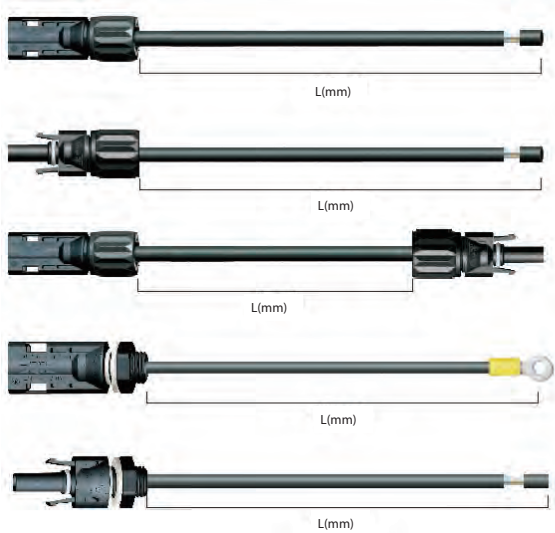

How to Order PV Cable Assemblies (please choose one code per position, below)

Part Number Coding: HC P F C 4 T0 B PS

Product Line	Product Type	Gender	Cable type	Cable size	Approvals	Cable Length	Cable color	End type	Variations*
HC (Helios cable)	P H4	F Female	C Cable gland	2 2.5mm ² /14AWG	T0 TÜV 1000V DC	5000mm	B Black	PS Pre-stripped wire	Customized options
	A UTX	M Male	M Panel M12	4 4.0mm ² /12AWG	D0 Dual UL 600V DC, TÜV 1000V DC	10000mm	R Red	R Ring terminal	
	U H4-R		N Panel M14	6 6.0mm ² /10AWG	D1 Dual UL 1000V DC, TÜV 1000V DC	12000mm	L Blue	IR Isolated ring terminal	
		P Mated pair	O Over-mold	8 10.0mm ² /8AWG	U0 UL 600V DC	•	G Grey	T Tube terminal	
					U1 UL 1000V DC	•	O Brown	IT Isolated tube terminal	
				U2 UL 2000V DC	E1 EN 1500V DC		OG Orange		
					E2 Dual EN 1500V DC, UL 2000V DC		Y Yellow		

Features and Certificates:

Halogen free photovoltaic cables are used as the interconnection wiring for photovoltaic power systems.

Suitable in heavy-duty and harsh environment interconnections.

Flexibility at low temperature.

Thermoset-insulated conductor.

Thermoplastic jacket.

Long-term insulation resistance to moisture.

Anti-Termite

Range from 1.5mm² to 16.0mm².

Certificated to:

EN 50618, 1500V DC

TÜV 2 pfG 1169/08.2007 PV1-F

TÜV 2 pfG 1990/05.2012 PV 1500 DC-F

UL 4703 PV wire, cTÜVus


UL 4703 PV wire, 600V DC, 1000V DC, 2000V DC

* Customized options available, for more information, please contact Amphenol Industrial Sustainable Technology sales department.

Overmolded Junction Cable Assemblies



Technical Data

Rated voltage	1500V DC per UL 9703	Protection rating	IP68
Rated current options (per UL6703)	1A to 15A current ratings available	Ambient temperature range	-40°C to +75°C (UL9703)
Rated impulse voltage	16kV(1500V DC per TÜV)	Upper limiting temperature	+105°C
Contact material	Tin-plated Copper Alloy	Flame class	UL 94 V-0
Insulation material	Thermoplastic	Overvoltage category/Pollution degree	CATIII/2
Unlock type	Tool unlock type	Material safety	RoHS, REACH compliant
		Approvals: Intertek to UL 9703	


How to Order a Overmolded junction (please choose one code per position, below)

Part Number Coding: MD FU 20 4 8 15 U P 50



Product Line	Product Type	Voltage	Input cable size	Output cable size	Junction type	Fuse current	Input connector	Gender	Cable length
MD (Overmolded junction)	H Cable harness	10 1000V DC	2 14AWG	2 14AWG	X X overmolded junction	1 1A	H H4	P Positive	50 50mm
			4 12AWG	4 12AWG		2 2A			100 100mm
	FU Fuse jumper	20 1500V DC	6 10AWG	6 10AWG	Y Y overmolded junction	⋮	U UTX	N Negative	1200 1200mm
			8 8AWG	8 8AWG		T T overmolded junction			15 15A
					Blank Single jumper	without fuse			⋮

* For customized X/Y/Z Overmolded junction cable assemblies, please contact Amphenol Industrial Sustainable Technology sales department.

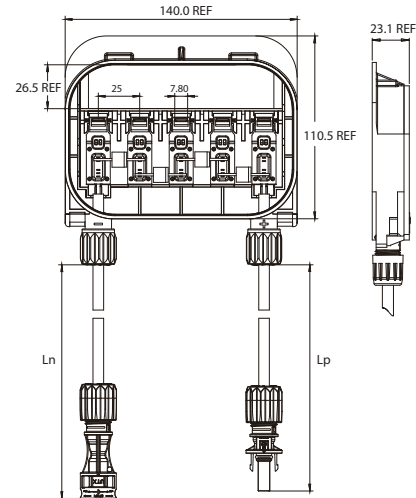Hercules III 5T4D PV Junction Box



Technical Data

Rated voltage	1000V DC per TÜV IEC62790 1000V DC per UL 3730	Pitch distance	25mm
Rated current	11A	Protection rating	IP68
Ribbon connection	Clamping	Ambient temperature range	-40°C to +85°C
Terminal quantity	5 rails	Flame class	UL 94 V-0, 5VA
Number of diodes	4	Overvoltage category/Pollution degree	CATIII/2
Sealing type	O-ring	Material safety	RoHS, REACH compliant
Ribbon connection	Clamping	Approvals:	  R50343159 E346053
Connector type	Amphenol UTX	UL certified to UL 3730	
Ribbon width	6.5mm Max	TÜV certified to TÜV IEC62790	


How to Order a Junction Box (please choose one code per position, below)

Part Number Coding: **HB** **D** **C** **C** **A** **C**


Product Line	Product Type	Rated voltage	Rated current & Diode	Cable Length	Variations*
HB (Helios JB)	D (Hercules III Junction box)	C TÜV 1000V/ UL 1000V(5T4D type)	C 11A (25PV045)	A Ln:1000mm, Lp: 1000mm B Ln: 12000mm, Lp: 1200mm • • •	C old version body and lid D new version body and lid • • •

* Customized options available, for more information, please contact Amphenol Industrial Sustainable Technology sales department.

Thin-film PV Junction Box

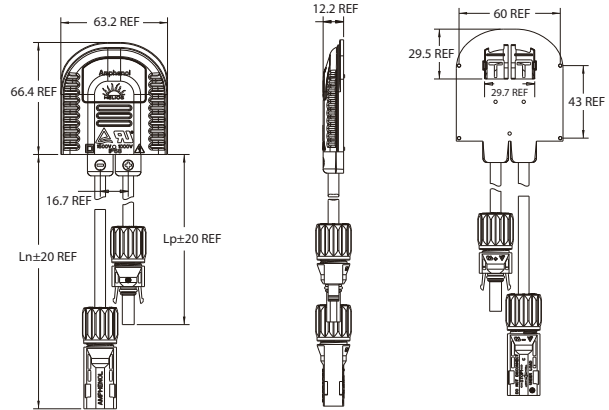

Technical Data

Rated voltage	1000V DC per UL 3730	Ambient temperature range	-40°C to +90°C
Rated current options	1A ~ 20A (without diode),4A(with diode)	Flame class	UL 94 V-0, 5VA
Sealing type	Potting	Overvoltage category/Pollution degree	CATIII/2
Termination type	Soldering	Material safety	RoHS, REACH compliant
Connector type	Amphenol H4	Approvals:	 E346053
Protection rating	IP68	UL certified to UL 3730	

How to Order a Junction Box (please choose one code per position, below)

Part Number Coding: **HB T G B G A N C . . .**

Product Line	Product Type	Terminals and diodes	Terminal style	Diode rating	Sealing type	Breathing hole	Cable size
HB (Helios JB)	T (Thin film Junction box)	G 2 contacts & 1 diodes	B Soldering contacts	G 5A, 1000V	A potting	N No	C 2.5mm ² / 14AWG
				H 10A, 1000V			
				J 8A, 1000V			
				K 20A, 1200V			
				N Without diode			

. . . **Y Y Y U**

Adhesive	Cable Length Positive(Ln)	Cable Length Negative(Lp)	Variations*
Y Yes	Y 1000mm	Y 1000mm	H H4 connectors ⋮ ⋮
N No	B 900mm	B 900mm	

* Customized options available, for more information, Please contact Amphenol Industrial Sustainable Technology sales department.

Crimping Tool

- * Both machined contacts, stamped and formed contacts can be crimped.
- * Suited for cable sizes of 2.5mm²/ 14AWG, 4.0mm²/12 AWG, 6.0mm²/10AWG.
- * The die set and locator can be ordered separately.
- * For flexible cable use only.



Crimping Tool

Appearance	Order number ^{*1}	Cable Range	Suitable for type of contacts			
			H4 S&F	H4 CF	UTX S&F	UTX C&F
	H4TC0003	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG	x			
	UTXTC0003	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG			x	
	UTXTC0004	4.0mm ² / 12AWG ;6.0mm ² /10 AWG 10.0mm ² /8AWG		x		x
	UTXTC0005 ^{*2}	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG		x		x

*1 Die set and locator are included in the crimping tool.

*2 UTXTC0005 is specifically used for cable size of 4.0mm²/12 AWG&6.0mm²/10AWG with Amphenol's H4 and UTX special version of 4&6 mm² Cold Formed contacts.

Individual Parts to be ordered separately

Appearance Locators & Crimping dies	Order number	Designation	Cable Range	Suitable for type of contacts			
				H4 S&F	H4 CF	UTX S&F	UTX C&F
	H4TP0002	Locator	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG	x			
	UTXTP0002	Locator	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG			x	
	UTXTP0004	Double-Locator	4.0mm ² / 12AWG ;6.0mm ² /10 AWG 10.0mm ² /8AWG		x		x
	UTXTP0003 ^{*3}	Double-Locator	2.5mm ² / 14AWG ;4.0mm ² /12AWG 6.0mm ² /10AWG		x		x
	UTXTD0003	Crimping Die	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG	x		x	
	UTXTD0005	Crimping Die	4.0mm ² / 12AWG ;6.0mm ² /10 AWG 10.0mm ² /8AWG		x		x
	UTXTD0004 ^{*3}	Crimping Die	2.5mm ² / 14AWG ;4.0mm ² /12 AWG 6.0mm ² /10AWG		x		x

*3 Locator UTXTP0003 and crimping die UTXTD0004 is specifically used for cable size of 4.0mm²/12 AWG&6.0mm²/10AWG with Amphenol's H4 and UTX special version of 4&6 mm² Cold Formed contacts.

Tools and Accessories

Tools and Accessories



Strip Tool

Order number: H4TS0000

Description

Designed with a locator to set a certain striped cable length, guarantees a consistent strip of PV cable, this strip tool is suitable for Cable OD range of 14AWG to 10AWG, properly suited for solar connector's assembly.



Wrench Tool for H4 Connectors

Order number: H4TW0001

Description

H4 Wrench Tool is used to tighten the caps of H4 Cable connectors and to unlock the locked H4 series connectors.



Wrench Tool for H4-R connectors

Order number: H4TW0003

Description

H4-R Wrench Tool is used to tighten the caps of H4-R series Cable connectors and to unlock the locked H4 series connectors.



Wrench Tool for UTX connectors

Order number: UTXTW0001

Description

UTX Wrench Tool is used to tighten the caps of UTX Cable connectors and to unlock the locked UTX series connectors.



Sealing caps for connectors

Order number: UTXPF UTXPM

Description

Sealing caps for tight sealing of the unplugged connectors, suitable for Amphenol's H4 and UTX series connectors, preventing moisture and dust from getting into the unplugged connectors.



Universal Unlock Tool

Order number: H4TU0000

Description

This universal unlock tool is used to unlock mated connectors, compatible with all Amphenol's H4 series and UTX series connectors, also suited for MC4 connectors.



Inspection Tool for UTX connectors

Order number: UTXTT0001

Description

This inspection tool is for testing the UTX contact's insertion depth, to control the correct and proper engagement of the UTX contact in the insulation.



Inspection Tool for H4 connectors

Order number: H4TT0001

Description

This inspection tool is for testing the H4 contact's insertion depth, to control the correct and proper engagement of the H4 contact in the insulation.

Amphenol Industrial Sustainable Technologies

Contact us

Amphenol Technology (Shenzhen) Co., Ltd.

Email: info@amphenol-industrial.com

Tel: +86-755-29918389

Web: www.amphenol-solar.com

Building C, 2nd Industrial Zone of Xia Shi Jia, Guangming New District,
Shenzhen, China. 518106

2018

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solar Connectors / Photovoltaic Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[1740699-7](#) [1971861-4](#) [1971131-4](#) [1971858-3](#) [1971861-3](#) [PV-090508-F03](#) [PV-090508-M10](#) [PV-090510-F03](#) [2270184-3](#) [2270154-2](#)
[2270226-4](#) [PV-090508-M06-N](#) [1987558-2](#) [PV-090506-F03](#) [UTXPM](#) [UTXPF](#) [UTXCMB6AM](#) [1627092](#) [1017635](#) [1-2306314-1](#) [1-2306314-2](#)
[1302440201](#) [1303450000](#) [PV-STICK+](#) [VPE10](#) [2-1971862-2](#) [H4CMC6DM](#) [1705996](#) [1705995](#) [1971858-2](#) [5-2306317-2](#) [1704926](#)
[H4CFC4DIS](#) [H4CFC4DC](#) [H4CFC4DM](#) [H4CFC6DM](#) [H4CFM2DI](#) [H4CFM6DI](#) [H4CMC2DI](#) [H4CMC8DM](#) [H4CME8UM](#) [H4CMM6DI](#)
[H4CMC4DMS](#) [H4CMC4DIS](#) [H4PF](#) [H4PM](#) [PWJ-03BMMB-LL8001](#) [UTXCFA0AM](#) [UTXCFA4BMH](#) [UTXCMA0AM](#) [UTXCMA4AM](#)
[UTXCMA4BMH](#)