

Now you're connected!

About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.

Related Products

RJSSE




P/N RJSSE-5381 SHOWN
SINGLE PORT, 8 POSITIONS,
WITH SHIELD AND LIGHT PIPE


RJHSE



P/N RJHSE-3081 SHOWN
SINGLE PORT VERTICAL MOUNT,
NO SHIELD, WITH LEDs



P/N RJHSE-5385-02 SHOWN
TWO PORT REGULAR MOUNT,
WITH SHIELD AND LEDs

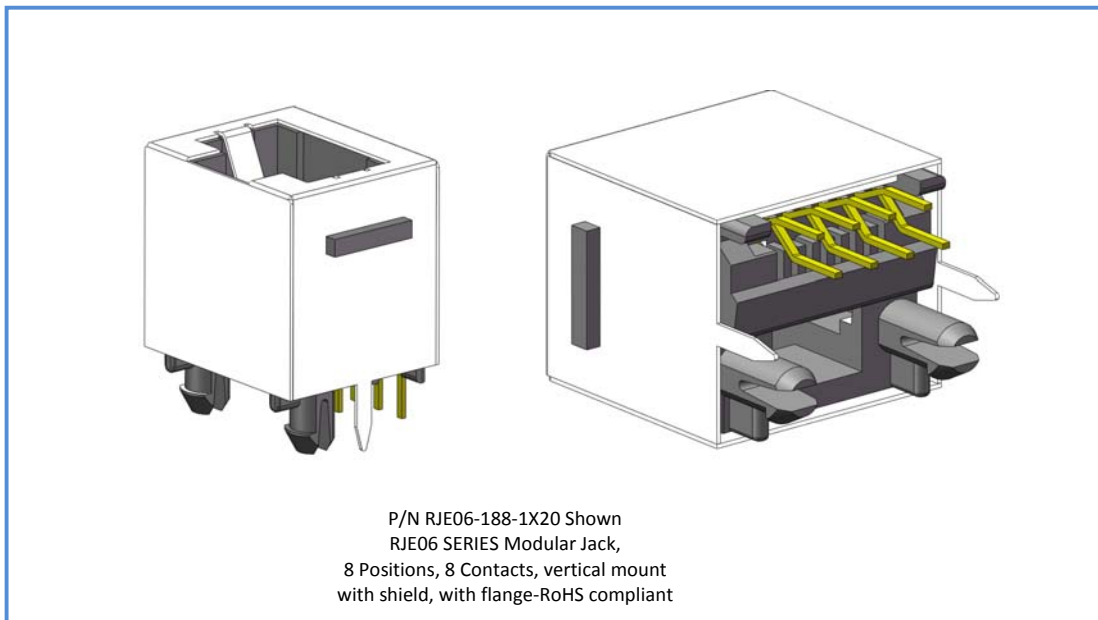

P/N RJE06-188-1X20 Shown
RJE06 SERIES Modular Jack,
8 Positions, 8 Contacts, vertical mount
with shield, with flange-RoHS compliant

Overview

This product specification defines the general use and performance parameters for Amphenol's RJE06 series of modular jacks.

Availability: Single port, 6P6C, 8P8C available, flanged and shielding options.

Usage

The RJE06 series of modular jack supports Ethernet Protocols.

Applications

Intended for use in applications such as:

Networking & Telecom

- Wireless (WiMAX)
- Network servers
- Hubs, routers, switches

Office & Home Equipment

- PC's, Laptops, Copiers/Printers
- Telephones, modems
- Surge Protectors
- ATMs, Vending Machines

Consumer Goods

- Security Systems
- Set Top Boxes
- Video Game Systems

Miscellaneous

- Multi-Media Equipment
- Industrial Equipment
- POS Terminals


Now you're connected!

About Amphenol Commercial Products

Amphenol's commercial connector products are used in a variety of end user applications including networking, telecom, server & computer, storage & HDD, consumer electronics and entertainment, professional audio & Industrial & Military/Aerospace.

Related Products

RJULE




P/N FJULE-4X182-01 SHOWN
SINGLE PORT REGULAR MOUNT,
STANDARD SHIELD WITH SMT

FRJAE



P/N FRJAE-418 SHOWN
SINGLE PORT, 8 POSITIONS,
WITH FERRITE FILTER AND
SHIELD (FRONT TABS)

RJLSE



P/N RJLSE-41181-01 SHOWN
SINGLE PORT REGULAR MOUNT,
STANDARD SHIELD WITH SMT

Electrical Characteristics

Contact resistance:	20 mΩ max.
Insulation resistance:	500 MΩ minimum at 500V DC for 2 minutes max.
Current rating:	1.5 Amps
Voltage rating:	125 Volts AC
DWV	1000 VAC, 60 Hz. 1 min.

Mechanical Characteristics

Mating connector insertion force: 5.0 lbs. Maximum.
Mating connector pull retention force: 20 lbs Minimum.
Durability: 750 mating & unmating cycles

Recommended soldering temperature:
Wave soldering peaked at 260° C for 5 seconds

Operating temperature: -40° C to +70° C

Material Requirements

RJE06 connectors are RoHS compliant.
Unless otherwise specified, the materials for each component shall be:

Insulator:

- Engineering thermoplastic material - Complies with UL 94V-0, Black color

Contacts:

- Phosphor Bronze hard temper with gold thickness options (6μ", 15μ", 30μ", 50μ") over 50μ" minimum Nickel on contact mating area.
- 100μ" minimum matte tin or gold flash plating on tail area.

Shield:

- Copper Alloy, Nickel plating over all

Available Documents

Drawing Numbers:

P-RJE06-166-1X10	RJE06 SERIES, VERTICAL MOUNT, 6P6C, MODULAR JACK, WITH SHIELD-RoHS COMPLIANT
P-RJE06-188-0X10	RJE06 SERIES, 8 POSITIONS, 8 CONTACTS, VERTICAL MOUNT, UNSHIELDED, WITHOUT FLANGE-RoHS COMPLIANT
P-RJE06-188-0X1X	RJE06 SERIES, 8 POSITIONS, 8 CONTACTS, VERTICAL MOUNT, NON SHIELDED-RoHS COMPLIANT
P-RJE06-188-1X10	RJE06 SERIES, 8 POSITIONS, 8 CONTACTS, VERTICAL MOUNT, WITH SHIELD, NON FLANGED, -RoHS COMPLIANT
P-RJE06-188-1X20-H	RJE06 SERIES, 8 POSITIONS, 8 CONTACTS, VERTICAL MOUNT, WITH SHIELD AND FLANGE-RoHS COMPLIANT

Contact factory or Authorized Amphenol representative for additional configurations.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHJ-4P4C-1-V-4](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [MRJR-5481-0F2](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)