


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
C	CHNAGE 11.81 TO 11.43 PER ACTUAL PART	OCT29/12	L.CHAN
D	UPDATE DRAWINGS	MAY23/17	L.CHAN

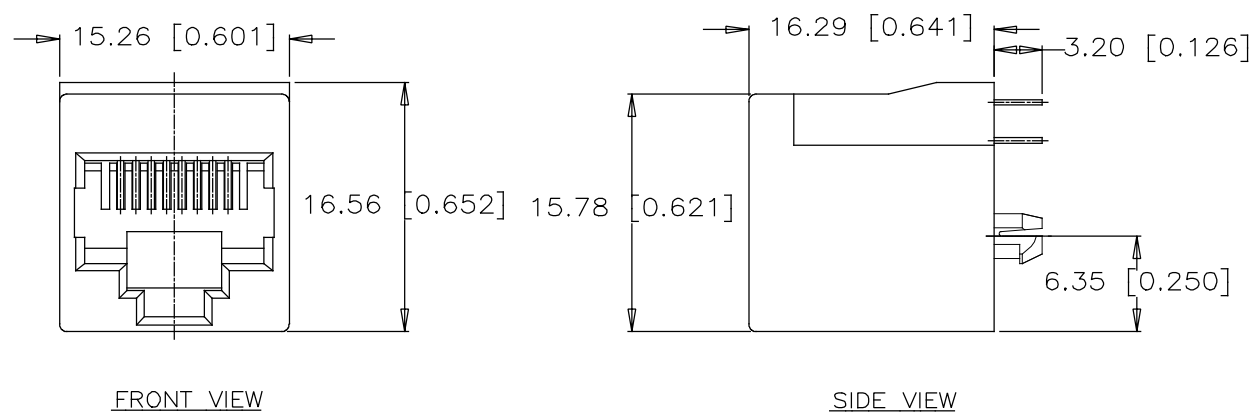


- MATERIALS:**  
 PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0  
 COLOR: BLACK  
  
 CONTACTS: PHOSPHOR BRONZE  
 PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES  
 SEE AMPHENOL PART NUMBER FOR DETAIL.  
 50 μ" [1.27 MICRONS]  
 MIN. NICKEL UNDERPLATE  
 100 μ" [2.54 MICRONS]  
 MIN. MATTE TIN OR GOLD FLASH  
 ON CONTACT TAILS.

- MECHANICAL:**  
 MATING FORCE: 5.0 LBS MAX.
- ELECTRICAL:**  
 CONTACT RESISTANCE: 40 MILLIOHMS MAXIMUM  
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM  
 CURRENT RATING: 1.5 AMPS  
 VOLTAGE RATING: 125 VOLTS AC
- ENVIRONMENTAL:**  
 STORAGE TEMPERATURE: -20°C to 85°C  
 PACKAGING METHOD: TRAY PACKAGING

PART NUMBER: RJE08-188-0X10

- GOLD PLATING:**
- 1 = 6 μ"
  - 2 = 15 μ"
  - 3 = 30 μ"
  - 4 = 50 μ"

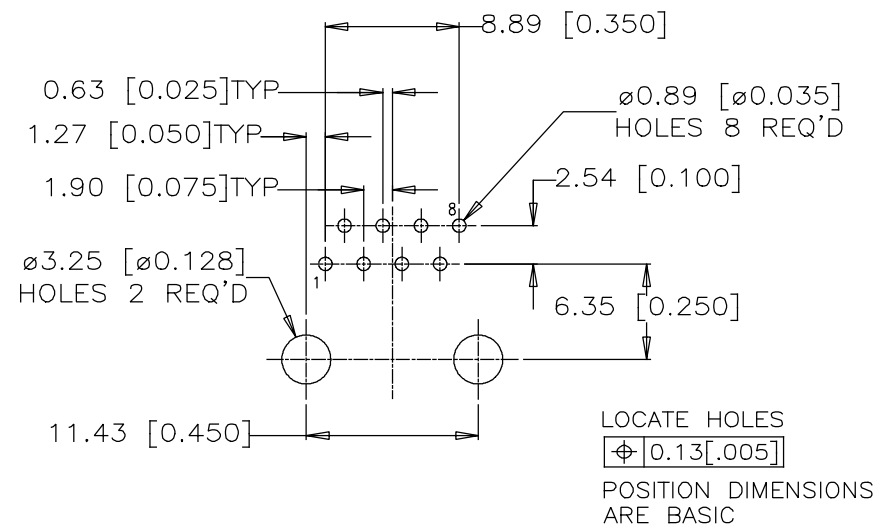

**RECOMMENDED P.C.B. LAYOUT**  
 (COMPONENT SIDE OF BOARD)  
 TOLERANCE: ±0.05 [.002](TOP VIEW)

LOCATE HOLES  
 $\phi 0.13[.005]$   
 POSITION DIMENSIONS  
 ARE BASIC

UNLESS SPECIFIED OTHERWISE	DRAWN PAULW	DATE DEC 09/05
PRIMARY UNITS MILLIMETER	CHECKED LAWRENCE.C	DEC 05/05
SECONDARY INCH	M.E. APP'D	
REFERENCE IN PARENTHESES	Q.A. APP'D	
GENERAL TOLERANCES	DWG APPR.	
1 DECIMAL PLACE ±0.30	ENG. REL. NO.	
2 DECIMAL PLACES ±0.25	REF.	
3 DECIMAL PLACES ±0.20	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°		

<b>Amphenol Canada Corp.</b> www.amphenolcanada.com	
TITLE	MODULAR JACK, TOP ENTRY, 8 POSITION, 8 CONTACTS, WITHOUT FLANGE, UNSHIELDED, - RoHS COMPLIANT
DWG. NO.	P-RJE08-188-0X10
CODE ID NO. 03554	DWG SIZE: C SCALE: N/A SHEET 1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Modular Connectors](#) / [Ethernet Connectors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[8949-H88/06BLKA/SN](#) [74441-0010/BKN](#) [MP1010RX-1000](#) [MP44RX-1000](#) [PHJ-4P4C-1-V-4](#) [PHP-6P6C-5](#) [GAX-3-66](#) [GAX-8-62](#) [GDCX-PA-66-50](#) [GDCX-PN-64](#) [GDCX-PN-66](#) [GDCX-PN-66-50](#) [GDLX-A-66](#) [GDLX-N-66](#) [GDLX-S-66](#) [GDLX-S-88K](#) [GDTX-S-88-50](#) [GDX-PA-1010](#) [GLX-N-1010M-BLK](#) [GLX-S-88M-BLK](#) [GMX-N-1010](#) [GMX-S-1010](#) [GMX-S-66](#) [GMX-SMT4-N-88](#) [GPX-2-64](#) [GSGX-N-2-88](#) [GSGX-N-4-88](#) [GSX-NS2-88-3.05-50](#) [PT-108A-8C-UL](#) [PT-J951-8C](#) [PTS-J531-8CS-50UL](#) [1-1775629-2](#) [A-2014-0-4](#) [GWLX-S-88-GR](#) [GWLX-S9-88-YG](#) [DC-1021-8-WH-6](#) [1300530003](#) [1324640-4](#) [RJ11FTVC2G](#) [RJ11FTVC2N](#) [RJFTVX2SA1G](#) [132764-001](#) [1413235](#) [MP88X-1000](#) [MPS88RX-5000](#) [MRJR-5481-0F2](#) [E5288-S000K3-L](#) [E5908-15A242-L](#) [155302-001](#) [AX100653](#)