
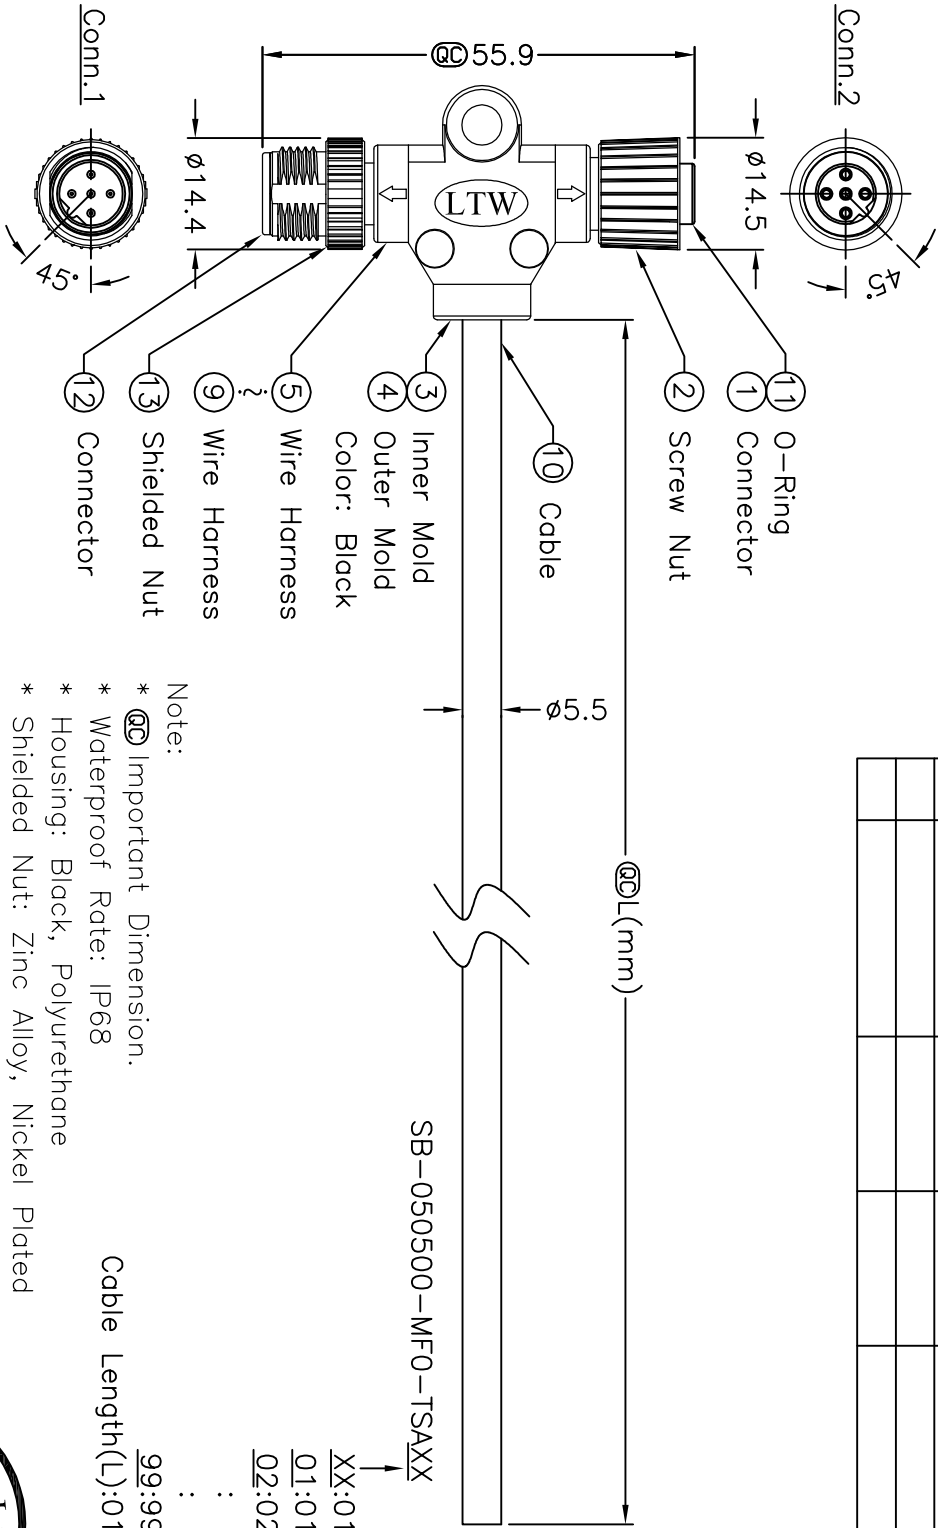



REV.	EQN NO.	DATE	SIGN	DESCRIPTION



Conn.1	Conn.2
1	1
2	2
3	3
4	4
5	5

Note:

- * \varnothing Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Polyurethane
- * Shielded Nut: Zinc Alloy, Nickel Plated
- * Screw Nut: Zinc Alloy, Nickel Plated
- * Male Pin: Copper Alloy, Gold Plated
- * Female Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 5Pcs
- * Cable: UL2464 22AWG*5C+TALCUM
- * Black, PVC Jacket UV Resistant OD=5.5mm
- * Cable Length Tolerance: 1M~10M \pm 5%mm, 11M~99 \pm 500mm.



UNIT:mm	
TOLERANCE	± 0.5 mm

TITLE	M12B Conn
SCALE	F:Free
REV.	A
SHEET	1
OF	1
Inspection Item	\varnothing

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	SB-050500-MF0-TSXXX
CUSTOMER	ALTW

DRAWN BY	Kenneth James	DATE	2007/12/07
CHECKED BY	Ricky Valerio	DATE	2007/12/07
APPROVED BY	Cloud	DATE	2008/01/04

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Cables / Actuator Cables](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[60963](#) [60964](#) [M83513/19-F01CP](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#)
[802027213811-1](#) [804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#)
[1200651713](#) [1200660844](#) [1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#)
[1200860125](#) [1200870123](#) [1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#)
[1200661342](#) [1200661343](#) [1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#)
[1200980008](#) [1200980031](#) [1210502211](#)