

## SGX-7CO

### Industrial Carbon Monoxide Sensor

(Application : Fixed Gas Detectors)

#### PERFORMANCE

Range	0 – 1000 ppm
Output Signal	100 ± 20 nA/ppm
Typical Baseline Range (pure air)	<±2 ppm CO equivalent
Linearity	Linear
Response time (T <sub>90</sub> )	<30 s
Maximum Overload	2000 ppm
Long-Term Output Drift	<5% per annum
Recommended Load Resistor	10 ohms
Repeatability	<±1% CO equivalent
Resolution	< 0.5 ppm
Warranty	2 years
Bias	No Bias

#### OPERATING CONDITIONS

Temperature Range	-30°C to +50°C
Operating Humidity	15 – 90% RH (non-Condensing)
Pressure range	800 to 1200 mbar
Operating Circuit	See Application Note 2
Recommended Storage Temperature	0°C to 20°C
Expected Operating Life	> 24 Months in Air


#### INTRINSIC SAFETY DATA

Maximum at 2000 ppm	0.3 mA
Maximum o/c Voltage	1.3 V
Maximum s/c Current	<1.0 A

Whilst SGX has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. SGX accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of SGX products in accordance with information contained herein.  
 In case of modification of the product, SGX disclaims all liability.

#### PRODUCT DIMENSIONS

All dimensions in mm  
 All tolerances ±0.15 mm

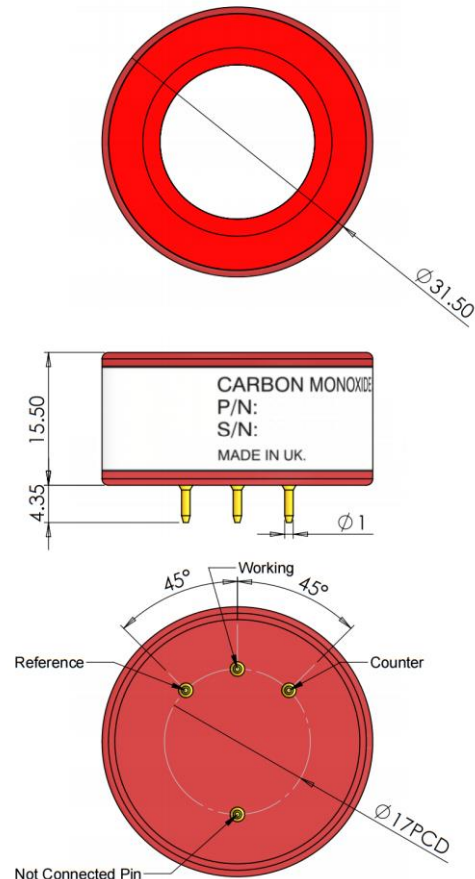

#### IMPORTANT NOTES


- All performance is based on conditions at 20°C, 50% RH and 1 atm, using SGX recommended circuitry.
- Sensor performance is temperature dependant; please contact SGX for temperature performance other than 20°C.
- Do not solder to the connector pins as this may damage the sensor and thereby invalidate the warranty.
- Details on recommended connector pins can be found in the Frequently Asked Questions within the Gas Sensor section of the SGX website.
- This device is designed to be RoHS compliant.

## CROSS-SENSITIVITY DATA

GAS	CONCENTRATION	SGX-7CO
Hydrogen Sulfide	15 ppm	<0.1 ppm
Sulfur Dioxide	5 ppm	0 ppm
Nitrogen Dioxide	5 ppm	-0.5 ppm
Nitric Oxide	35 ppm	<7 ppm
Hydrogen	100 ppm	<60 ppm
Chlorine	1 ppm	0 ppm
Ethylene	100 ppm	<90 ppm

*Note: This table is for reference only and are typical values. Cross Sensitivities may not be linear and should not be scaled. Calibration should be carried out with the actual gas at a known concentration.*

## TEMPERATURE

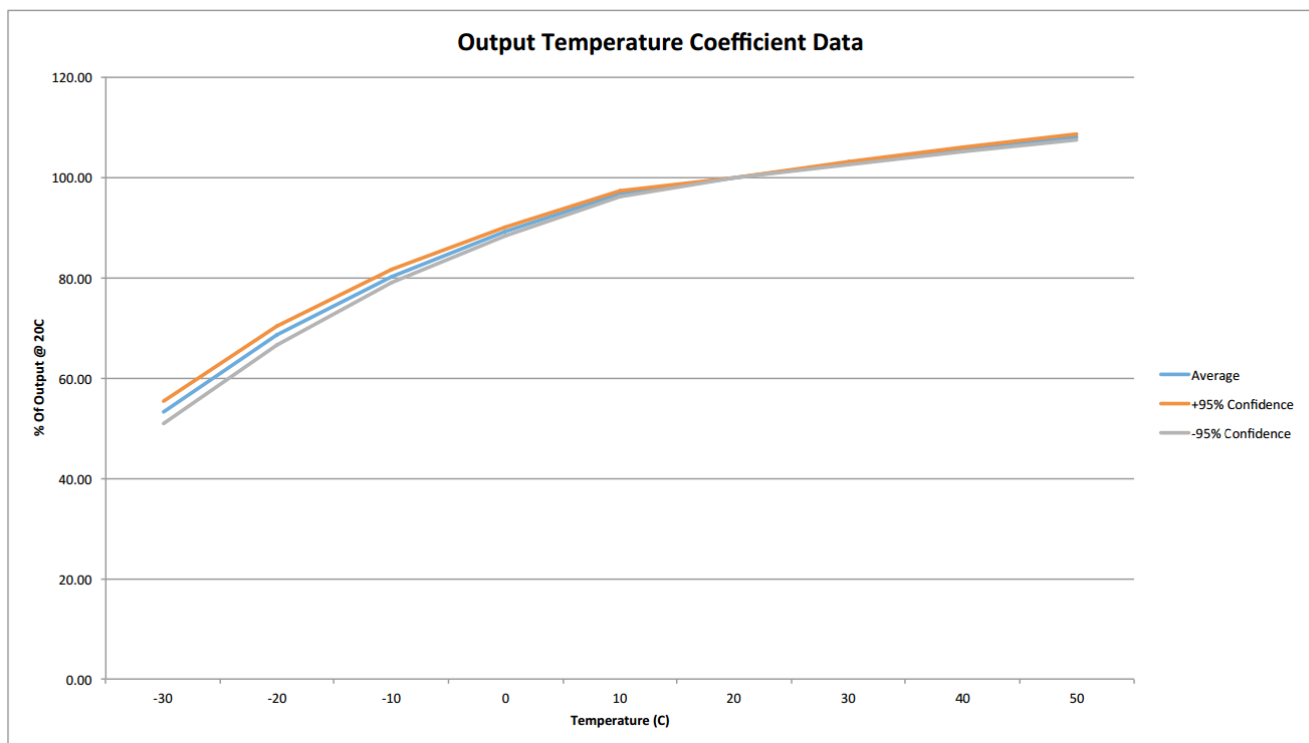

## POISONING

SGX sensors are designed to operate in a wide range of harsh environments and conditions. However it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instrument and operation. When using sensors on printed circuit boards (PCBs), degreasing agents should be used prior to the sensor being fitted.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Air Quality Sensors](#) category:*

*Click to view products by [Amphenol](#) manufacturer:*

Other Similar products are found below :

[GMS-MSTH2.S.V.3](#) [MO86571](#) [MO86561](#) [076074 01](#) [DE800.A.1](#) [MF010-2-LC1](#) [MF020-2-LC3](#) [KGZ10-5PIN](#) [GMS10SENSORS](#) [IR25TT](#)  
[208280-0001](#) [IR11GM](#) [IR12GM](#) [IR21BD](#) [GMS10-18C](#) [KGZ12](#) [S-300L-3V-5000-SLEEP-UART](#) [MP7227-TC](#) [SGPC3-TR-2.5KS](#) [T6713-6H](#)  
[POLOLU-1482](#) [3.000.475](#) [3.000.496](#) [3.000.497](#) [HPMA115S0-XXX](#) [SGPC3-2.5k](#) [T3032-2-10K-24-P](#) [VQ6MB](#) [INIR-CD-5%](#) [VQ23TB](#)  
[IR11GJ](#) [VQ31MB](#) [IR11BR](#) [GP2Y1026AU0F](#) [VQ549ZD](#) [MHM501-00](#) [MHM500-00A](#) [MHM305-01](#) [MICS-4514](#) [VQ548ZD-S](#) [SEN-09403](#)  
[IR15TT](#) [MICS-5524](#) [MICS-5914](#) [MICS-2714](#) [INIR-ME-100%](#) [T8100-D](#) [VQ21TB](#) [IR21EJ](#) [VQ603/2](#)