

CONTACT ORIENTATION ON ROLL

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. MATERIAL:

1.1. CONTACT BODY: COPPER ALLOY.
1.2. OUTER SPRING: STAINLESS STEEL.

2. SPECIFICATIONS:

2.1 CURRENT RATING : 13A MAX. 2.2 TERMINATION TYPE : CRIMPING.

2.3 WIRE RANGE: 16~18AWG.

2.4 WIRE INSULATION DIA(MAX): Ø3.2mm.


3. ROHS COMPLIANT.

4. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.


5. AVAILABLE TOOLS:

5.1 HAND CRIMPER: MFX-3954. 5.2 CRIMP APPLICATOR: MFX-3957. 5.3 EXTRACTION TOOL: QXRT16.


P/N	CONTACT PLATING(MATING AREA)
SS16M1T	TIN PLATING OVER NICKEL.
SS16M1F	GOLD FLASH PLATING OVER NICKEL.
SS16M1G10	10μ"GOLD PLATING OVER NICKEL.
SS16M1G15	15μ"GOLD PLATING OVER NICKEL.
SS16M1G30	30μ"GOLD PLATING OVER NICKEL.



SECTION A-A



SECTION B-B

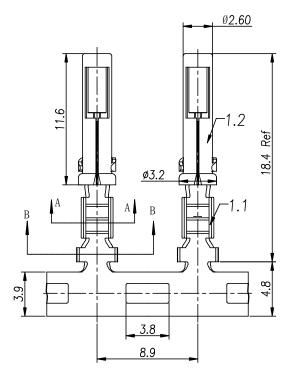

REV

B1

ECO

REVISIONS

DESCRIPTION

RELEASED DRAWING

APPR

TITLE: ECO-MATE, SOCKET CONTACT, STAMPED, 16-18AWG, SIZE 16

SS16M1XX

REV: B1 SH:

BY

JAN-18-2014 ARROW TOMMY

DATE



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Standard Circular Contacts category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

RC16M23J 133780-1 RM20M13D28 RM24M9D28 MS3474W10-6P L/C ELVP16100E 164-901-CD EN3545007SCE

BV002BSQ20049CZ BV002SSQ160404CZ 1900ND05S1B00B 192900-0061 192900-0575 192900-0718 166566-1 1900ND04S1X00D

192900-0058 192900-0309 ST-JL05-16S-C3-100 ST-JL05-20S-C1-100 ST-JL05-20S-C2-100 T01-CRIMP-S03 APK-SA16A07-002 CONT-JL05-08S-C2-10 RC16M-23T RFD26L-1D28 BV002ASJ16049CW JN1-22-20S-R-PKG100 031-50565 ELFH08251 SJS861301M ST-JL05-16S-C1-100 ST-JL05-20P-C1-100 82911466K ESLM03200 192991-0087 192900-0570 ELFH07251 44-104-10003-02 T3P16FC3LZ ST-JL05-16S-C2-3500 ZP-4016-10NF CONT-JL05-12P-C1-10 RM20M12G8D28 031-50676 12115010110 RJFTVC2MG CAP-DACMDPC2 031-50675-002 CAP-DD1FDPC2