



Telaire Accessories

Calibration Kits,
Enclosures, Software,
Cables



Calibration Kits

The Calibration Kit Model T2075NG includes all of the necessary components for calibrating the Telaire® 7001 and Ventostat 8000 and 8100 series models. The kit is housed in a carrying case with only one replacement part (calibration gas (not supplied)) required. A 16 liter gas bottle (not supplied) can perform up to 20 calibrations. Calibration Kit Model T2076NG calibrates the Vaporstat 9002.

Accessory Enclosures

Telaire offers four enclosures to expand the Ventostat and Vaporstat installation options: Model T1508 Aspiration Box, Model T1505 Splash Resistant Enclosure, and Model T1551 and T1552 Outdoor Air Enclosures.

Software

Windows based VG Graphing Software allows you to easily download your IAQ measurements and customize graphs.

2080 CO₂ View Logging Software

CO₂ View is a Windows based program that interfaces with the 7000 series. This easy to use program displays and graphs real-time CO₂ levels at a user adjustable interval.

UIP T2090

Modify your 8000 series (T8100, T8200, T8300).

7001 Accessories

The Telaire 7001 hand held CO₂ and temperature monitor is equipped with an output for recording data. The cable, Model T2070, can be used with devices that accept a 0 to 4V signal.

A relative humidity and datalogging kit with graphing software, Model T2077, is available for long term monitoring.

Part 62933 is an adapter for international operation.

Amphenol
Advanced Sensors

Calibration Kits

T2075NG and T2076NG

Calibration Process

The calibration is simple and can be done in just a few minutes. Each CO₂ model has a calibration process similar to the following:

- Connect the tubing assembly to the sensor and connect the regulator to the gas bottle.
- Initiate the calibration process by using the sensor buttons and display.
- The process is automatically run by the sensor and will signal upon completion.
- Last, disconnect the tubing and gas regulator.

T2075NG Components

The Calibration Kit Model T2075NG includes:

- Instruction sheet
- Tubing assembly
- Gas regulator with gauge
- Carrying case.

Calibrates the following models:

- Ventostat 8000 and 8100 Series
- Telaire 7000 Series
- Use in conjunction with UIP software for T8000 series (T8100, T8200, T8300)



The illustration shows the complete set-up for calibrating a sensor with display.

*Nitrogen gas not included.

Requires disposable gas tank: CGA600, 99.95% Nitrogen 20 bar fill pressure, approximately one liter.

T2076NG Components

The Calibration Kit Model T2076NG includes:

- Instruction sheet
- Tubing assembly
- Gas regulator with gauge
- Carrying case.
- Flow Meter

Calibrates the following models:

- Vaporstat 9002

*Nitrogen gas not included.

Requires disposable gas tank: CGA600, 99.95% Nitrogen 20 bar fill pressure, approximately one liter.

Enclosures Specifications

Enclosures are compatible with all Ventostat 8000 series (except the 8003 and 8009) and Vaporstat 9002 models.

T1508 Aspiration Box


The Model 1508 is designed for in-duct sampling of CO₂ concentrations at flow rates greater than 400 fpm. Clear cover allows for observation of the sensor. Enclosure is screwed to the duct with probe inserted into airstream. Air sampling probe is 1 in (25.4 mm) diameter and 8 in (203.2 mm) long. Enclosure (ABS plastic) has knockouts for conduit connection. CO₂ Sensor not included.

T1505 Splash Resistant Enclosure

The Model 1505 is designed to protect the sensor in damp or wet environments which might occur in agricultural, industrial or food processing environments. This enclosure (ABS plastic) is designed to protect the sensor from dripping or sprayed water. The transparent cover allows for viewing of the sensor/display. Four diffusion ports allow for entry of CO₂. Knockouts are provided for conduit connection. Response time of the sensor is slowed to approximately 30 minutes to measure a 90% step change in concentrations. Enclosure is designed to screw directly to a wall. CO₂ sensor not included.

T1551 Outside Air Enclosure

The Model 1551 is a rugged weatherproof enclosure (ABS plastic), designed to allow the 8000 series sensor to operate in an outdoor environment and/or where ambient temperatures are below freezing. The 1551 is ideal for monitoring outside air or CO₂ as a surrogate for combustion fumes in parking garages, tunnels and loading docks. This enclosure features a temperature control circuit and internal heaters to maintain the sensor within its normal operating temperature range, even if temperatures outside the enclosure are as low as -20°F (-29°C). Four diffusion ports allow for entry of CO₂. Response time of the sensor is slowed approximately 30 minutes to measure a 90% step change in concentrations. Enclosure is designed to screw directly to a wall. CO₂ sensor not included.

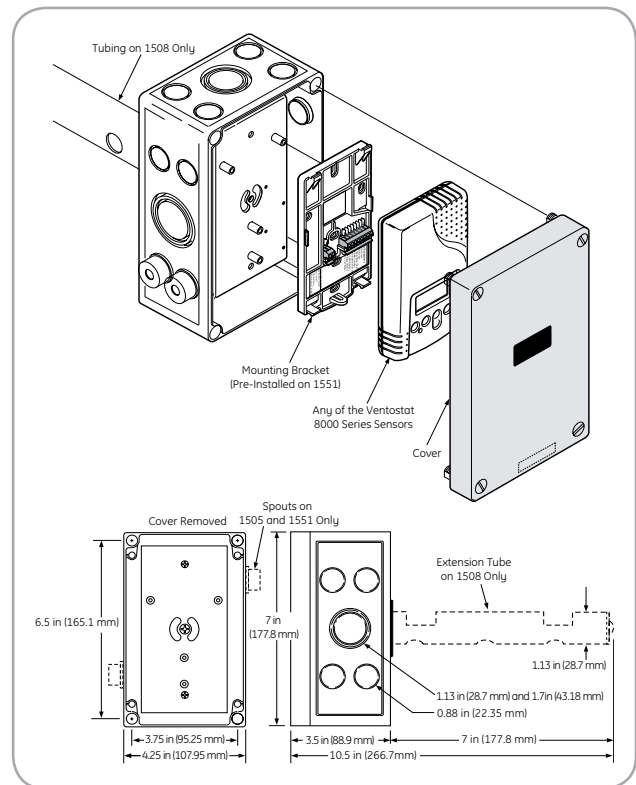

T1552 Outside Air Enclosure

The Model 1552 is a rugged weatherproof enclosure (ABS plastic), designed to allow the 8000 series sensor to operate in an outdoor environment and/or where ambient temperatures are below freezing. The 1552 is ideal for monitoring outside air or CO₂ as a surrogate for combustion fumes in parking garages, tunnels and loading docks. This enclosure features a temperature control circuit and internal heaters to maintain the sensor within its normal operating temperature range, even if temperatures outside the enclosure are as low as -20°F (-29°C). Four diffusion ports allow for entry of CO₂. Response time of the sensor is slowed to approximately 30 minutes to measure a 90% step change in concentrations. Enclosure is designed to screw directly to a wall. CO₂ sensor not included. Power consumption is 24V, 1.5 Amp (max), and includes the Ventostat 8000 series.

Power Consumption

24V, 1.5 Amp (maximum) – including sensor

Software

T2072 and T2080

Software Compatibility

Windows 7

Product Supporting

Telaire 7001, all 8000 Series Products, 6003 Module

Functionality

- Log and Graph CO₂ Levels (Sequential Record, No Time Stamp)
- Store Logged Files to a .TXT format for use with other programs
- Perform Zero and Span Calibration On Telaire's 8000, 7001 and 6000 series sensors

Connection Port

PC RS-232 Port, Telaire Product RJ45 Connector (Cable P/N 62285 available)

62285 Connection Cable


Telaire Part No. 62285

Graphing Adjustments

- Sample Time Interval
- Number of Measurements Displayed
- Display Maximum/Minimum
- Display Mean
- Display Standard Deviation
- Display Best Fit Line

Ventostat UIP Software (T2090)

The Ventostat UIP software allows you to modify the standard settings on the T8100, T8200 and T8300 series products.

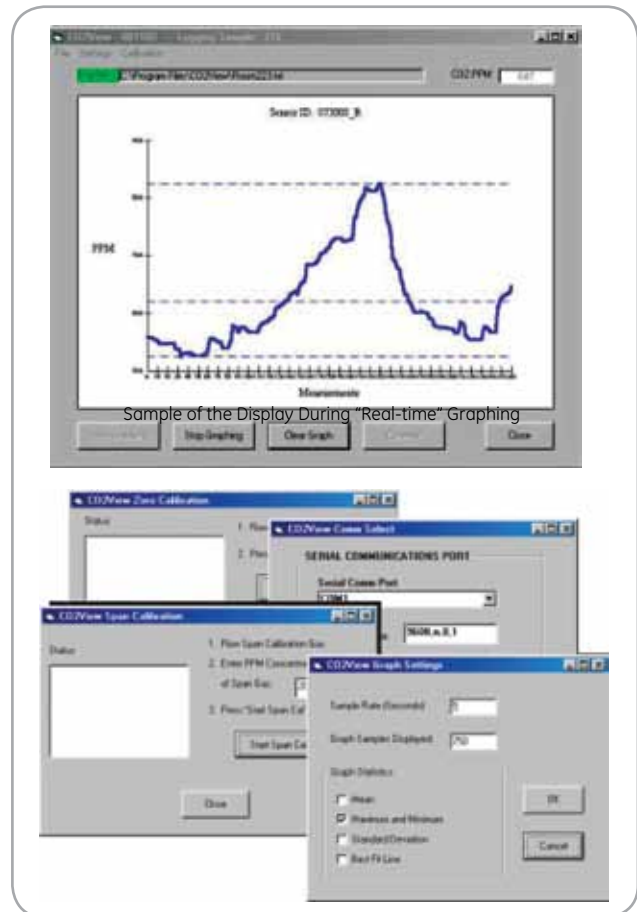

Sample of the Display During "Real-time" Graphing

The software features:

- Altitude adjustment for maximum accuracy performance
- Analog output adjustment
- Single point and span gas calibration
- Turn on and off ABC Logic™
- Change temperature display units
- Graphing and logging of CO₂, temperature and %RH (H Versions only)

The software can be used by distributors to make modifications to the Ventostat prior to shipping to the customer, as well as to make adjustments in the field. The USB cable supplies power to the Ventostat, negating the need for a separate power supply.

The T2090 UIP software kit is supplied with a USB-to-Ventostat cable and software CD.

Amphenol

Advanced Sensors

www.telaire.com
www.amphenol-sensors.com

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-3188-04/2014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sensor Fixings & Accessories](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[F03-01](#) [SUS304 BINIL](#) [8000-5130](#) [FH-AP1](#) [PH-1-10M](#) [PH-1-20M](#) [PH-2-30M](#) [AC201](#) [R4](#) [ADI-LC3S](#) [EC18-WELL](#) [PBT420-100R](#) [PC-15015](#) [K35-4](#) [A-1923](#) [SS-12143](#) [STA12](#) [AP4-T](#) [PH-1-50M](#) [R6](#) [D01051301](#) [43912557-020](#) [MF-1 D=3.2](#) [BGN-035](#) [E39-L7](#) [ZX-SB11](#) [D01070602](#) [606072](#) [606075](#) [Y92ES12PVC4A10ML](#) [Y92ES12PVC4S5ML](#) [SA9Z-F11](#) [Z49-SF1](#) [ZFV-XMF2](#) [E4R-R12A-CS3M010](#) [28810-2](#) [ZX-SW11E V3](#) [CCS-PL-LDR2-70](#) [E4R-R12A-CS3M020](#) [BS-1T](#) [CHITAN](#) [F03-01](#) [CHITAN](#) [CCS-PD2-1012](#) [ZX-SFW11E V3](#) [PH-2-90M](#) [PH-2-5M](#) [XMLZL008](#) [AC244](#) [28810-1](#) [PH-1-40M](#) [SS-12225](#) [32043-500](#)