


REV. STATUS SHEETS	REV. LTR.	-				REVISIONS		
	SHEET NO	1			LTR	DESCRIPTION	DATE	BY
						Released	9/01/94	JCL

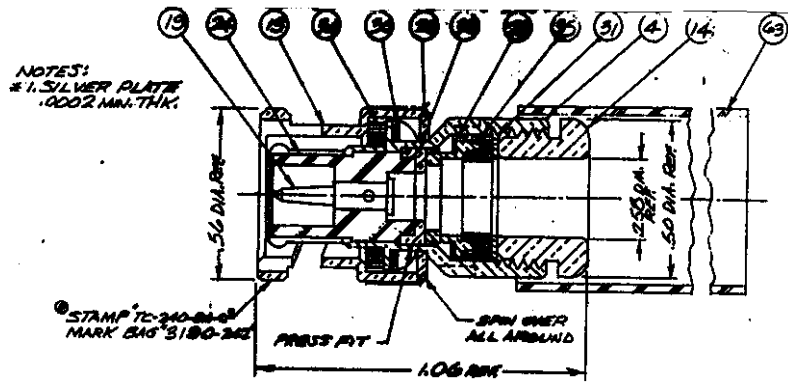

Materials & Finishes

Center Contact: Gold Plated Brass
 Outer Contact: Silver Plated Beryllium Copper
 Other Metal Parts: Silver Plated Brass
 Dielectric: Teflon
 Gasket: Silicone Rubber

Electrical Properties

Impedance: 50 Ohms
 Working Voltage: 500 Volts (RMS max)
 VSWR: 1.25:1 (max) up to 1 GHz
 Insertion Loss: <0.10 dB up to 1 GHz

Unless otherwise specified dimensions in inches. Tolerances are applicable when specified.	Approvals			TIMES MICROWAVE SYSTEMS Wallingford, CT 06492		
	Drawn	JCL	9/01/94	TC-240-BMC Type BNC male Clamp Connector for LMR-240		
	Check					
	PrjMg			Size	Code Ident	Dwg.No.
	PrdMg			A	68999	3190-242
	QAMgr	RTH	9/01/94	Scale: NA		Sheet: 1 of 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Connector](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[0025-262-542](#) [0025-264-3014](#) [58-570121-04S](#) [0134-202-1200](#) [0134-207-1206](#) [0134-207-1800](#) [0134-207-2207](#) [0134-213-0806](#) [0134-213-1007](#) [0134-213-1009](#) [0134-213-1208](#) [0134-213-1800](#) [0134-213-2209](#) [0025-258-000](#) [015-9516-002](#) [60-042722-19P](#) [0114-201-1278](#) [602GB06EG24-61SN](#) [0134-201-1207](#) [0134-201-1806](#) [0134-201-2006](#) [0134-201-2007](#) [0134-201-2010](#) [0134-202-1400](#) [0134-207-0809](#) [0134-207-1208](#) [0134-207-2009](#) [0134-213-1006](#) [6104-207-2302](#) [6104-208-1902](#) [6131-202-19149P](#) [6131-204-21149P](#) [6131-207-13149P](#) [6131-208-13149P](#) [6131-209-17149P](#) [6131-210-11149P](#) [6131-211-19149P](#) [6131-216-19149P](#) [6131-220-25149P](#) [6131-259-11149P](#) [6131-259-21149P](#) [6131-259-23149P](#) [6131-263-19149P](#) [6131-265-17149P](#) [6131-265-19149P](#) [CS3102A-20-15P](#) [CS3102A-20-15S](#) [CS3102C18-4P-472](#) [CS3106A-20-29P](#) [CS3106A-20-74P](#)