
THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1								
LTR	DESCRIPTION	DATE	BY					
-	Released	3/14/00	JCL					

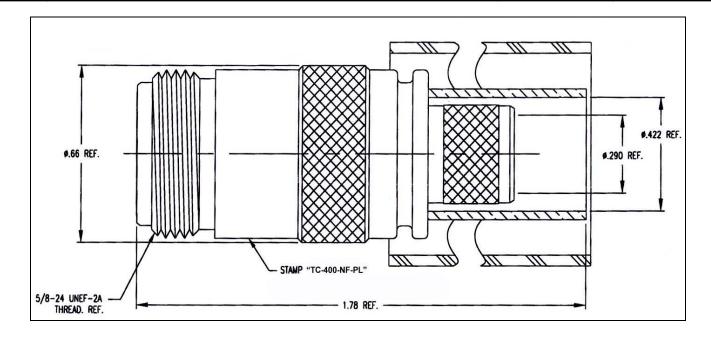

I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper

outer contact: Nickel Plated Brass

body: Nickel Plated Brass

crimp sleeve: Nickel Plated Copper

dielectric: Teflon® PTFE gasket: Silicone Rubber

shrink sleeve: Adhesive Lined Polyolefin

crimp size: .429" hex

II. ELECTRICAL PROPERTIES

impedance: 50 ohms

working voltage: 1000 vrms (max) vswr: 1.25:1 (max) up to 3 GHz insertion loss: $0.1 \times \sqrt{\text{Fghz}}$

Unless otherwise spec- ified, dimensions are in inches. Tolerances are applicable when spec-	Annrovals			TIMES MICROWAVE SYSTEMS Wallingford, CT 06492					
ified.	Drawn	JCL	3/14/00	(203) 949-8400; (203) 949-8423.Fax www.timesmicrowave.com					
These drawings and specifications contain proprietary information				TC-400-NF-PL Type-N Female (jack) for LMR-400-LLPL Cable					
which is the property of									
Times Microwave				Size	68999		Drawing	rawing No.:	
Systems.				Α			3190-964		
				Sca	le: NA	Re	v. (-)	Sheet: 1 of 1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Connectors / Coaxial Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

8915-1511-000 89674-0827 6001-7071-019 6002-7051-003 6059674-1 619550-1 630059-000 M39030/3-01N 6500-7071-046 6769

CX050L2AQ 7002-1541-010 7002-1542-011 7002-1572-002 7003-1542-011 7004-1512-000 7009-1511-004 7010-1511-000 7029-1511-060 7101-1571-002 7145-1521-002 7203-1571-003 7209-1511-011 7210-1511-015 7210-1511-019 73137-5015 73216-2241 73404-2300 7405-1521-005 7405-1521-802 8527 8547 FS11V 9049-9513-000 9074-9513-000 9101-9573-002 910A205F 9130-9573-002 PL11SC-026 PL375-33 PL40-5 PL74C-221 PL75MC-217 PL803-7 980-8666-005 1200690078 1-201144-1 R107003010W

R110A172100