Amphenol[®]



UPT Connector Series

www.amphenol-industrial.com

Company Overview

Manufacturing connectors since 1932, we take pride that Amphenol Industrial Operations is the undisputed leader in interconnect systems for harsh environment applications. Such applications require a high degree of engineering sophistication and precision manufacturing capability. Innovations like our RADSOK® contact technology can provide roughly 50% more current through the same size pin. Connectors utilizing this RADSOK® technology will outperform similar products in the market hands down.

Amphenol Industrial Operations (AIO), a division of the Amphenol Corporation, is the leading manufacturer of cylindrical connectors in the world. Amphenol Industrial's product lines consist of rectangular, standard miniature, fiber optic, EMI/EMP filter, and a variety of special application connectors.

Headquartered in Sidney, NY, AIO's facility is nestled at the foothills of the Catskill Mountains, and over 307,000 ft². This complex houses over 1,000 employees, incorporating state-of-the-art manufacturing technologies. The facility is both ISO9001 certified and qualified to MIL-STD-790 requirements. Other satellite manufacturing/assembly facilities are located in Nogales, Mexico (25,000 ft²) and Zhuhai, China with (276,000 ft²).

Our manufacturing capabilities include state-of-the-art CNC machining, die-casting, molding, impact and extruding, plating, screw machining and process controls.

AIO also has a fully equipped material evaluation lab and an engineering support organization utilizing the latest in computer aided design software and analysis tools.

Amphenol Industrial Operations is supported by several satellite plants and one of the largest distributor networks in the world.

The UPT Connector Series

Amphenol Industrial has expanded its PT Series product line with a new plastic bayonet connector. The UPT provides more options for industrial interconnect markets that do not require a metal shell or Mil-Spec equivalents.

Based on the 26482 Series I, UPT is a plastic shell interconnect with a metal bayonet coupling system and crimp contacts. Featuring a light weight design, smaller footprint and easy field installation the UPT is a cost effective industrial connector solution.

- Contact Sizes and Arrangements: 12 & 16 Stamped & Formed crimp contacts, three insert arrangements available (16-19, 24-32, & 24-48)
- Intermateable with Souriau TrimTrio, UTO, and ITT Trident Ringlock
- · Wall Mount, Jam Nut, and Straight Plug Shell Styles
- · Plastic Shell, Light Weight
- · Metallic Bayonet Coupling, Molded Ring on Receptacle
- Quick Connect/Disconnect
- · Multiple backshell sealing accessories
- · RoHS compliant

The markets and application for the UPT connectors Included but are not limited to the following:

- Heavy Equipment
- EV, HEV, BMS
- Automation & Robotics
- Telecom Equipment
- Servo Motor
- Machinery






Technical Data							
Rated Current Contact #16	13 Amps						
Rated Current Contact #12	23 Amps						
Operating Voltage	250VAC						
Withstanding Voltage	2000V DC						
Insulation Resistance	5000 Megohms Min.						
Operating Temperature	-55°~+125°						
Ingress Protection	IP67(Mated)						
Flammability	UL 94 V-0						
Durability	500 Cycles						

UPT06D-24-32S


Size 24, 32 Way, Plug

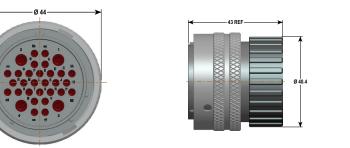

Front Face of Pin Illustrated							
Insert Arrangement	24-32						
Number of Contacts	4	28					
Contact Size	12	16					


UPT00D-24-32P

Size 24, 32 Way, Wall Mounting Receptacle







Recommended Cut-Out




UPT07D-24-32P Size 24, 32 Way, Jam Nut Receptacle







Recommended Cut-Out



UPT06D-16-19S

Size 16, 19 Way, Plug







Front Face of Pin Illustrated							
Insert Arrangement	16-19						
Number of Contacts	19						
Contact Size	16						

UPT00D-16-19P


Size 16, 19 Way, Wall Mounting Receptacle

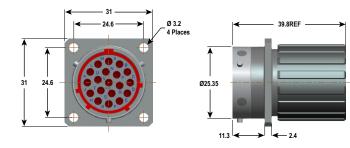

Recommended Cut-Out




UPT06D-24-48S Size 24, 48 Way, Plug

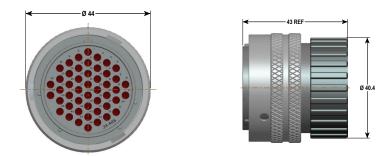



Front Face of Pin Illustrated								
Insert Arrangement	24-48							
Number of Contacts	48							
Contact Size	16							

UPT00D-24-48P


Size 24, 48 Way, Wall Mounting Receptacle









UPT07D-24-48P Size 24, 48 Way, Jam Nut Receptacle







Recommended Cut-Out




Size 12 contact profile





Size 16 contact profile



Contact part number and quantity per reel

C10-731535-161R	SOCKET CONTACT, SIZE 16, crimp 16AWG, Tin plating (3000 contacts per reel)
C10-731536-201R	SOCKET CONTACT, SIZE 16, crimp 20AWG, Tin plating (3000 contacts per reel)
C10-731535-163R	SOCKET CONTACT, SIZE 16, crimp 16AWG, Gold plating (3000 contacts per reel)
C10-731536-203R	SOCKET CONTACT, SIZE 16, crimp 20AWG, Gold plating (3000 contacts per reel)
C10-731537-161R	PIN CONTACT, SIZE 16, crimp 16AWG, Tin plating (3000 contacts per reel)
C10-731538-201R	PIN CONTACT, SIZE 16, crimp 20AWG, Tin plating (3000 contacts per reel)
C10-731537-163R	PIN CONTACT, SIZE 16, crimp 16AWG, Gold plating (3000 contacts per reel)
C10-731538-203R	PIN CONTACT, SIZE 16, crimp 20AWG, Gold plating (3000 contacts per reel)
C10-737341-121R	Pin contact size 12, crimp 12 AWG, Tin plating (1000 contacts per reel)
C10-737343-121R	Socket contact size 12, crimp 12 AWG, Tin plating(1000 contacts per reel)

How to order:

Dreduct		0			Insert Pattern				Orace Median						
Product Series	Connector Type		Shell Type		Shell Size			Contact		Cross Mating Proof		Shell Plating		Black Shell	
	00	Wall mounting receptacle	М	Metal Shell	10	4 Size 16 Contacts	Р	Pin	Omit	Normal Key	Omit	Nickel plating 48H salt spray	Omit	With grommet and nut	
	06	Plug	D	Dielectric Shell (Plastic)	12	8 Size 16 Contacts	s	Socket	W	Key/W	1	Black Zinc plating 96H salt spray	N	No rear accessory	
UPT	07	Jam nut receptacle			14	12 Size 16 Contacts			x	Key/X	2	Tin plating 720H salt spray for die casting shell			
					16	19 Size 16 Contacts			Y	Key/Y		(Zinc-Nickel plating only for aluminum alloy coupling nut)			
					18	23 Size 16 Contacts			Z	Key/Z					
					22	35 Size 16 Contacts									
					24	48 Size 16 Contacts									
					24	32 (4 Size 12 + 28 Size 16 Contacts)									



AMPHENOL CORPORATION Amphenol Industrial Phone: 888-364-9011 191 Delaware Avenue

www.amphenol-industrial.com

Sidney, NY 13838-1395

IB-7-1

Notice: Specifications are subject to change without notice. Contact your nearest Amphenol Corporation Sales Office for the latest specifications. All statements, information and data given herein are believed to be accurate and reliable but are presented without guarantee, warranty, or responsibility of any kind expressed or implied. Statements or suggestions concerning possible use of our products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that all safety measures are indicated or that other measures may not be required. Specifications are typical and may not apply to all connectors.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Extraction, Removal & Insertion Tools category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below :

M8196914-08 768211-2 809-131 844751-2 8-59558-2 91018-1 12014013 12093647 1-21048-0 R282867020 12093078 12180559 1-21048-6 12121897 DCF.91.405.5LT 1322 13549852 15314260 15313892 15350698 15350707 15430130 1643916-1 1-679532-0 1976593-3 OUTEXT-0321 2-1579008-3 2-1579008-4 229694-7 231106-1 241469 91040-3 91040-7 965004-000 965069-000 1738219-1 ET-JL05-16 FG 0300 146 3000 FIT-6 210S048 2-1579007-9 231879-1 CF-008025-000 312138-3 RJ11FODE 356-162 M8196914-10 4-1579018-0 483249-1 5-1579007-2