

ExpressPort® QSFP+

Amphenol ICC's ExpressPort® QSFP+ interconnect system is comprised of a 38 position 0.8mm pitch SMT connector, and a press-fit cage. With four channels of data in one pluggable, the system interface is capable of transferring data up to 16Gb/s per Channel, and replacing up to 4 standard SFP+ receptacles. These features result in greater port density and overall cost savings over traditional SFP+ products. Supporting standards include, Gigabit Ethernet, InfiniBand, and SONET/SDH with different data rate options. ExpressPort® QSFP+ includes cages in single, ganged and stacked configurations with multiple heat sink options supporting various thermal requirements and port status with light pipes options.



TECHNICAL INFORMATION

MATERIAL

- Housing: Black color, Glass reinforced, Lead
 Free Solder Reflow Process Compatible Thermo
 Plastic
- Contacts Base Material: Phosphor Bronze
- Plating Solder Tails: Matte tin
- Plating Mating Area: Gold
- Resonance Dampening Feature: Conductive Polymer

MECHANICAL PERFORMANCE

- Durability: 250 mating cycles
- Mating Force: 40 N max.
- Contact Normal Force: 50 grams min.
- PCB Thickness Single Side (Cage): 1.44 mm (0.057in.) min.
- PCB Thickness Belly to Belly (Cage): 2.85 mm (0.093in.) min.
- Unmating Force (Cage): 30 N max.
- Insertion Force to PCB (Cage):
- 780 N for 1 port
- 1000 N for 2 Ports
- 1700 N for 4 Ports
- 2400 N for 6 Ports

ELECTRICAL PERFORMANCE

- Operating Voltage: 30 VDC per contact
- Operating Current: 0.5 A per contact
- Differential Impedance: $100\Omega + / 10\Omega$

ENVIRONMENTAL

- Operating and (Storage) Temperature: -40° to +85° C
- RoHS & Halogen-Free

TOOLING INFORMATION

- Cage Mounting: Behind Bezel, Thru Bezel, Hybrid
- EMI Options: Spring Fingers, Gasket
- Configurations:
 - 1XN (N=1,2,3,4,6)
 - 2XN (N=1,2,3)

TARGET MARKETS/APPLICATIONS




Network Interface Cards SAN-Storage Attached Networks



Hubs HBA Router Switch Servers

ExpressPort® QSFP+

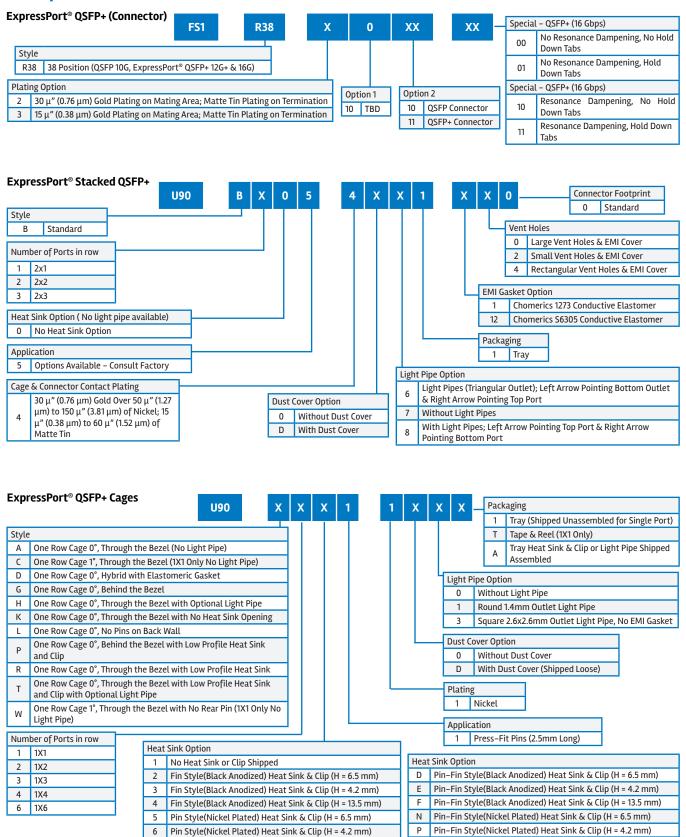

Pin Style(Nickel Plated) Heat Sink & Clip (H = 13.5 mm)

Pin-Fin Style(Nickel Plated) Heat Sink & Clip (H = 13.5 mm)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for I/O Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

571763P 58098-0628 D20419-211 D38999/20FJ24PA L/C D38999/20FJ29SB L/C D38999/24FG11SN L/C 72.250.1628.2 72.250.2428.2 74720-0505 76.350.0729.0 76871-1403 FCN-244F080-G/1 FCN-260A9920 FCN-268D024-G/2F#10X-R10 PCS-E50FA PCS-XE26LKA PCS-XE26MA+ PCS-XES68MS+ G38A71314B DX40-50P(55) 1571250010 157-22500-3 MS3471L14-19P L/C 1888020-8 91-569786-35H 91-569786-35M 91-644626-35P SM3100F14S-58S 172501-4002 172501-6002 FCN-260C008-A/L0 FCN-260C024-AL0 FCN-261Z008 FCN-268D008-G/1K 2000314-1 200331-1 2007498-2 PCR-E28LMDAG1+ PCR-E36FC+ PCS-E28FS+ PCS-XE26SLFD+ PCS-XE26SLFDT+ G38A71214B HDRA-E68W1LFDTC-SL+ HDR-E14MSG1+ R88A-CNK81S CRT1-ATT02 54182-0605 U90B2054081210 UE86K842720321