


CFP2

Amphenol ICC's CFP2 series offers a 104 position, 0.6mm pitch connector designed to be compatible with 100Gb/s Form Factor Pluggable (CFP) Multi-Source Agreement for Ethernet and other applications. It is used in multi-hundred Gb/s systems and is comprised of insert molding assemblies for top contacts and press-fit cage assemblies. Rated for 25Gb/s per channel with resonance dampening for improved signal integrity, CFP2 has up to 60% lower power consumption versus CFP. An optional riding heat sink ensures proper thermal dissipation. Compatible with IEEE and ITU-T applications, the CFP2 footprint is compliant with other industry suppliers.



TARGET MARKETS

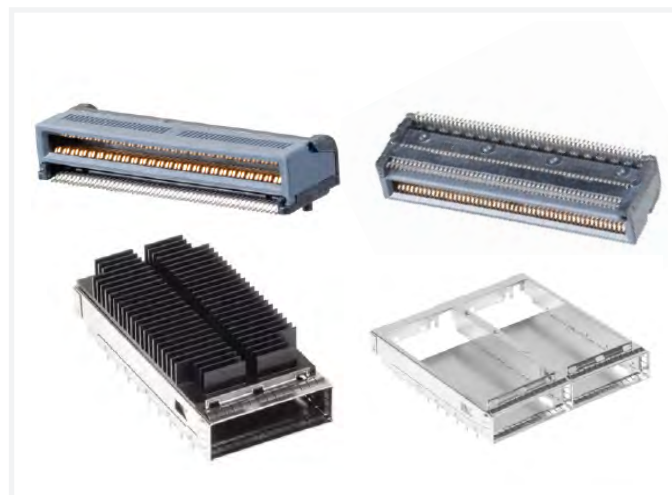

TECHNICAL INFORMATION

MATERIAL

- Housing: Black color, Glass reinforced, Lead Free Solder Reflow Process Compatible Thermo Plastic
- Contacts Base Material: Phosphor Bronze
- Plating Solder Tails: Matte tin
- Plating Mating Area: Gold
- Resonance Dampening Feature: Conductive Polymer

MECHANICAL PERFORMANCE

- Durability: 200 mating cycles
- Mating Force: 80 N max.
- Contact Normal Force: 40 grams
- PCB Thickness (Cage): 3.00 mm (0.118 in.)
- Unmating Force (Cage): 50 N
- Insertion Force to PCB (Cage): 2 port – 2000N max.

ELECTRICAL PERFORMANCE

- Operating Voltage: 3.3 V DC per contact
- Operating Current (per power pin): 0.5A maximum (Class 4 or lower) / 1.25A maximum (Class 5 and 6)
 - Please contact the manufacturer for specific requirements over 0.5A per pin
- Operating Current (per signal pin): 0.5A maximum
- Differential Impedance: 100Ω +/- 10Ω

ENVIRONMENTAL

- Operating and (Storage) Temperature: -40°C to +85°C
- RoHS & Halogen-Free

TOOLING INFORMATION

- Configurations: 1X1, 1X2

TARGET MARKETS/APPLICATIONS




Metro Area Networks




Carrier Networks and Data Centers
Large Data Center Campus Connectivity

PART NUMBER SELECTOR

CFP2 Connector

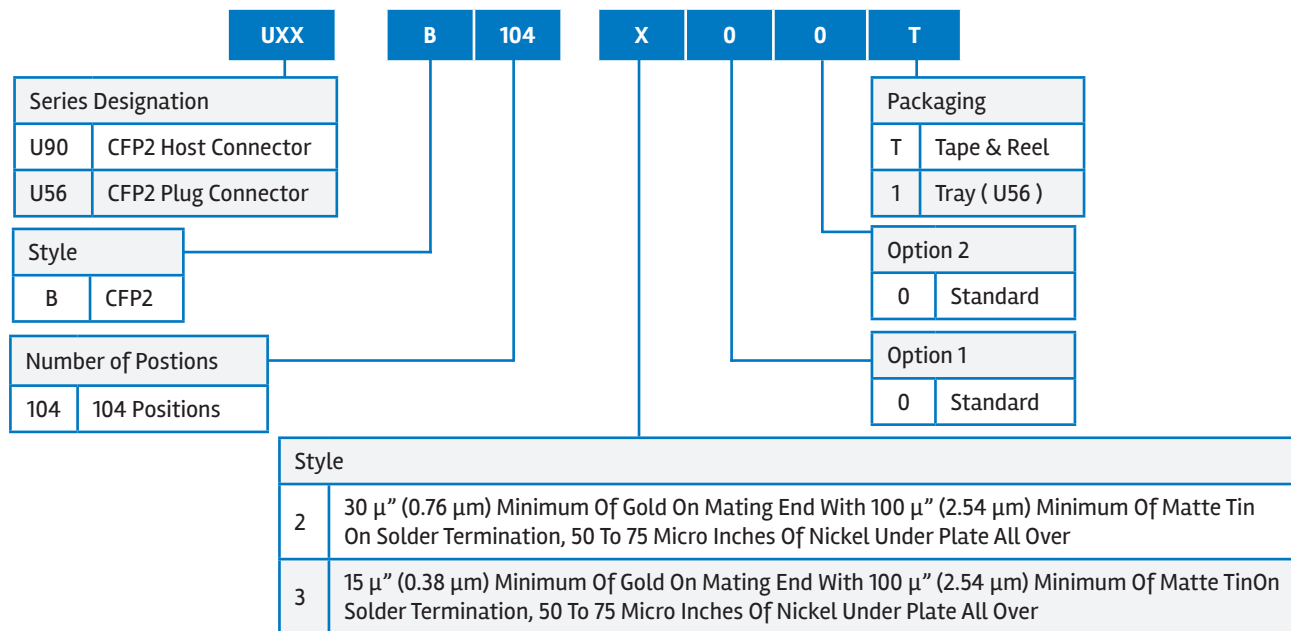

CFP2 Cage

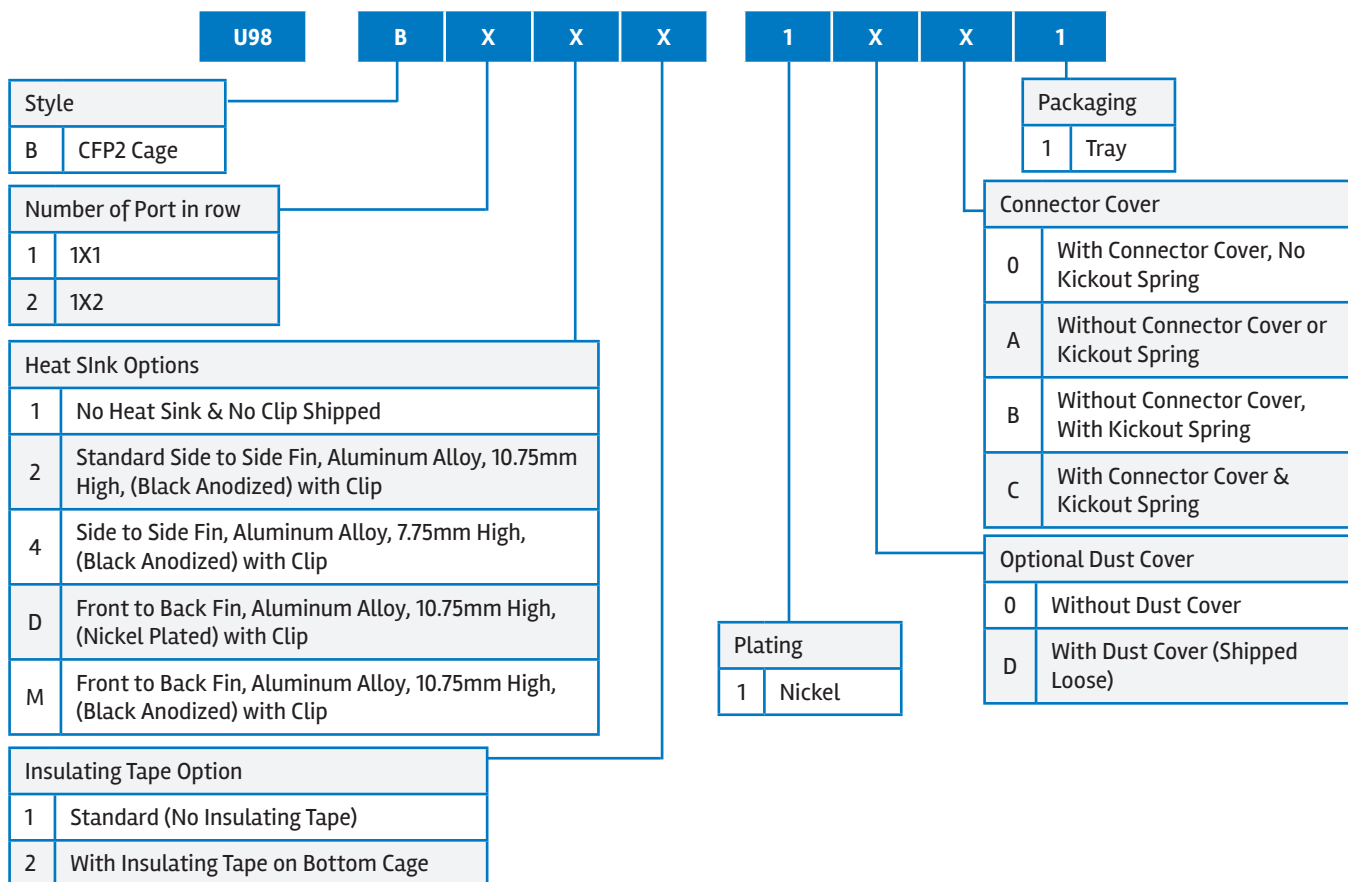

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Connectors](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[571763P](#) [58098-0628](#) [72.250.1628.2](#) [72.250.2428.2](#) [74720-0505](#) [76.350.0729.0](#) [76871-1403](#) [FCN-244F080-G/1](#) [FCN-260A9920](#) [MP-5T180MUNNA-005](#) [PCR-E36PM](#) [PCS-XE26MA+](#) [G38A71314B](#) [1571250010](#) [157-22500-3](#) [MS3471L14-19P L/C](#) [192991-0703](#) [172501-4002](#) [172501-6002](#) [FCN-260C008-A/L0](#) [FCN-260C024-AL0](#) [FCN-261Z008](#) [2000314-1](#) [200331-1](#) [PCR-E36FC+](#) [PCS-E28FS+](#) [PCS-XE26SLFD+](#) [PCS-XE26SLFDT+](#) [G730VID08BDC24](#) [HDR-E14MSG1+](#) [U90B2054081210](#) [UE86K842720321](#) [38113800006](#)
[DP3AR020WQ1R200](#) [Z4.102.0680.0](#) [500-1040](#) [500-1052](#) [500-1054](#) [ZP-4008-66L](#) [0709821002](#) [DX40-20P\(55\)](#) [5554841-1](#) [MS3474W18-8P-LC*](#) [SM3106F14S-7S-LC](#) [U90B3054061110](#) [U65-E04-4020](#) [ZPF000000000097891](#) [557-262M2-06C](#) [747360449](#) [10099439-003C-TRLF](#)