

SFP

Amphenol ICC's SFP product family supports applications for up to 6Gb/s per channel. The connector accepts multiple transceivers per INF-8074i and combines, transmits, and receives functions in a low cost, compact format. The assemblies are designed to maximize valuable space on the PCB. The cages have a two-piece construction with enhanced transceiver mating tabs available in a Press-Fit version or a solder tail version. Light pipes are designed to deliver a "link" or "no link" status using LEDs attached on the PCB.



TECHNICAL INFORMATION

MATERIAL

- Housing: Black color, Glass reinforced, Lead
 Free Solder Reflow Process Compatible Thermo
 Plastic
- Contacts Base Material: Phosphor Bronze
- Plating Solder Tails: Matte tin or gold flash options
- Plating Mating Area: Gold
- Resonance Dampening Feature: Conductive Polymer

MECHANICAL PERFORMANCE

- Durability: 250 mating cycles
- Mating Force: 50 N max.
- Contact Normal Force: 100 grams
- PCB Thickness Solder-Post and Press-Fit (Cage):
 1.45 mm (0.057in.)
- PCB Thickness Belly to Belly (Cage): 3.00 mm (0.118in.)
- Unmating Force (Cage): 11.50 N max.
- Insertion Force to PCB (Cage):
- 500 N for 1 port (1x1 cage)
- 1000 N for 2 port (1x2 cage)
- 2100 N for 4 port (1x4 cage)
- 3000 N for 6 port (1x6 cage)

ELECTRICAL PERFORMANCE

• Operating Voltage: 30 VDC per contact

• Operating Current: 0.5 A per contact

• Differential Impedance: $100\Omega + / - 10\Omega$

ENVIRONMENTAL

- Operating and (Storage) Temperature: -55° to +85°C
- RoHS & Halogen-Free

TOOLING INFORMATION

- Configurations:
- 1XN (N = 1,2,3,4,6)
- **2XN (N = 1,2,4,5,6,8)**

TARGET MARKETS/APPLICATIONS



Cellular Infrastructure Network Interface




Hubs Servers Storage





Test and Measurement Equipment



SFP Connector

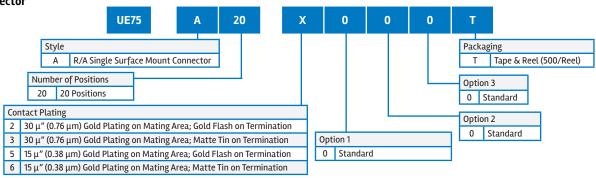

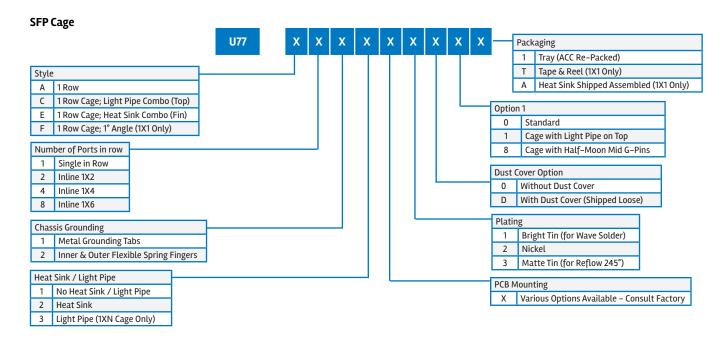

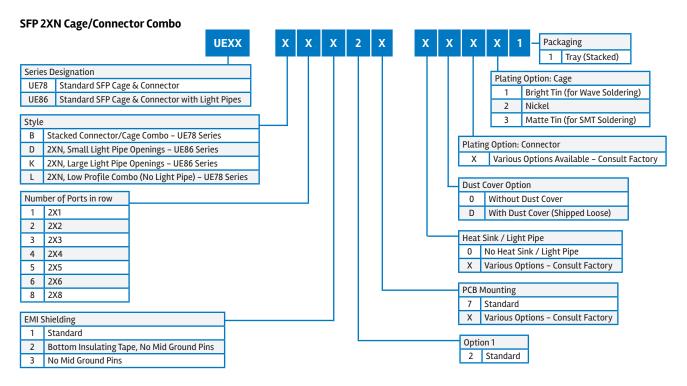

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for I/O Connectors category:

Click to view products by Amphenol manufacturer:

Other Similar products are found below:

571763P 58098-0628 72.250.1628.2 72.250.2428.2 74720-0505 76.350.0729.0 76871-1403 FCN-244F080-G/1 FCN-260A9920 PCR-E36PM PCS-XE26MA+ G38A71314B 1571250010 157-22500-3 MS3471L14-19P L/C 192991-0703 172501-4002 172501-6002 FCN-260C008-A/L0 FCN-260C024-AL0 FCN-261Z008 2000314-1 200331-1 PCR-E36FC+ PCS-E28FS+ PCS-XE26SLFD+ PCS-XE26SLFD+ G730VID08BDC24 HDR-E14MSG1+ U90B2054081210 UE86K842720321 38113800006 DP3AR020WQ1R200 Z4.102.0680.0 500-1040 500-1052 500-1054 ZP-4008-66L 0709821002 DX40-20P(55) 5554841-1 MS3474W18-8P-LC* SM3106F14S-7S-LC U90B3054061110 U65-E04-4020 ZPF00000000000097891 557-262M2-06C 747360449 10099439-003C-TRLF 10137239-0021LF