

Type YM Series

Thermometrics

PTC Thermistors



Description

Thermometrics YM Series consists of a range of radially-wired PTC disc thermistors with silicone resin coating.

Features

- Fast switching times
- Operation up to 265V rms
- Wide range of operating current levels
- Excellent stability
- Fail-safe operation
- Solid state
- High performance barium titanate ceramic
- Suitable for automatic PCB insertion

Applications

- Designed for general purpose over-current, overvoltage and direct over-temperature protection

Packaging

All types in the YM range are available loose-packed, as shown in the drawing. Devices are also available on bandolier (tape & reel): types with diameter a <12 mm comply with IEC 286-2.

To identify the packaging required, replace N in the product codes shown in table as follows:

YM

BandolieredR*
Loose-packedN

YQS

BandolieredAdd T suffix


Pack quantities:

Loose-packed500-2500/box
Bandoliered : 375-1500/reel


*YM120D260N150

*YM120D370N100

Not available taped and reeled

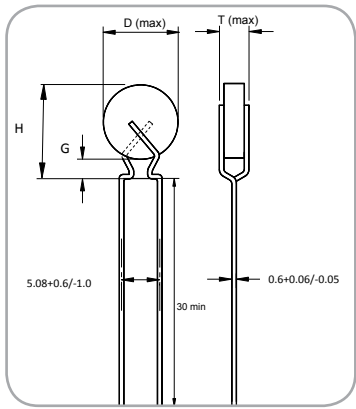

YM Drawing

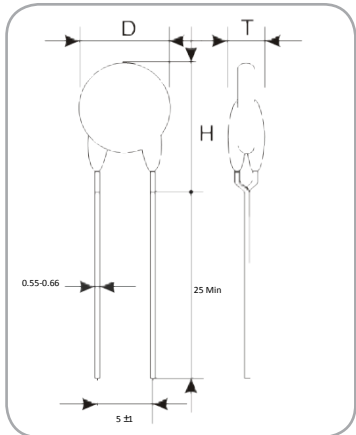

YQS Drawing

Electrical Specifications

Maximum Operating Voltage

265V rms

Switch Temperature

120°C nominal

Tolerance on R₂₅

±20%

Ambient Temperature Range

At Storage: -25 to +155°C

At Maximum Voltage: 0 to +55°C

Lead Wire Material

Tin-coated copper

Body Coating

Silicone resin, black YM, green YQS

Part Number	Replacement for	R @ 25°C Ω	Maximum Current without Tripping (I _{nt}) mA		Minimum Trip Current (I _t) mA		Maximum Overload Current (I _{mo}) A	Maximum Residual Current (I _{res}) mA	D (max) mm	T (max) mm	H (max) mm	G mm
			T=25°C	T=55°C	T=25°C	T=10°C						
YM120C15N182		1800	16	14	23	28	0.1	5	4	5	8	
YM120C20N122		1200	20	17	28	34	0.1	6	4	5	8	
YQS8070	YM120C30N601	600	22	18	40	46	0.2	5	4.5	5	8	
YQS8069	YM120C45N301	300	33	26	55	62	0.2	7	4.5	5	9	
YQS8068	YM120C80N101	100	65	50	98	108	0.4	7	5.5	5	12	
YQS8067	YM120D105N600	60	85	65	131	144	0.6	9	6	4.5	12	
YM120D125N450		45	110	85	155	170	0.7	9	7	4.5	2 +0.5,-1	
YQS8066	YM120D150N330	33	128	99	181	198	0.9	12	7.5	4.5	12	
YM120D170N250		25	161	125	228	250	1.1	10	8.5	4.5	2 +0.5,-1	
YQS8065	YM120D200N200	20	168	130	265	298	1.3	10	9.5	4.5	15	
YM120D260N150		15	234	181	330	362	1.7	12	11.5	4.5	2 +0.5,-1	
YM120D370N100		10	314	243	444	486	2.7	16	14.5	4.5	2 +0.5,-1	

Amphenol
Advanced Sensors

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PTC \(Positive Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Amphenol](#) *manufacturer:*

Other Similar products are found below :

[PTCCL09H251FBE](#) [PTCTL3MR100GTE](#) [PTCCL05H630HTE](#) [B59346A1502P020](#) [B59980C0160A070](#) [PTCTT95R100GTE](#)
[PTCLL05P131TBE](#) [B59841C0135A070](#) [PTCCL09H541DBE](#) [TFPT0805L1800FV](#) [B59725T1120A062](#) [B59116S0225B010](#)
[B59008C0150A040](#) [B59100M1090A070](#) [B59100M1145A070](#) [B59873C0120A070](#) [102PS1G](#) [B59300M1150A070](#) [B59339A1501P020](#)
[B59770B0120A070](#) [B59995C0120A070](#) [YQR100R060](#) [YQS5751PTO](#) [YQS5856PTF](#) [YQS5930PTO](#) [YS5675](#) [YS5918PTO](#) [YQS5898PTO](#)
[YQS5868PTF](#) [YQD100N1000](#) [B59010D1135B40](#) [B59606A110A62](#) [B59807A90A62](#) [B59830C120A70](#) [B59874C120A70](#) [B59960C160A70](#)
[YQD120N0025](#) [PTGL12AS4R7K6B51B0](#) [PTGL12AR270M9C01B0](#) [PTGL12AR100M6C01B0](#) [PTGL09AR390N0B52A0](#)
[PTGL07AS2R7K2B51A0](#) [PTGL07AS1R8K2B51B0](#) [PTS120601B100RPU00](#) [PTGL10AR3R9M3P51B0](#) [PTGL07BD220N3B51B0](#)
[PTGL07AS5R6K4B51B0](#) [PTGL07AS150K6B51A0](#) [PTGL07AR8R2M3P51B0](#) [PTGL07AR560M9A51B0](#)