

T H E R M O M E T R I C S
A C O M M I T M E N T T O E X C E L L E N C E



Thermometrics temperature sensor solutions

Amphenol
Advanced Sensors

Global Excellence in Temperature Sensors

The Thermometrics temperature product line contributes more than 70 years of technology experience in the design and manufacture of high quality sensors to the Amphenol Advanced Sensors portfolio of sensor-based solutions.

Thermometrics pioneered lead frame technology, unifying the probe terminal and thermistor lead into a single constructed metal substrate. This innovation was the building block to today's fully automated volume production process, which ensures the highest degree of quality and performance.

Thermometrics continues to invest in leading edge temperature sensor and sensor packaging technology for the Thermometrics product line, particularly in developing custom solutions for industry and for specific customer application needs. From chips to value-added assemblies and for temperature ranges from -196°C to 1150°C , Thermometrics products play a vital role in measurement, control and protection of industrial- and consumer-based applications worldwide.



High-Performance, Competitively Priced Products for a Wide Range of Applications



- Aerospace
- Anti-icing
 - Environmental control systems
 - Temperature scanning systems



- Transportation
- Engine management
 - Dashboard display sensors
 - Cabin comfort sensors—non-contact infrared, solar and light
 - Circuit protection
 - Safety systems
 - Coolant/transmission fluid pressure/temperature
 - Exhaust gas temperature
 - Air quality
 - Active/passive incar

- Commercial
- High voltage and short circuit protection
 - HVAC
 - Energy management
 - Liquid level detection
 - Telecommunications equipment
 - Computers
 - Office machines



- Industrial
- Circuit protection
 - Temperature measurement and control
 - Liquid level detection
 - High voltage protection
 - Short circuit and other hazard protection
 - Process control
 - Boilers and water heaters



- Consumer
- Electronics
 - Level control
 - Appliances
 - Overload protection
 - Boilers and water heaters
 - Food and beverage

- Healthcare
- Tympanic temperature
 - Heart/lung machines
 - Thermal dilution catheters (heart)
 - Urinary catheters
 - Oral and skin temperature
 - Sleep apnea
 - Esophageal catheters
 - Glucose monitoring
 - Body mapping
 - Oxygen tents
 - Clinical mattresses
 - Humidifiers
 - Anesthesia
 - Fluid heaters
 - Sterilizers
 - Culture ovens
 - Cryogenics



- Calibration Services
- Primary temperature standard
 - NIST calibration services

Critical Information for Real Time Decisions



For Flight

From cabin comfort to test cell systems monitoring, our sensors play a role in temperature measurement for commercial, civil and military aerospace applications—fixed-wing and rotary, and both engine and airframe.

Sensors monitor engine thrust, reliability and emissions in test cells, while also monitoring test cell throughput. In the cabin, our HVAC sensors provide climate control for a comfortable environment while a variety of other sensors monitor temperature in appliances like coffee makers, microwaves and refrigerators.



On the Road

Today's increasingly complex engine management systems rely upon sensors to monitor, measure and control vehicle performance including fuel economy, safety, and control of exhaust emissions.

Our comprehensive product range includes temperature sensors for use in coolant or transmission fluid; high temperature sensors to measure exhaust gas temperature; IR, gas and humidity sensors for cabin comfort; and solar and light sensors.

Our single-piece leadframe construction reduces the number of interconnections and ensures more reliable performance.



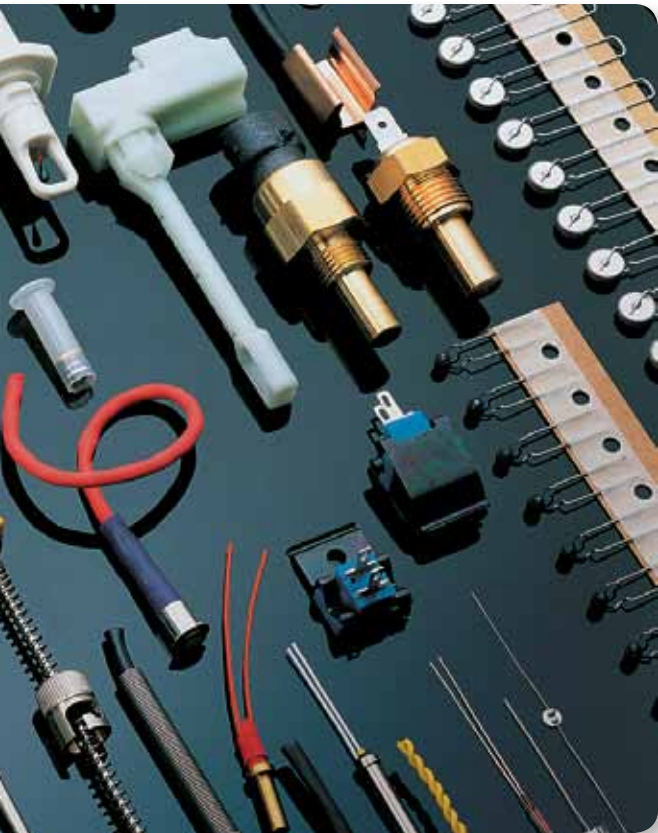
At the Office

Electronic circuitry and sensitive system components demand thermistor protection and control. Our custom-design capability and problem solving expertise mean that we can offer innovative solutions in circuit protection; and temperature measurement and control.

Our sensors excel at applications such as process control energy management, HVAC systems, power supplies, transformers, motor soft start and general time delay units. They are used to control critical process temperature.

Our simple-to-integrate sensors are designed to meet the rapidly changing demands of deregulated and global markets for high-technology sensors.





Around the Home

Today's consumers expect their everyday appliances to deliver reliable and efficient performance. Electronic sensors offer improved accuracy over electromechanical solutions and are designed to perform over a very wide range of temperatures and specifications. Our sensors play a vital part in measuring and controlling the temperature of water, steam, air and food. They are also used for flow measurement, level control, and overload protection and in combination with other sensors for multiple functions.

Temperature sensors can be found all around the home in boilers and water heaters, washing machines, dishwashers, stoves, microwave ovens, irons, toasters, refrigerators and deep freezers.



For Healthcare

We have developed state-of-the-art, high-performance sensors known for their accuracy, reliability and small size. Used extensively for heart catheters, esophageal stethoscopes, fever thermometers, skin sensors, blood analyzers, incubators, respiration monitors and hypodermic needle sensors, they help meet many temperature-related requirements.

Innovative work on small precision sensors continues for cancer research. Thermistors measure the temperature of cells and with precise monitoring, doctors can use heat to destroy diseased cells in tumors.



In the Plant

Our custom-design capability and problem solving expertise mean that we can provide innovative solutions in circuit protection, temperature measurement and control, liquid level detection and gas flow measurement. We have one of the most extensive product ranges of industrial temperature sensors in the world.

With new markets emerging worldwide, our global sensor manufacturing centers meet local content demands and allow us to exceed specific customer requirements. Along with the best manufacturing and test equipment, our strict manufacturing processes and quality procedures ensure the highest standards for your applications.

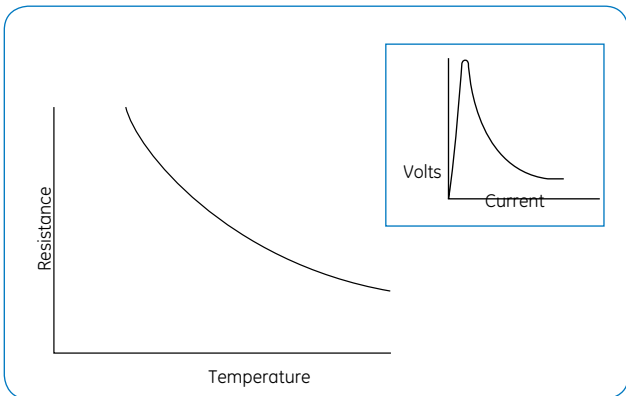
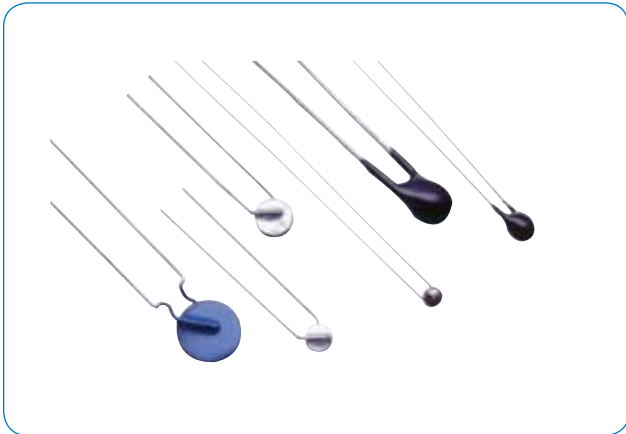


NTC or PTC?

Thermistors are thermally sensitive resistors with either a negative resistance/temperature coefficient (NTC) or positive resistance/temperature (PTC) coefficient. Thermometrics offers a wide range of both types of thermistors from component level through complete assemblies. Both types of thermistors are solid state ceramic components, known for their exceptional quality and long life.

NTC Thermistors

NTC thermistors are manufactured from the oxides of transition metals and can operate over the range of -196°C to 1000°C . Choose an NTC thermistor when a continuous change of resistance with temperature is required.



What are the key characteristics of NTCs?

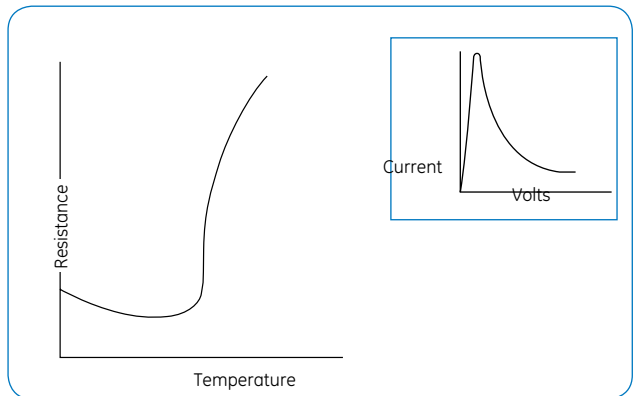
- Defined sensitivity to temperature
- Sensitivity to electrical power input
- Sensitivity to changes in thermal conductivity

What are the main applications for NTC thermistors?

- Temperature measurement and control
- Temperature compensation
- Surge suppression
- Power measurement
- Fluid level-flow detection
- Customized solutions

PTC Thermistors

PTC thermistors are temperature-dependent resistors manufactured from doped barium titanate and are available with transition temperatures from 60°C to 200°C . Choose a PTC thermistor for self reset-capable fuse and heater applications.



What are the key characteristics of PTCs?

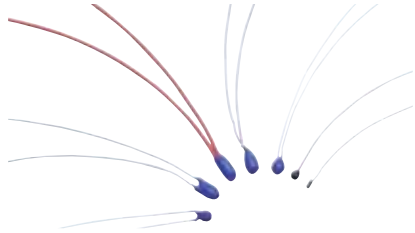

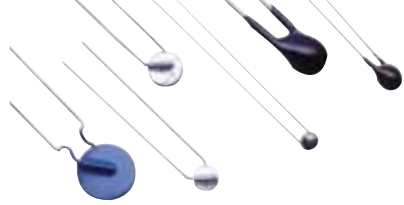

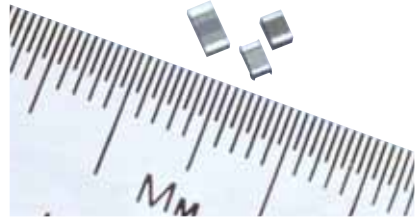
- Large change in resistance at a preset temperature
- Ability to self-regulate temperature
- Current-limiting capability
- Sensitivity to changes in thermal conductivity
- Standard and custom design geometries

What are the main applications for PTC thermistors?



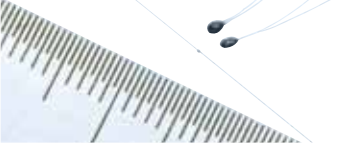


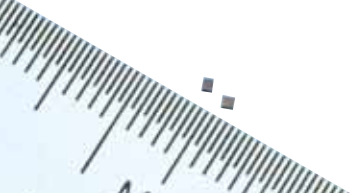
- Over-temperature protection
- Over-current protection
- Surge generation
- Current stabilization
- Fluid level-flow detection
- Self regulating heaters

Thermometrics is a world leader in beta curve selections and high voltage circuit applications.



NTC Thermistors

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
 <p>Epoxy and silicone-coated chip thermistors</p>	TK95 EC95 MF65 SC50 NK C100 NDP NDL DC95 MC65 SC30 ND MS NDK NDM TC	✓	✓			✓	<ul style="list-style-type: none"> Interchangeability options down to $\pm 0.1^\circ\text{C}$ accuracy 0 to 100°C range Head size 0.8 to 2.4 mm Automated assembly 	Automotive engine management, air conditioning, medical, clinical thermometers, blood analysis
 <p>Glass encapsulated DO-35 package</p>	DK GE TH	✓	✓				<ul style="list-style-type: none"> Tmax 300°C Hermatic seal High voltage insulation Bandoliered for auto PCB insertion 	Battery packs, toasters, hair dryers, automotive transmissions, smoke detectors, environmental control
 <p>Discs with radial leads</p>	RL10 RL14 RL20 RL30 RL35/40/45	✓	✓	✓			<ul style="list-style-type: none"> Operation at high currents Wide range of resistance vs temperature curves Custom design 	Automotive engine temperature, temperature compensation
 <p>Discs for inrush current limiting</p>	CL TP T5D			✓			<ul style="list-style-type: none"> Continuous current ratings 1.1 to 16 A Cold resistances 0.7 to 120 W Some UL-approved versions 	Soft start for switch mode power supplies, filament lamp circuits
 <p>Surface mount chips</p>	NHQ NHQM NHQMM TM	✓	✓				<ul style="list-style-type: none"> 0402, 0603, 0805, 1206 sizes Ni barrier terminations Resistance tolerances down to $\pm 1\%$ 	Rechargeable battery packs, LCD temperature compensation

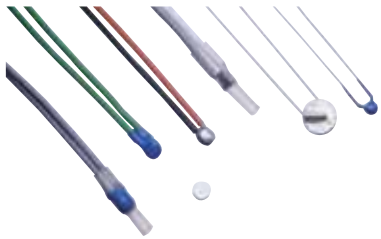
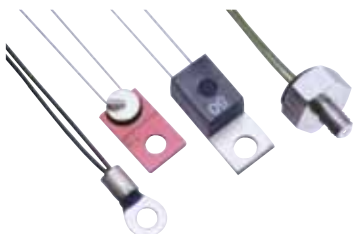
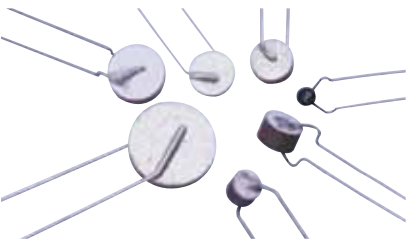

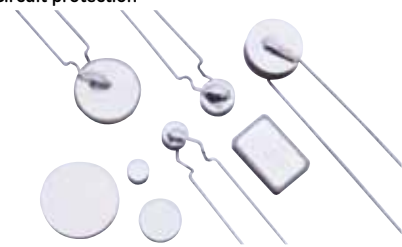
NTC Thermistors

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
Glass-encapsulated surface mount chips 	DKM MELF	✓	✓				<ul style="list-style-type: none"> • Tmax 250°C • Suitable for harsh environments and soldering profiles 	SMD circuitry
Bare bead thermistor 	BB05/07/11	✓	✓		✓	✓	<ul style="list-style-type: none"> • Fast time constant, 0.11 secs • Extremely small size 0.13 to 0.25 mm • High stability 	RF & microwave power measurements
Glass-coated beads 	B05/07/10/14 B35/43	✓	✓		✓	✓	<ul style="list-style-type: none"> • Hermetically sealed • Small size, 0.13 mm to 1.1 mm • Tmax 300°C 	Gas chromatography, thermal conductivity analysis, gas flow measurement, liquid level sensing
Glass-encapsulated beads, rods, probes 	BR11/14/16/23 BR32/42/55 P20/25/30 P60/65/85/100 R60/65/85/100 SP60/65/85/100 FP07/10/14	✓	✓	✓		✓	<ul style="list-style-type: none"> • Robust • Hermetically sealed • Tmax 300°C • Interchangeable matched pairs available • Some models with intermittent operation to 600°C 	Liquid level sensing, gas flow measurement, fluid temperature, pulse suppression
Glass encapsulated chips with leads 	GC32 GC14/16 GC11	✓	✓	✓		✓	<ul style="list-style-type: none"> • Long-term stability • Chip technology • Size • Response • Accuracy 	Medical catheters military/aerospace, airflow, blood analysis
Leadless chip thermistors 	NDU HM	✓	✓				<ul style="list-style-type: none"> • Silver or gold electrodes suitable for wire bonding • Small size 	Hybrid circuits, glucose monitors, digital thermometers



NTC Thermistors

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
<p>Cryogenic thermistors</p> 	RL1004 RL060628 CTP60 CTP65 CTP85 CTP100	✓	✓			✓	<ul style="list-style-type: none"> Suitable for use at very low temperatures—down to -196°C 	Cryogenic temperature measurement
<p>Unleaded discs</p> 	KU UD20 0706 1403 1703 1803 2006 3006	✓	✓				<ul style="list-style-type: none"> Wide range of resistance vs temperature curves Custom design 	Automotive engine temperature sensing

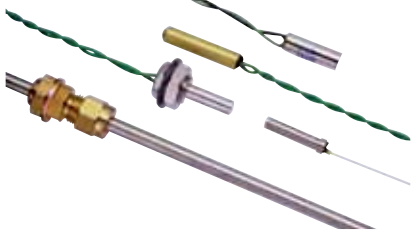
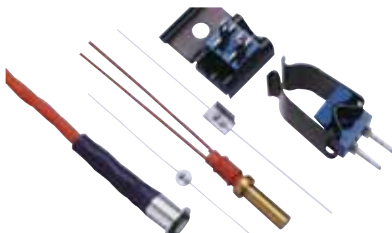


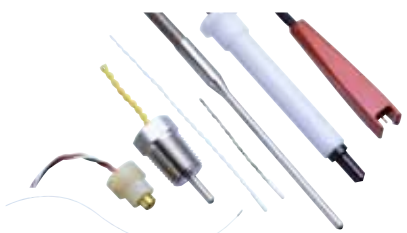
PTC Thermistors

Description	Codes	Over Temperature	Over Current	Surge Generation	Current Stabilization	Fluid Level/Flow Detection	Self Regulating Heaters	Key Features	Typical Uses
<p>Motor protection</p> 	YA YB YC YD YF YG PTD	✓						<ul style="list-style-type: none"> • Small insulated head • Long insulated flexible wire • Switch temperatures 30 to 180°C • DIN compliance • MOD approval 	Protection of industrial motors and transformers, submarine motors
<p>Surface sensors</p> 	YK YR PTA PTE	✓						<ul style="list-style-type: none"> • Screw-in or bolt-on configurations • Flexible or solid wire • Switch temperature 30 to 140°C 	Semi-conductor heat sinks, enclosure panels, power supplies
<p>Wired devices - general purpose</p> 	YM120 YP YS4019 YS4020 PTF PTO		✓	✓	✓			<ul style="list-style-type: none"> • Ratings up to 1000 Vrms • Switch currents up to 2A 	Transformer protection, electronic lighting, instrument/DMM protection
<p>Surface mount devices</p> 	YSM YSM 4021 PTSM		✓	✓	✓			<ul style="list-style-type: none"> • High power SMD PTCs • Compatible with SMD assembly • Ratings up to 1000 Vrms • Switch currents up to 2A • Conformance to ITU-T K20/21 	Telecom line protection, DMM instrument protection, electronic lighting control
<p>Circuit protection</p> 	YS	✓	✓		✓			<ul style="list-style-type: none"> • Custom designed for electronic circuit applications • Excellent thermal shock and power handling performance • Conformance to ITU-T K20/21 	Telecom primary and secondary protection

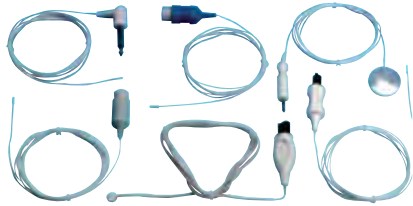



PTC Thermistors

Description	Codes	Over Temperature	Over Current	Surge Generation	Current Stabilization	Fluid Level/Flow Detection	Self Regulating Heaters	Key Features	Typical Uses
<p data-bbox="172 415 368 443">Self-regulating heaters</p> 	<p data-bbox="614 415 655 464">YH PTH</p>						<ul data-bbox="1019 415 1252 653" style="list-style-type: none"> • Temperature regulation on range of supply voltage • Voltage ratings 12 to 240 V • Reference temperatures 40 to 180°C • Custom shapes 	<p data-bbox="1262 415 1457 709">Medical equipment, in-line diesel fuel heaters, LCD heaters, stabilization of electronic components, wax motors, saw devices, air fresheners outside camera lenses</p>	
<p data-bbox="172 720 336 747">Liquid level sensing</p> 	<p data-bbox="614 720 655 768">YL JYA</p>					<ul data-bbox="1019 720 1252 810" style="list-style-type: none"> • Water resistant housing • High sensitivity • Axial and radial formats 	<p data-bbox="1262 720 1457 873">Tea urns, fuel storage systems, industrial plants, laboratory water stills, vending machines</p>		



Probes and Assemblies

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
 <p>General purpose sensors</p>	GT JA JB JE JF JP M series T series	✓	✓			✓	<ul style="list-style-type: none"> • Tmax 225°C • Range of fittings 	Domestic ovens, combination microwave ovens, industrial process control
 <p>Fast response surface sensors</p>	JC JW JD JS2945 Substrate	✓					<ul style="list-style-type: none"> • Response time down to 250 ms • Voltage insulation 1500 V • Environmental protection • Pipe ranges 13 mm to 22 mm 	Gas boiler control, domestic water systems, air conditioners, showers, vending machines, radiator inlet-outlet, automotive temperature sensing, aerospace de-icing
 <p>Refrigeration, low temperature</p>	JL JM JI EVAP A1424 EVAP for HVAC A1447-A1450	✓					<ul style="list-style-type: none"> • Low temperature • Resistant to moisture ingress 	Low temperature appliances, air conditioning evaporators, industrial and domestic refrigeration, automotive
 <p>Eyelet</p>	JR M2000	✓					<ul style="list-style-type: none"> • Ease of installation • M3, M4, M5 eyelet sizes 	Semiconductor heatsinks, enclosure panels, surface temperature measurement, PC fan control, power supplies, air conditioning ducts
 <p>Medical products</p>	Custom assemblies	✓				✓	<ul style="list-style-type: none"> • Clinically approved materials 	Thermometer probes, catheters, skin sensors, fluid flow

Probes and Assemblies

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
<p>Medical products</p> 	<p>AB6 MA100 MA400</p>	<p>✓</p>					<ul style="list-style-type: none"> • Clinically approved materials • Custom designs • Size • Accuracy 	<p>Medical catheters (thermodilution, esophageal, foley, ablation), vital sign monitors</p>
<p>Automotive subassemblies</p> 	<p>Lead frame</p>	<p>✓</p>	<p>✓</p>				<ul style="list-style-type: none"> • Designed for automated assembly • Reduced overall sensor cost • Enhanced reliability 	<p>Automotive engine temperature</p>
<p>Automotive assemblies</p> 	<p>Brass assemblies, etc.</p>	<p>✓</p>	<p>✓</p>				<ul style="list-style-type: none"> • Custom designed • In-house overmolding capability • Large variety of connector options 	<p>Automotive coolant temperature indication</p>
<p>Composite NTC/PTC</p> 	<p>KY</p>	<p>✓</p>					<ul style="list-style-type: none"> • Constant resistance over normal operating temperature range (accomplished by using NTC/PTC paired thermistors) 	<p>Automotive coolant dashboard sensor</p>

Additional Technologies and Accessories

Description	Codes	Temperature Measurement Control	Temperature Compensation	Surge Suppression	Power Measurement	Fluid Level/Flow Detection	Key Features	Typical Uses
<p>IR thermopile sensors</p> 	ZTP	✓	✓				<ul style="list-style-type: none"> • Non-contact temperature sensing • Fast response • Temperature compensated • Sensing elements/modules • Single and dual zone available 	<p>Microwave ovens, automotive air conditioning, ear thermometers</p> <p>Cooktop surface control</p>
<p>High temperature sensors</p> 	JTC JTR PT100 PT200 PT1000	✓	✓			✓	<ul style="list-style-type: none"> • Operation up to 1150°C • Flexible sensor • Industry standard connection • Customized OEM solutions • RTD, thermocouples and NTC technologies 	<p>Industrial and process control, food and beverage processing, automotive</p>

About us

Amphenol has united the technological innovation and experience of industry leaders in the design and manufacture of advanced sensing solutions into one world-class business.

Amphenol Advanced Sensors sensing products measure temperature, pressure, liquid level, moisture and humidity, gas concentration, and flow rate for applications ranging from environmental, medical, and pharmaceutical to automotive, and aerospace.

Amphenol Advanced Sensors offers industry leading domain expertise, rapid customization, world-class manufacturing capability and lasting customer relationships to deliver the greatest value in cost of ownership to their customers.


*Temperature,
humidity,
pressure, CO₂,
light*



Pressure



Temperature



Gas



Humidity



Amphenol

Advanced Sensors

www.amphenol-sensors.com

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [PTC \(Positive Temperature Coefficient\) Thermistors](#) *category:*

Click to view products by [Amphenol](#) *manufacturer:*

Other Similar products are found below :

[PTCCL09H251FBE](#) [PTCTL3MR100GTE](#) [PTCCL05H630HTE](#) [B59346A1502P020](#) [B59980C0160A070](#) [PTCTT95R100GTE](#)
[PTCLL05P131TBE](#) [B59841C0135A070](#) [PTCCL09H541DBE](#) [TFPT0805L1800FV](#) [B59725T1120A062](#) [B59116S0225B010](#)
[B59008C0150A040](#) [B59100M1090A070](#) [B59100M1145A070](#) [B59873C0120A070](#) [102PS1G](#) [B59300M1150A070](#) [B59339A1501P020](#)
[B59770B0120A070](#) [B59995C0120A070](#) [YQR100R060](#) [YQS5751PTO](#) [YQS5856PTF](#) [YQS5930PTO](#) [YS5675](#) [YS5918PTO](#) [YQS5898PTO](#)
[YQS5868PTF](#) [YQD100N1000](#) [KTY81/210,112](#) [B59010D1135B40](#) [B59606A110A62](#) [B59807A90A62](#) [B59830C120A70](#) [B59874C120A70](#)
[B59960C160A70](#) [YQD120N0025](#) [PTGL12AS4R7K6B51B0](#) [PTGL12AR270M9C01B0](#) [PTGL12AR100M6C01B0](#) [PTGL09AR390N0B52A0](#)
[PTGL07AS2R7K2B51A0](#) [PTGL07AS1R8K2B51B0](#) [PTS120601B100RPU00](#) [PTGL10AR3R9M3P51B0](#) [PTGL07BD220N3B51B0](#)
[PTGL07AS5R6K4B51B0](#) [PTGL07AS150K6B51A0](#) [PTGL07AR8R2M3P51B0](#)