
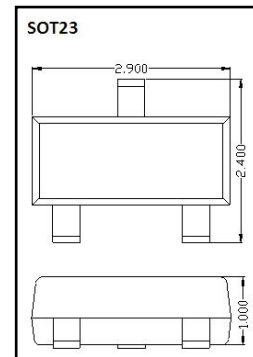


Zener Diodes / DATA SHEET

AZ23C2V7 THRU AZ23C51

- ◇ Planar Die construction
- ◇ 350mW Power Dissipation
- ◇ Zener Voltages from 2.7V–51V
- ◇ RoHS compliant / Green EMC
- ◇ Vz for both diodes in one case is ≤5%.

*Pin Configuration - Top View



MAXIMUM RATINGS (Ta = 25 °C)

Symbol	Parameter	Value	Units
VF	Maximum Forward Voltage @ IF=10mA	0.9	V
P(AV)	Power Dissipation	300	mW
T _J Tstg	Operating And Storage Temperature	-55 to 150	°C
Tstg	Storage Temperature Rance	-55 to 150	°C
Rj	Thermal Resistance Junction to Ambient	417	°C/W

AZ23C2V7 THRU AZ23C51

ELECTRICAL CHARACTERISTICS (Ta = 25 °C unless otherwise noted)

Type Number	Marking Code	Zener voltage Range (note1)	Maximum zener Impedance (note 2)		Typical Temperature coefficient	Min reverse Voltage (note1)
		@ IZT=5.0mA	ZZT@IZT=5.0mA A	ZZk@IZk=1.0mA		@IR=0.1uA
		VZ (volts)	Ohms	Ohms	Tc (%/°C)	VR (volts)
AZ23C2V7	KD1	2.5–2.9	83	500	-0.065	-


AZ23C3V0	KD2	2.8-3.2	95	500	-0.060	-
AZ23C3V3	KD3	3.1-3.5	95	500	-0.055	-
AZ23C3V6	KD4	3.4-3.8	95	500	-0.055	-
AZ23C3V9	KD5	3.7-4.1	95	500	-0.050	-
AZ23C4V3	KD6	4.0-4.6	95	500	-0.035	-
AZ23C4V7	KD7	4.4-5.0	78	500	-0.015	-
AZ23C5V1	KD8	4.8-5.4	60	480	+0.005	0.8
AZ23C5V6	KD9	5.2-6.0	40	400	+0.020	1.0
AZ23C6V2	KDA	5.8-6.6	10	200	+0.030	2.0
AZ23C6V8	KDB	6.4-7.2	8.0	150	+0.045	3.0
AZ23C7V5	KDC	7.0-7.9	7.0	50	+0.050	5.0
AZ23C8V2	KDD	7.7-8.7	7.0	50	+0.055	6.0
AZ23C9V1	KDE	8.5-9.6	10	50	+0.065	7.0
AZ23C10	KDF	9.4-10.6	15	70	+0.065	7.5
AZ23C11	KDG	10.4-11.6	20	70	+0.070	8.5
AZ23C12	KDH	11.4-12.7	20	90	+0.075	9.0
AZ23C13	KDI	12.4-14.1	25	110	+0.080	10.0
AZ23C15	KDJ	13.8-15.6	30	110	+0.080	11.0
AZ23C16	KDK	15.3-17.1	40	170	+0.090	12.0
AZ23C18	KDL	16.8-19.1	50	170	+0.090	14.0
AZ23C20	KDM	18.8-21.2	50	220	+0.090	15.0
AZ23C22	KDN	20.8-23.3	55	220	+0.090	17.0
AZ23C24	KDO	22.8-25.6	80	220	+0.090	18.0
AZ23C27	KDP	25.1-28.9	80	250	+0.090	20.0
AZ23C30	KDQ	28-32	80	250	+0.090	22.5
AZ23C33	KDR	31-35	80	250	+0.090	25.0
AZ23C36	KDS	34-38	90	250	+0.090	27.0
AZ23C39	KDT	37-41	90	300	+0.110	29.0
AZ23C43	D30	40-46	100	700	+0.110	32.0
AZ23C47	D31	44-50	100	750	+0.110	35.0
AZ23C51	D32	48-54	100	750	+0.110	38.0

ORDERING INFORMATION

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
AZ23C2V7- AZ23C51	SOT23	Tape & Reel 3000pcs /7" Reel	8mm	4mm	Conductive	

PACKAGE DIMENSIONS

Package Outline : SOT23

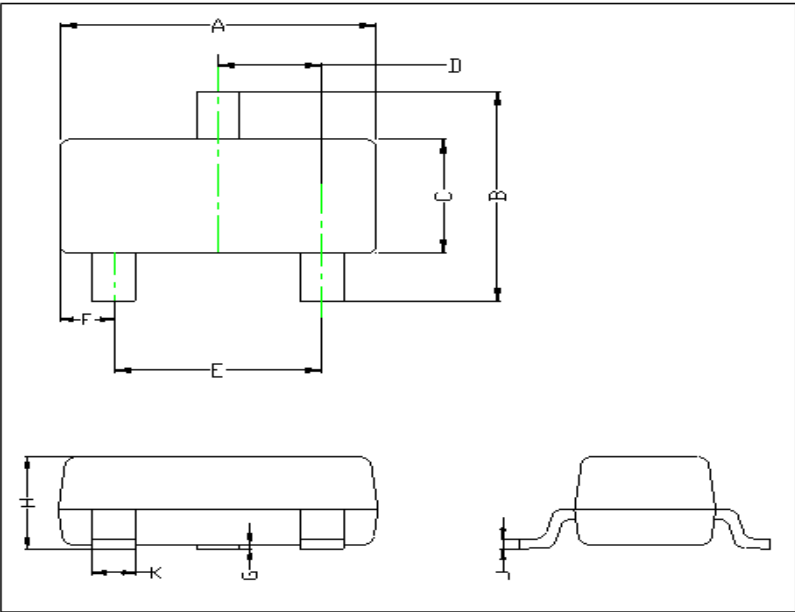

Symbol	Dimensions in mm	
	Min.	Max.
A	2.800	3.040
B	2.100	2.640
C	1.200	1.400
D	0.890	1.030
E	1.780	2.050
F	0.450	0.600
G	0.013	0.100
H	0.900	1.110
J	0.090	0.180
K	0.370	0.510

SOT23 Package Outline

Note:
 1. Halogen free ,EMC
 2. Pb free solder
 3. Lead thickness solder plating
 4. Lead frame CAC-5
 5. Other Tolerance ± 0.05
 6. Dimensions are exclusive of Burrs Mold Flash and Tie Bar extrusions
 7. Unit :mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [amsem](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#) [1N747A](#)
[1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [1N4692](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4745ARL](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#)
[MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DZ2S240M0L](#) [SMAZ27-](#)
[TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD39S-T1-A](#) [RD10S-T1-A](#) [CDZT2R5.6B](#) [1N4762A G](#) [Z1SMA18](#) [JANTX1N4553B](#)