


DATA SHEET

BAW56

- ◇ Fast Switching Speed
- ◇ For General Purpose Switching Applications
- ◇ High Conductance
- ◇ Low Current Leakage
- ◇ Small Outline Surface Mount Package
- ◇ RoHS compliant / Green EMC

Device Marking Code	
BAW56	A1

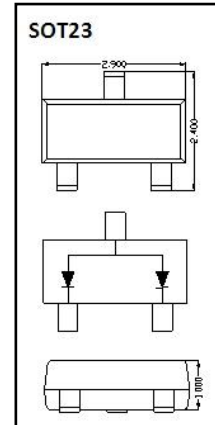

MAXIMUM RATINGS (T_a = 25 °C)

Symbol	Parameter	Value	Units
V _R	Reverse Voltage	75	V
I _F	Forward Continuous Voltage	250	mA
P _{tot}	Power Dissipation	350	mW
I _{FSM}	Peak Forward Surge Current @t=1.0S	1.	A
T _{stg}	Storage Temperature	-55 to 150	°C
T _J	Junction Temperature	150	°C
R	Thermal Resistance	357	°C/W

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)


Symbol	Parameter	Test Conditions	Min	Max	Units
V _F	Forward Voltage	I _F =10mA		0.855	V
V _R	Reverse breakdown voltage	I _R =100uA	75		V
I _R	Reverse voltage leakage current	V _R =75V		2.5	uA
		V _R =75V T _J =150°C		50	uA
C _J	Typical Junction Capacitance	V _R =0V, f=1.0MHz		2	pF
T _{rr}	Reverse recovery time	I _F =10mA, V _R =0V, R _L =500Ω		4	nS

ORDERING INFORMATION

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
BAW56	SOT23	Tape & Reel 3000pcs /7" Reel	8mm	4mm	Conductive	

PACKAGE DIMENSIONS

Package Outline : SOT23

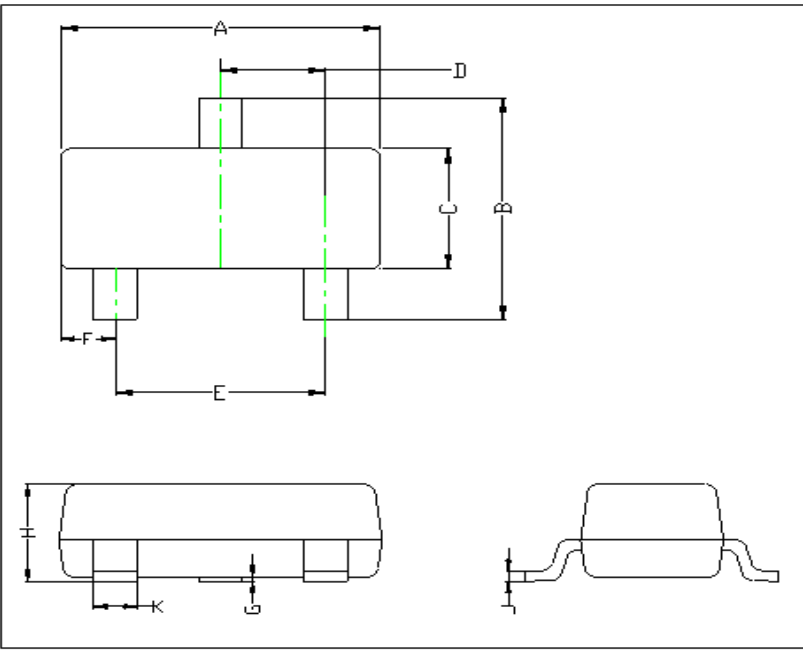

Symbol	Dimensions in mm	
	Min.	Max.
A	2.800	3.040
B	2.100	2.640
C	1.200	1.400
D	0.890	1.030
E	1.780	2.050
F	0.450	0.600
G	0.013	0.100
H	0.900	1.110
J	0.090	0.180
K	0.370	0.510

SOT23 Package Outline

Note:
 1. Halogen free ,EMC
 2. Pb free solder
 3. Lead thickness solder plating
 4. Lead frame CAC-5
 5. Other Tolerance ± 0.05
 6. Dimensions are exclusive of Burrs Mold Flash and Tie Bar extrusions
 7. Unit : mm

NOTICE

AM'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS.

AM reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. AM does not assume any liability arising out of the application or use of any product described herein.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Diodes - General Purpose, Power, Switching category](#):

Click to view products by [amsem manufacturer](#):

Other Similar products are found below :

[MMBD3004S-13-F](#) [1N3611](#) [NTE156A](#) [NTE6244](#) [1SS400CST2RA](#) [SDAA13](#) [SHN2D02FUTW1T1G](#) [1N4449](#) [1N456A](#) [1N914BTR](#)
[D291S45T](#) [BAS 16-02L E6327](#) [BAS 16-02V H6327](#) [BAS 21U E6327](#) [BAS 28 E6327](#) [BAW56DWQ-7-F](#) [BAW56M3T5G](#) [BAW75-TAP](#)
[MM230L-CAA](#) [IDW40E65D1](#) [JAN1N3600](#) [JAN1N4454UR-1](#) [SMMSD4148T3G](#) [BYW95B/A52A](#) [NSVDAN222T1G](#) [CDSZC01100-HF](#)
[BAV70HDW-7](#) [BAS28-7](#) [JANTX1N6640](#) [BAW56HDW-13](#) [BAS28 TR](#) [VS-HFA04SD60STR-M3](#) [1SS388-TP](#) [BAV99TQ-13-F](#)
[BAV99HDW-13](#) [1N4004](#) [MMDB30-E28X](#) [LS4148](#) [IDV15E65D2](#) [W0503RH200S0L](#) [M0268SJ200NLF](#) [M0268RJ200NLF](#) [S3MBF](#) [US1J](#)
[DAN217U-TP](#) [SHV-06JNS-Q](#) [IDW30C65D1](#) [IDW80C65D1](#) [VS-HFA30TA60CSR-M3](#) [M1MA152WAT1](#)