
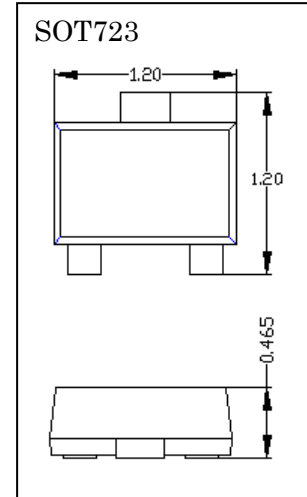


DATA SHEET

BC846AM3 THRU BC848CM3

- ◇ Small Outline Surface Mount Package
- ◇ RoHS compliant / Green EMC



Device	BC846A	BC846B	BC847A	BC847B	BC847C	BC848A	BC848B	BC848C
Marking	1A	1B	1E	1F	1G	1J	1K	1L

MAXIMUM RATINGS (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	BC846	80
		BC847	50
		BC848	30
V _{CEO}	Collector-Emitter Voltage	BC846	65
		BC847	45
		BC848	30
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current	100	mA
P _C	Collector Power Dissipation	265	mW
R _{θJA}	Thermal Resistance From Junction To Ambient ^(Note1)	472	°C/W
T _j	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55~+150	°C







Note:

1. Device Mounted on FR-5: 1.0 X 0.75 X 0.062 inch.

ELECTRICAL CHARACTERISTICS @ 25° C Unless Otherwise Specified

Symbol	Parameter	Test Conditions	Min	Max	Units		
V _{CEO}	Collector-Emitter Breakdown Voltage	I _C =10mA, I _B =0					
		BC846	65		V		
		BC847	45				
V _{CBO}	Collector-Base Breakdown Voltage	I _C =10μA, I _E =0					
		BC846	80		V		
		BC847	50				
V _{EBO}	Emitter-Base Breakdown Voltage	I _E =10μA, I _C =0					
		BC846	6		V		
		BC847	6				
BC848			5				
		I _{CB0}	Collector Cutoff Current	V _{CB} =30V, I _E =0		15	nA
		I _{CE0}	Emitter Cutoff Current	V _{CE} =30V, I _B =0V		1	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} =5V, I _C =0		100	nA		
h _{FE}	DC Current Gain	V _{CE} =5V, I _C =2mA					
		BC846A/BC847A/BC848A	110	220			
		BC846B/BC847B/BC848B	200	450			
BC847C/BC848C			420	800			
		V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =10mA, I _B =0.5mA		0.3	V
		I _C =100mA, I _B =5mA		0.6			
V _{BE(sat)}	Base-Emitter Saturation Voltage	I _C =10mA, I _B =0.5mA		0.9	V		
		I _C =100mA, I _B =5mA		1.1			
V _{BE(on)}	Base-Emitter On Voltage	V _{CE} =5V, I _C =2mA	0.58	0.7	V		
		V _{CE} =5V, I _C =10mA		0.77			
f _T	Current Gain-Bandwidth Product	V _{CE} =5V, I _C =10mA, f=100MHz	100		MHz		


TYPICAL CHARACTERISTICS

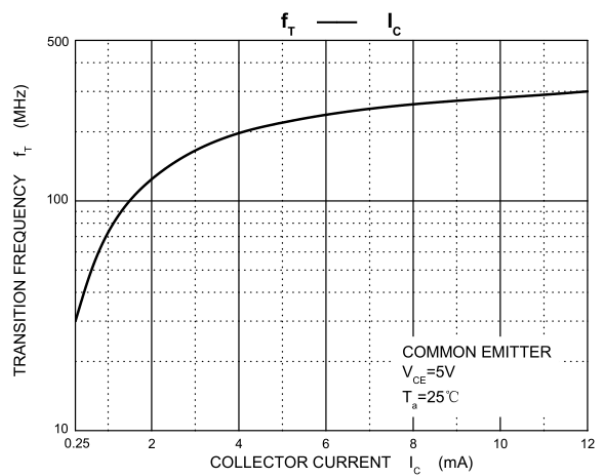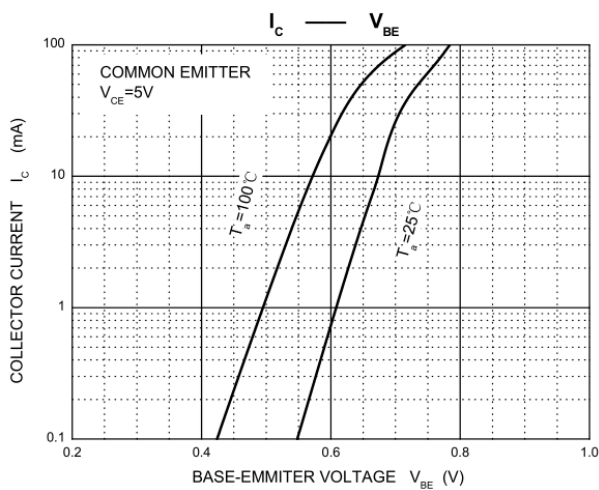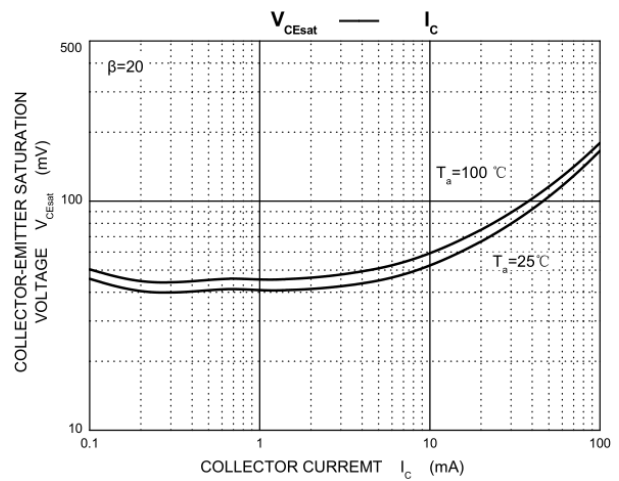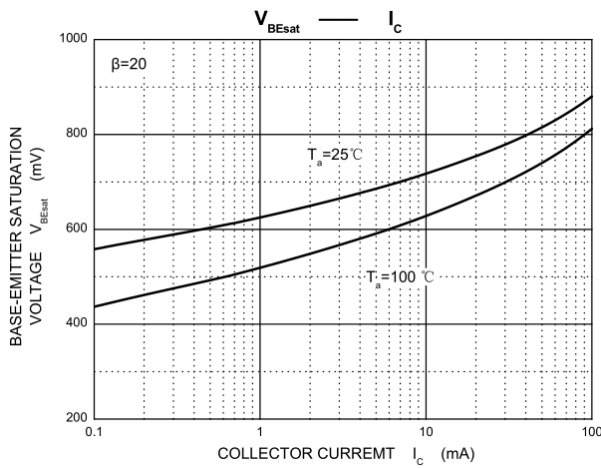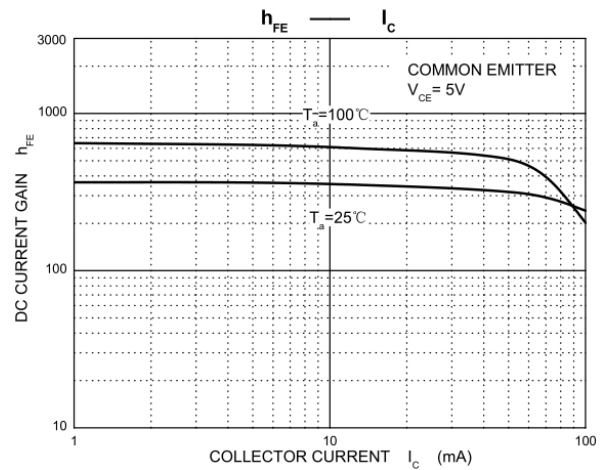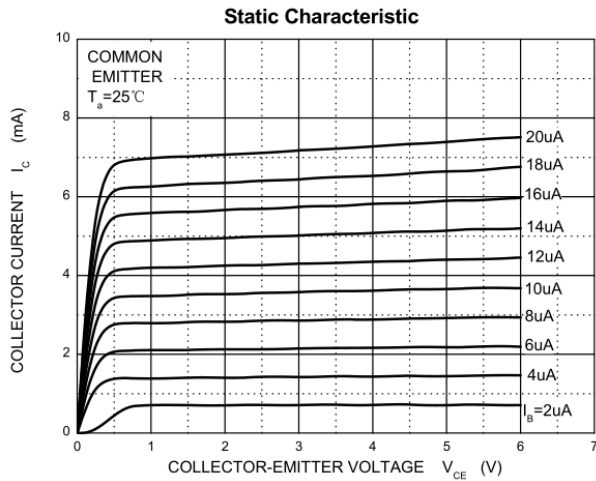

ORDERING INFORMATION

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
BC846AM3 THRU BC848CM3	SOT723	Tape & Reel 8000pcs /7" Reel	8mm	4mm	Conductive	

PACKAGE DIMENSIONS

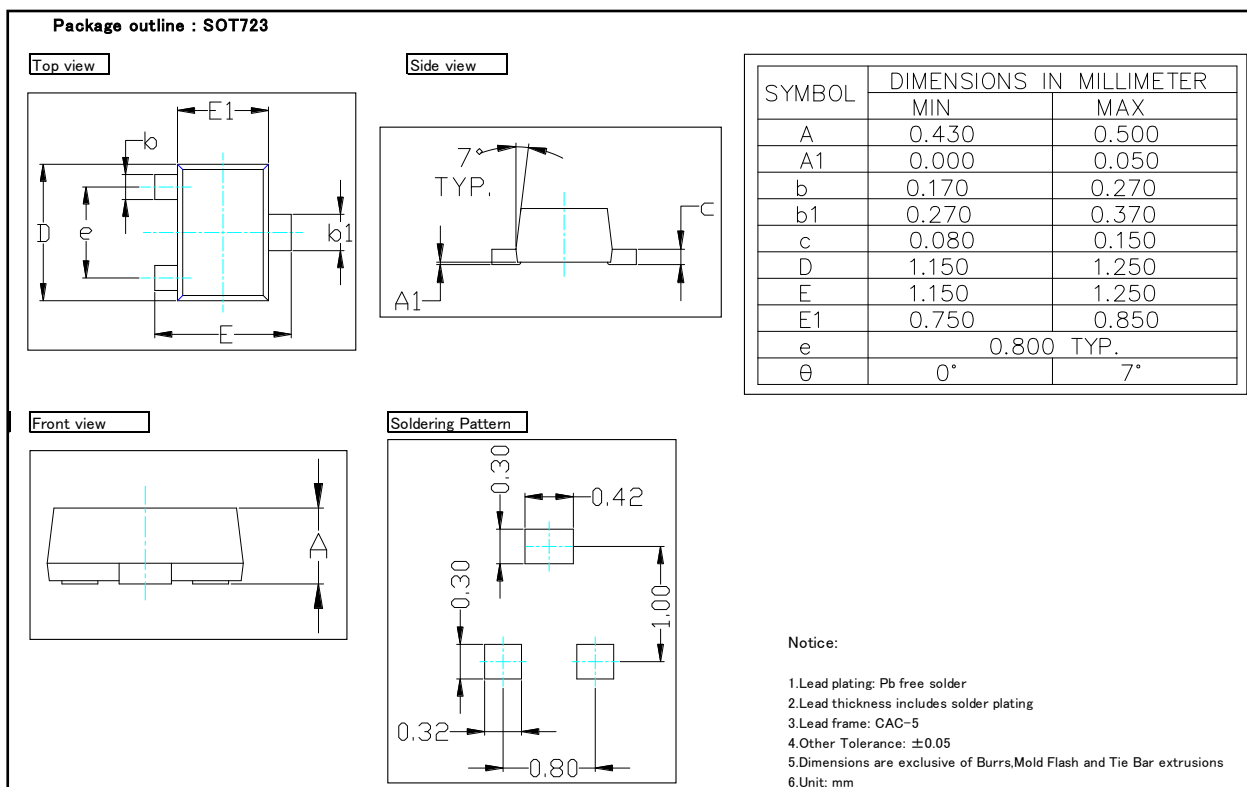

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [amsem manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)