


Zener Diodes / DATA SHEET

BZX584C Series

- ◇ Constant Voltage control
 - ◇ Wide Voltage Range Selection 2.4V to 75V
 - ◇ **SOD523 Thin** SMD package
 - ◇ RoHS compliant / Green EMC
 - ◇ Matte Tin (Sn) Lead finish
 - ◇ Cathode Band / Device marking
- Refer to table list

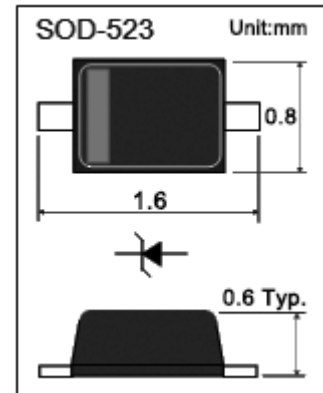

Maximum Ratings (Ta = 25 °C)

Symbol	Parameter	Value	Units
P_D	Power Dissipation	200	mW
T_J	Junction Temperature	150	°C
T_{STG}	Storage Temperature	-55 to +150	°C
I_{ZM}	Maximum Regulator Current	P_D/V_Z	mA

Electrical Characteristics (Ta = 25 °C)

Type Number	Device Marking	V_Z (V) *1			I_{ZT} mA	$Z_{ZT}@I_{ZT}$ Ω	$Z_{ZK}@I_{ZK}$ Ω	I_{ZK} (mA)	I_R (μ A)	V_R (V)
		Nom(V)	Min(V)	Max(V)						
BZX584C2V4	Z11	2.4	2.20	2.60	5	100	600	1.0	50	1.0
BZX584C2V7	Z12	2.7	2.5	2.9	5	100	600	1.0	20	1.0
BZX584C3V0	Z13	3.0	2.8	3.2	5	95	600	1.0	10	1.0
BZX584C3V3	Z14	3.3	3.1	3.5	5	95	600	1.0	5	1.0
BZX584C3V6	Z15	3.6	3.4	3.8	5	90	600	1.0	5	1.0
BZX584C3V9	Z16	3.9	3.7	4.1	5	90	600	1.0	3	1.0
BZX584C4V3	Z17	4.3	4.0	4.6	5	90	600	1.0	3	1.0
BZX584C4V7	Z1	4.7	4.4	5.0	5	80	500	1.0	3	2.0
BZX584C5V1	Z2	5.1	4.8	5.4	5	60	480	1.0	2	2.0
BZX584C5V6	Z3	5.6	5.2	6.0	5	40	400	1.0	1	2.0
BZX584C6V2	Z4	6.2	5.8	6.6	5	10	150	1.0	3	4.0


Continued next page

Electrical Characteristics (Ta = 25 °C)


Type Number	Device Marking	Vz (V) *1			I _{ZT}	Z _{zT} @I _{ZT}	Z _{zK} @I _{ZK}	I _{zk}	I _R	V _R
		Nom(V)	Min(V)	Max(V)	mA	Ω		(mA)	(uA)	(V)
BZX584C6V8	Z5	6.8	6.4	7.2	5	15	80	1.0	2	4.0
BZX584C7V5	Z6	7.5	7.0	7.9	5	15	80	1.0	1	5.0
BZX584C8V2	Z7	8.2	7.7	8.7	5	15	80	1.0	0.7	5.0
BZX584C9V1	Z8	9.1	8.5	9.6	5	15	100	1.0	0.5	6.0
BZX584C10	Z9	10.0	9.4	10.6	5	20	150	1.0	0.2	7.0
BZX584C11	Y1	11.0	10.4	11.6	5	20	150	1.0	0.1	8.0
BZX584C12	Y2	12.0	11.40	12.7	5	25	150	1.0	0.1	8.0
BZX584C13	Y3	13.0	12.40	14.10	5	30	170	1.0	0.1	8.0
BZX584C15	Y4	15.0	13.8	15.6	5	30	200	1.0	0.1	10.5
BZX584C16	Y5	16.0	15.3	17.1	5	40	200	1.0	0.1	11.2
BZX584C18	Y6	18.0	16.8	19.1	5	45	225	1.0	0.1	12.6
BZX584C20	Y7	20.0	18.8	21.2	5	55	225	1.0	0.1	14.0
BZX584C22	Y8	22.0	20.8	23.3	5	55	250	1.0	0.1	15.4
BZX584C24	Y9	24.0	22.80	25.6	5	70	250	1.0	0.1	16.8
BZX584C27	Y10	27.0	25.1	28.9	2	80	300	0.5	0.1	18.9
BZX584C30	Y11	30.0	28.0	32.0	2	80	300	0.5	0.1	21.0
BZX584C33	Y12	33.0	31.0	35.0	2	80	325	0.5	0.1	23.1
BZX584C36	Y13	36.0	34.0	38.0	2	90	350	0.5	0.1	25.2
BZX584C39	Y14	39.0	37.0	41.0	2	130	350	0.5	0.1	27.3
BZX584C43	Y15	43.0	40.0	46.0	2	100	700	1	0.1	32
BZX584C47	V1	47.0	44.65	49.35	2	170	1000	0.25	0.1	36
BZX584C51	V2	51	48.45	53.55	2	180	1300	0.25	0.1	39
BZX584C56	V3	56	53.20	58.80	2	200	1400	0.25	0.1	43
BZX584C62	V4	62	58.90	65.10	2	225	1400	0.25	0.1	47
BZX584C68	V5	68	64.60	71.40	2	240	1600	0.25	0.1	52
BZX584C75	V6	75	71.25	78.75	2	265	1700	0.25	0.1	56

*1 Pulse width = 10 ms


Typical Characteristics

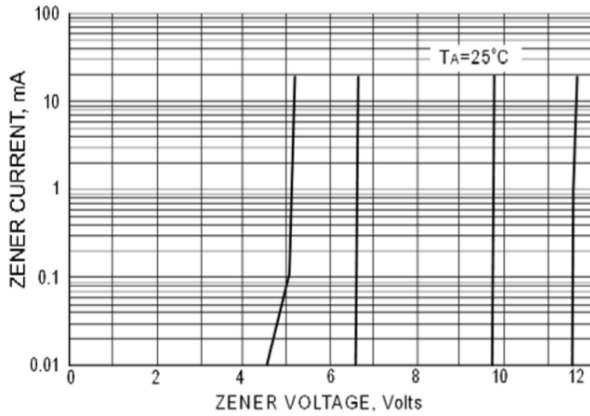


ZENER BREAKDOWN CHARACTERISTIC

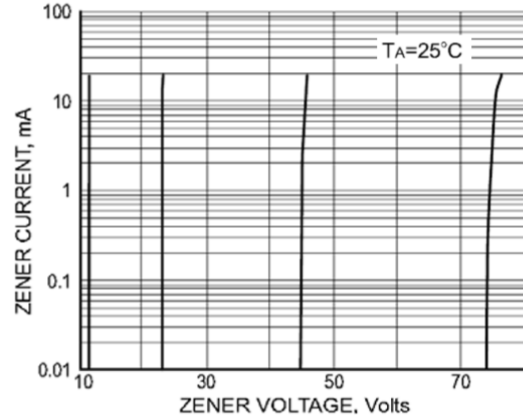


ZENER BREAKDOWN CHARACTERISTICS

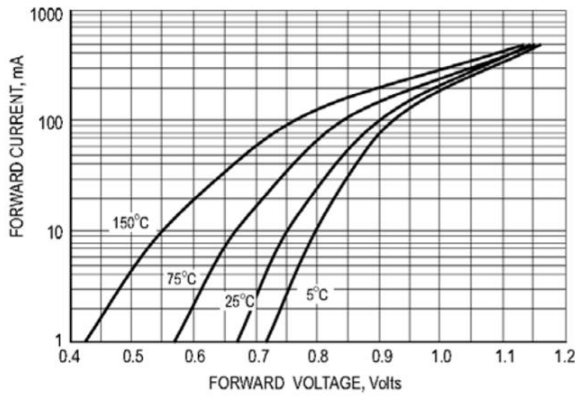


TYPICAL FORWARD VOLTAGE

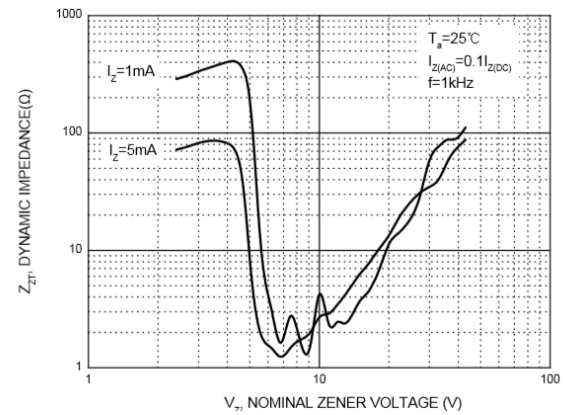


Effect of Zener Voltage on Zener Impedance

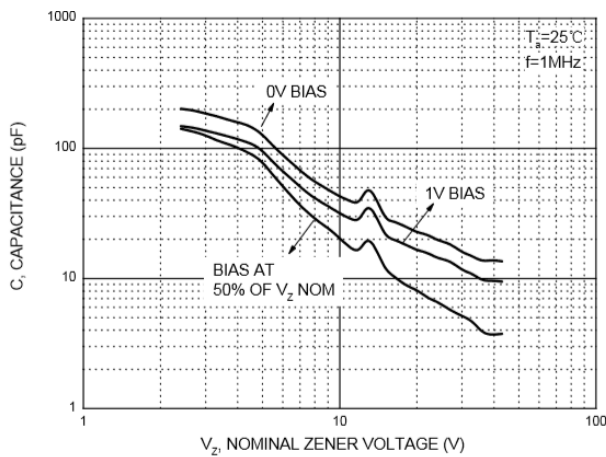

Typical Capacitance

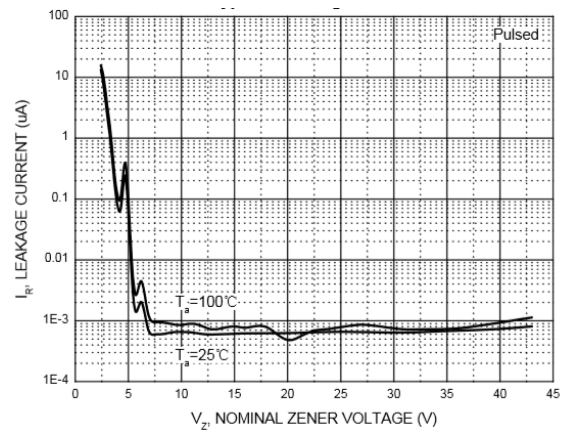

Typical Leakage Current

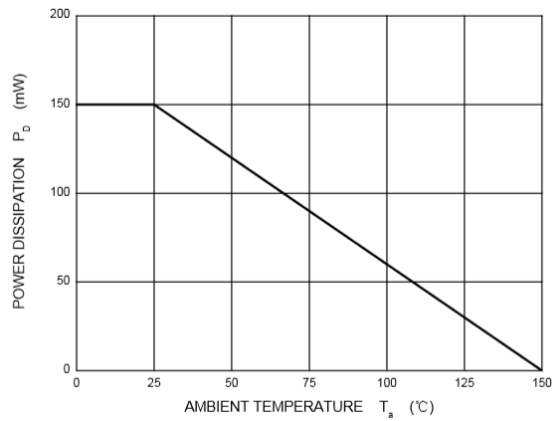


Power Derating Curve

Ordering Information

Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
BZX584C Series	SOD523	Tape & Reel 8000pcs /7" Reel	8 mm	4 mm	Conductive	

Package Dimensions

Package outline : SOD-523

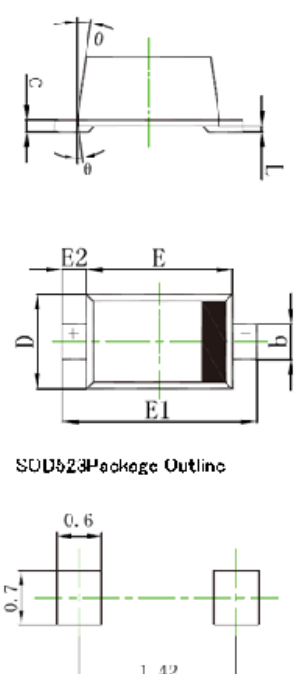

Unit	A	A1	b	c	D	E	E1	E2	L	θ
Max.	0.77	0.70	0.35	0.15	0.85	1.30	1.70	0.20	0.07	7°
Min.	0.51	0.50	0.25	0.08	0.75	1.10	1.50	REF.	0.01	REF.

SOD523 Package Outline

Lead Pattern Recommendation

Note:
 1. Halogen free, EMC
 2. Pb free solder
 3. Lead thickness includes solder plating
 4. Lead frame: Cu
 5. Other Tolerance: ± 0.05
 6. Dimensions are exclusive of Burrs, Mold Flash and Tie Bar extrusions
 7. Unit: mm

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Zener Diodes](#) category:

Click to view products by [amsem](#) manufacturer:

Other Similar products are found below :

[RKZ13B2KG#P1](#) [DL5234B](#) [1N4682](#) [1N4693](#) [1N4732A](#) [1N4736A](#) [1N4750A](#) [1N4759ARL](#) [1N5241B](#) [1N5365B](#) [1N5369B](#) [1N747A](#)
[1N964B](#) [1N966B](#) [1N968B](#) [1N972B](#) [JANS1N4974US](#) [1N4692](#) [1N4702](#) [1N4704](#) [1N4711](#) [1N4714](#) [1N4745ARL](#) [1N4752ARL](#) [1N4760ARL](#)
[1N5221B](#) [1N5242BTR](#) [1N5350B](#) [1N5352B](#) [1N961BRR1](#) [1N964BRL](#) [RKZ5.1BKU#P6](#) [3SMAJ5946B-TP](#) [3SMAJ5950B-TP](#)
[MMSZ5230BQ-13-F](#) [MMSZ5232BQ-13-F](#) [BZX84C7V5](#) [3SMAJ5945B-TP](#) [3SMAJ5947B-TP](#) [3SMBJ5941B-TP](#) [DZ2S240M0L](#) [SMAZ27-](#)
[TP](#) [ZMM5224B-7](#) [RD16UM-T1-A](#) [RD39S-T1-A](#) [RD10S-T1-A](#) [CDZT2R5.6B](#) [1N4762A G](#) [Z1SMA18](#) [JANTX1N4553B](#)