

MODULE KITS :: Amulet Capacitive 4.3" GEMmodule™



AMULET CAPACITIVE 4.3" GEMmodule™

Amulet's Capacitive 4.3" GEMmodule™ is a fully integrated drop-in solution that allows customers to implement a Graphical User Interface with a Smartphone-like look and feel in record time-to-market. The module has multi-touch and gesture support and can be programmed using GEMstudio™, the easiest and most flexible GUI design software tool in the embedded space. When developing their GUI, customers can go through as many iterations as necessary, making corrections in real time, and testing results immediately. With Cypress TrueTouch™ technology, the Amulet Capacitive 4.3" GEMmodule™ provides unparalleled signal-to-noise ratio and excellent touch performance.


Module Components:

- :: Amulet's GEM Graphical OS Chip™
- :: 4.3" Color TFT LCD
- :: Projected capacitive P-CAP touch sensor from ClickTouch™
- :: Cypress's TrueTouch® Touchscreen Controller

Features

- :: Best in class accuracy, linearity and fast refresh rate
- :: Supports multitouch gestures with superior accuracy – highest signal to noise ratio (SNR)
- :: Quick and flexible GUI design with GEMstudio™ software development tool
- :: Color Depth - up to 24bit + 8bit alpha; graphics supported - GIF, JPEG, PNG
- :: Built in font converter, foreign language character sets (Unicode)
- :: On board memory (32megabit data flash) for storing GUI pages
- :: Customizable cover glass up to 6mm thick to support virtually any application
- :: White LED backlight with PWM control (user interface or programmable via GEMstudio™)
- :: 24 pin interconnect for serial interface(s) - USB, 3.3vUART, RS232



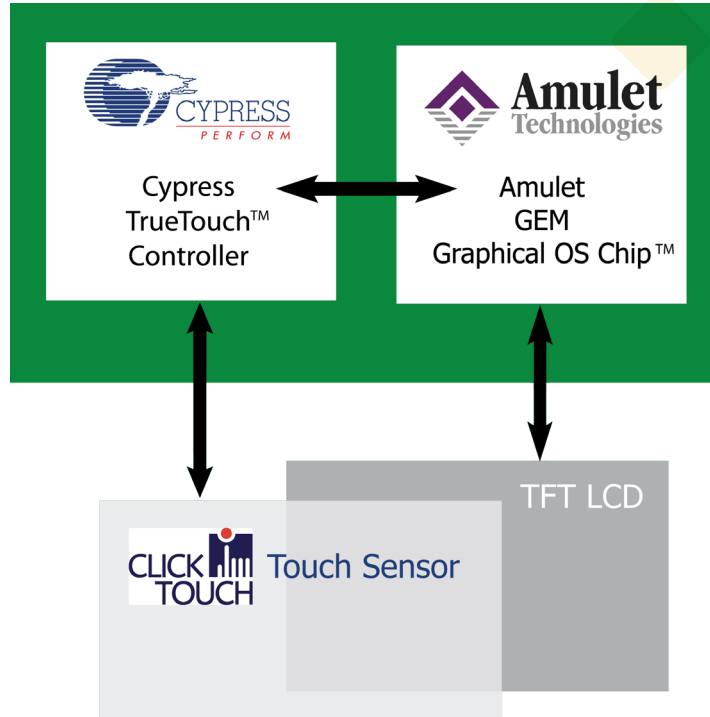

Module Specifications:

Part Number	MK-CY-043
Display Type	4.3" LCD Color Display
Display Resolution	480 x 272 (WQVGA)
Multi-Touch Screen	Yes
Gestures	Yes
Backlight Type	Ultrabright White LED
Backlight Control	PWM
Viewing Angle	6 o'clock
Operating Temperature	-20°C to 70°C
Power Requirement	5Vdc (±.25v) @ 250mA
Communication Type	Amulet Protocol via 3.3V UART, USB, RS232
Data Rate (BAUD)	9,600/19,200/57,600/115,200 bps



Want More Information?

Call or email us today! Also visit us on the Web at www.AmuletTechnologies.com for the latest data sheets, programmer's guide, software updates and more.

Amulet Display Modules are available through Amulet franchised distributors. Visit our Web site for direct "order now" links.

Campbell, California, USA
 Sales@AmuletTechnologies.com
 (408) 374-4956

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Display Modules](#) category:

Click to view products by [Amulet](#) manufacturer:

Other Similar products are found below :

[P6153-PR](#) [TDP0700T800480PCAP](#) [P6171DPR-DC-RS](#) [P6171DPR-DC-U](#) [MIKROMEDIA 4 FOR STM32F4 CAPACITIVE FPI](#)
[MIKROMEDIA 3 FOR STM32F4 CAPACITIVE FPI](#) [TN0216ANVNANN-GN00](#) [TN0104ANVAANN-GN00](#) [TN0181ANVNANN-GN00](#)
[MIKROMEDIA 5 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR PIC32MZ CAPACITIVE](#)
[RVT43ULFNWC03 V4](#) [SM-RVT101HVBWNCA0](#) [SM-RVT35HHBFWCA0](#) [SM-RVT35HHBNWCA0](#) [SM-RVT43HLBNWCA0](#) [SM-](#)
[RVT50HQBFWCA0](#) [SM-RVT50HQBNWCA0](#) [SM-RVT70HSBFWCA0](#) [SM-RVT70HSBNWCA0](#) [11769](#) [MIKROMEDIA FOR DSPIC33](#)
[MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#) [MIKROMEDIA HMI 3.5 RES](#)
[MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#) [MIKROMEDIA PROTO](#)
[SHIELD](#) [MIKROMEDIA 5 FOR TIVA](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA 7 FOR STM32F4](#) [MIKROMEDIA](#)
[CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#) [MIKROMEDIA FOR PSOC5LP](#) [MIKROMEDIA GAMING SHIELD](#) [MIKROMEDIA HMI](#)
[4.3 UXB](#) [MIKROMEDIA HMI 5 RES](#) [MIKROMEDIA HMI 5 UXB](#) [MIKROMEDIA HMI 7](#) [MIKROMEDIA HMI BREAKOUT BOARD](#)
[RVT50UQTNWC05](#) [RVT70AQFNWC00](#) [18207](#) [PIS-0260](#) [GEN4-ULCD-50D-PI](#) [GEN4-ULCD-70D](#) [GEN4-ULCD-70D-PI](#)