

DESCRIPTION

Demonstration circuit 560 is a constant-frequency step-down converter, using the LTC3403 monolithic synchronous buck regulator. It is specifically designed for WCDMA power amplifier applications. The output voltage can be dynamically controlled from 0.3V to 3.5V. A 0.2Ω internal bypass P-channel MOSFET connects the V_{OUT} to V_{IN} reducing the power loss through the buck regulator. DC560 is capable of delivering up to 600mA of output current for an input voltage range of 2.7V to 5V. The efficiency of the DC560 is very high: up to 96%. In Burst Mode™ operation, the DC supply current is typi-

cally only 20 μ A at no load, and less than 1 μ A in shut-down.

The LTC3403 comes in a small 8-Pin DFN package and has an operating frequency of 1.5MHz (allowing the exclusive use of low profile surface mount components).

These and other features make demonstration circuit 560 ideal for single-cell Li-ion-powered hand-held applications.

Design files for this circuit board are available. Call the LTC factory.

QUICK START PROCEDURE

Demonstration circuit 560 is easy to set up to evaluate the performance of the LTC3403EDD. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

NOTE: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the V_{in} or V_{out} and GND terminals. See Figure 2 for proper scope probe technique.

1. Place jumper JP2 in the FC position, JP1 in the ON position.
2. With power off, connect the input power supply V_{IN} to V_{IN} and GND.
3. Connect input power supply V_{REF} to REF and GND.
4. Turn on the power at V_{IN} .

NOTE: Make sure that the input voltage at V_{IN} does not exceed 5V.

5. Turn on the V_{REF} power supply.

NOTE: Make sure that the input voltage V_{REF} does not exceed V_{IN} .

6. For $V_{REF} < 1.2V$, check for the output voltages $V_{OUT} = 3 \cdot V_{REF}$
7. For $V_{REF} > 1.2V$, V_{OUT} is directly connected to V_{IN} . $V_{OUT} = V_{IN}$.

If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

8. Once the proper output voltages are established, adjust the loads within 600mA range and observe the output voltage regulation, ripple voltage, efficiency and other parameters.
9. To test Burst Mode™ operation, set JP2 in the Burst position and JP1 in the ON position, and repeat steps 2 to 7.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 560

WCDMA CELLULAR PHONE BUCK REGULATOR

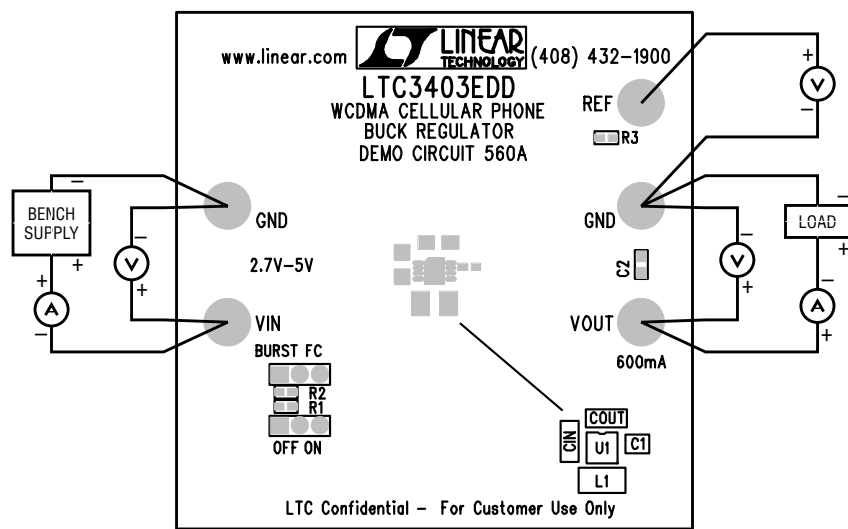


Figure 1. Proper Measurement Equipment Setup




Figure 2. Scope Probe Placement for Measuring Input or Output Ripple

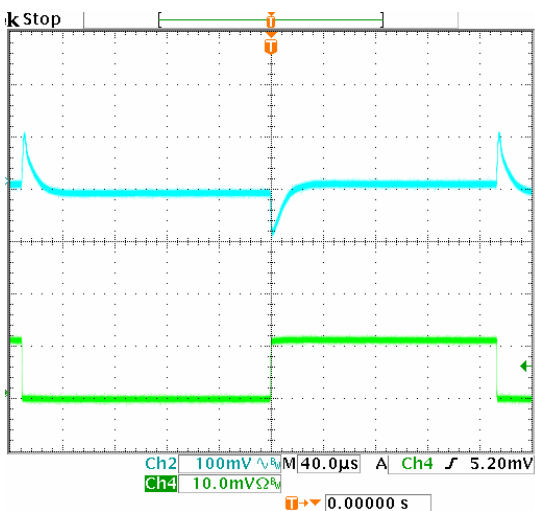


Figure 3. Ch1: VOUT (100mV / Div) Transient Response for 0 to 600mA load Step. Ch2: IOUT (500mA / Div) ($V_{IN} = 3.3V$, $V_{OUT} = 1.2V$)


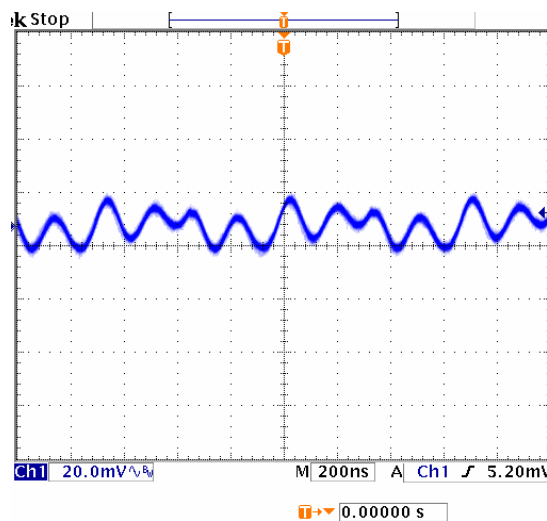



Figure 4. 1.5V Output Ripple ($V_{IN} = 3.3V$, $I_{OUT} = 600mA$)

REVISION		
ECO	REV	DESCRIPTION
	3	PROTO

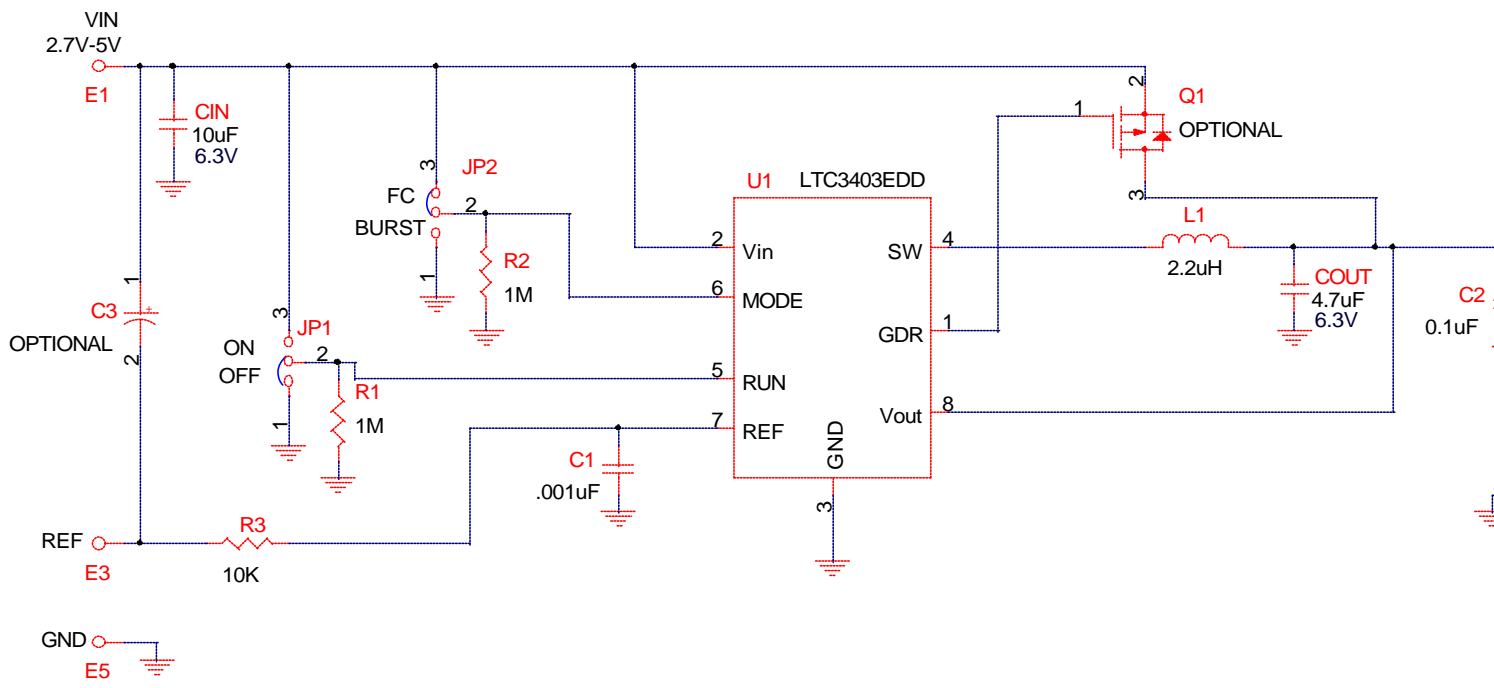

CONTRACT NO.			
APPROVALS		DATE	
DRAWN	MEI	07/30/02	TITLE
CHECKED			LTC3403EDD, WCDMA CELLUL
APPROVED			SIZE
ENGINEER			CAGE CODE
DESIGNER			DWG NO
Thursday, December 12, 2002			SCALE:
			FILENAME: 560A-3.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#)